


Specification Control Drawing

VG 95218 T023 C037 Issue 2 17th December 2019 Page 1 of 2

Page 2 is for internal use only

SEVEN CONDUCTOR CABLE, HALOGEN FREE INSULATION, SHIELDED AND HALOGEN FREE JACKETED, 600 VOLT, 150°C

The complete requirements for procuring the wire described herein shall consist of this document.

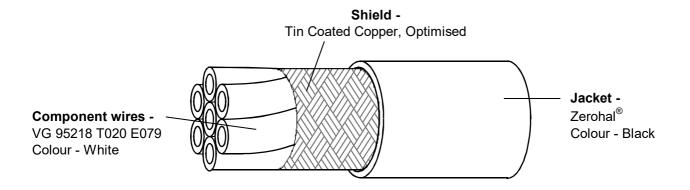

Part	Number of	Maximum	Shield	Jacket		Overall			Maximum
Description	Cores ×	Resistance	Size	Thickness		Diameter			Weight
	Nominal Cross	@ 20°C	(mm)	(mm)		(mm)			(kg/km)
	Sectional Area	(Ohms/km)							
	(mm²)			Min.	Nom.	Min.	Nom.	Max.	
VG 95218 T023 C037	7 × 1.20	15.8	0.13	0.20	0.60	7.26	7.55	7.93	150

'Zerohal' is a registered trademark of Tyco Electronics Corporation.

COLOUR CODE: Component for above cable shall be VG 95218 T020 E079.

Component colour shall be White. Jacket colour shall be Black.

PERFORMANCE Shall be tested to the issue in effect of WSD 955.

REQUIREMENTS: Shall meet the requirements of the issue in effect of VG 95218 Part 23 Specification

for Type C cables.

APPROVAL: Electronic sign off - no signatures will appear.