

Engineering Product Design

Product Construction

3 Conductor Cable Shielded and Jacketed Controlled Customer Copy B.W.B. GERMANY **Product Description**

Rev

VG 95218 T028 C007

2

Designer
Paul Cleary


Date 21/08/2019

Product Manager
Mark Johnstone

Date 21/08/2019

Component Identification

Cross-Section

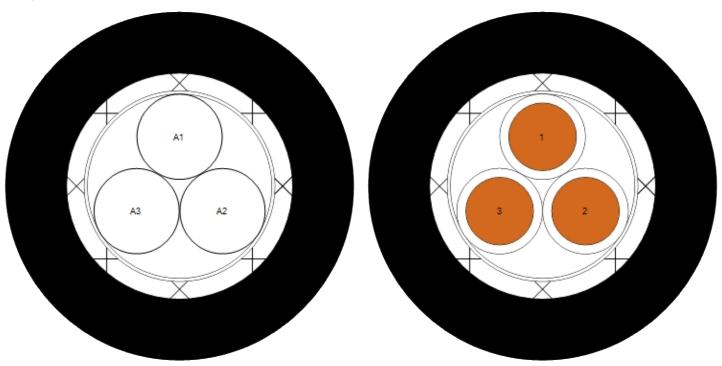

Compo	111111111111111111111111111111111111111

ID	Туре	Quantity	Part Description (Components refer to issue in effect at date of issue of this EPD)	
Α	Wire	3	VG 95218-T020-E029	

Component Identification

Key	Wire/Core Colour(s)	Wire/Core Number(s)	Jacket/Wrap Colour(s)	Jacket/Wrap Number
A1	9	1		
A2	9	2		
A3	9	3		

Cabling

Layer No	Quantity	Description	Nominal O.D. mm
Layer 1	3	VG 95218-T020-E029	2.9

Outer

Layer Type	Description	Nominal O.D. mm
Wrap:	Polyester	3.0

Tyco Electronics UK Ltd. Faraday Road, Dorcan Swindon SN3 5HH Tel: (01793) 528171 Website: www.te.com TE Connectivity is a trading name of Tyco Electronics UK Ltd, which is registered in England and Wales, number 550926.
Registered office: Faraday Road, Dorcan, Swindon, SN3 5HH

This drawing and the information set forth hereon are the property of Tyco Electronics UK Ltd, and are to be held in trust and confidence. Publication, duplication, disclosure or use for any purpose not expressly authorised in writing by Tyco Electronics UK Ltd is prohibited.

© 2019 Tyco Electronics UK Limited. A TE Connectivity Ltd company. All Rights Reserved.



Engineering Product Design

Product Construction
3 Conductor Cable
Shielded and Jacketed

Controlled Customer Copy B.W.B. GERMANY **Product Description**

Rev

VG 95218 T028 C007

2

Outer

Layer Type	Description	Nominal O.D. mm
Shield: Optimised Braid	Tin Plated Copper	3.6
Jacket: Extrusion 1	Zerohal® - Black Marked 'Raychem - VG 95218 T028 C007 - K1010 - VDE Reg.Nr. 7095'	5.5 ±0.3 Min Wall - 0.75mm

Cable Characteristics

Calculated Maximum Weight	56 (kg/km)
Maximum Surface Transfer Impedance	100 milli Ohms/metre @ 30MHz 30 milli Ohms/metre @ 10MHz

This cable is RoHS Compliant

Specifications

VG 95218 Part 28 Type C

Notes

Braid - AWG 36 Internal reference - EPD92370B

Lengths

Unless otherwise specified on your order this cable may be supplied in the following maximum number of continuous lengths with no single length less than 25m:

Order Quantity (m) + One other length 100