

Engineering Product Design

Product Construction 2 Conductor Cable Shielded and Jacketed Controlled Customer Copy B.W.B. GERMANY **Product Description**

Rev

VG 95218 T028 C033

2

Designer
Paul Cleary


Date 18/05/2020

Product Manager
Mark Johnstone

Date 18/05/2020

Component Identification

Cross-Section

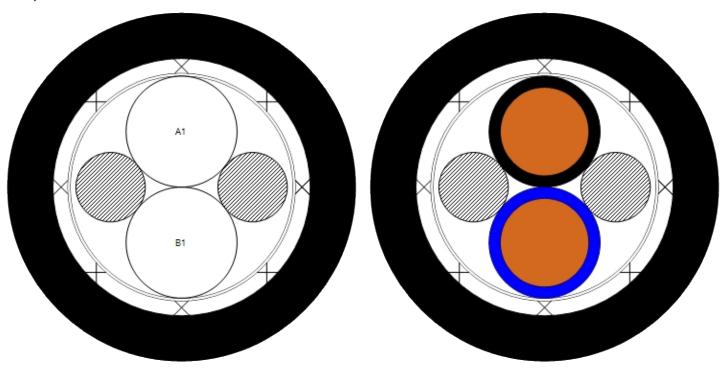

Components

ID	Туре	Quantity	Part Description (Components refer to issue in effect at date of issue of this	EPD)
Α	Wire	1	VG 95218-T020-E080	
В	Wire	1	VG 95218-T020-E086	

Component Identification

Key	Wire/Core Colour(s)	Wire/Core Number(s)	Jacket/Wrap Colour(s)	Jacket/Wrap Number
A1	0			
B1	6			

Cabling

Layer No	Quantity	Description	Nominal O.D. mm
Layer 1	1	VG 95218-T020-E080	
	1	VG 95218-T020-E086	
	2	Fillers	4.2



Engineering Product Design

Product Construction
2 Conductor Cable
Shielded and Jacketed

Controlled Customer Copy
B.W.B.
GERMANY

Product Description
VG 95218 T028 C033
2

Outer		
Layer Type	Description	Nominal O.D. mm
Wrap:	Polyester	4.3
Shield: Optimised Braid	Tin Plated Copper	4.9
Jacket: Extrusion 1	Zerohal® - Black Marked 'Raychem - VG 95218 T028 C033 - K1010 - VDE Reg.Nr. 7095 - LMGSGO(2x1.5)'	6.6 ±0.4 Min Wall - 0.70mm

Cable Characteristics	
Calculated Maximum Weight	94 (kg/km)
Maximum Surface Transfer Impedance	100 milli Ohms/metre @ 30MHz 30 milli Ohms/metre @ 10MHz
This cable is RoHS Compliant	

Specifications

VG 95218 Part 28 Type C

Notes

Braid - AWG36 Internal reference - EPD81491A

Lengths

Unless otherwise specified on your order this cable may be supplied in the following maximum number of continuous lengths with no single length less than 25m:

Order Quantity (m) + One other length 100