

Engineering Product Design

Product Construction 8 Conductor Cable

Controlled Customer Copy
B.W.B.

Product Description

Rev

2

Shielded and Jacketed GERMANY

VG 95218 T028 C050

Designer
Paul Cleary


Date 13/08/2019

Product Manager
Mark Johnstone

Date 13/08/2019

Component Identification



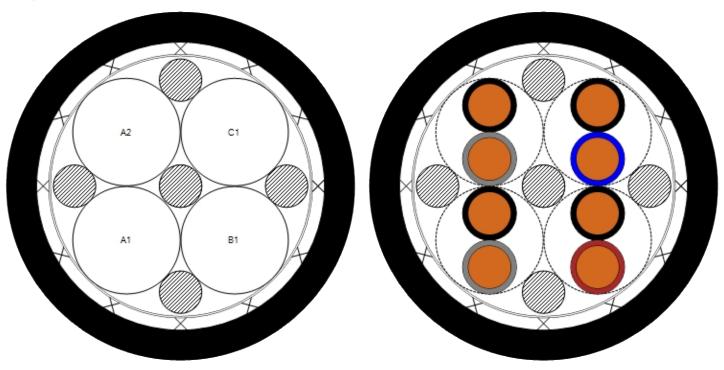

Components

ID	Туре	Quantity	Part Description (Components refer to issue in effect at date of issue of this EPD)
Α	Cable	2	VG 95218-T021-C043
В	Cable	1	VG 95218-T021-C041
С	Cable	1	VG 95218-T021-C042

Component Identification

Key	Wire/Core Colour(s)	Wire/Core Number(s)	Jacket/Wrap Colour(s)	Jacket/Wrap Number
A1	0/8			
A2	0/8			
B1	0/1			
C1	0/6			

Cabling

Layer No	Quantity	Description	Nominal O.D. mm
Layer 1	1	Filler	
Layer 2	2	VG 95218-T021-C043	
	1	VG 95218-T021-C041	

Tyco Electronics UK Ltd. Faraday Road, Dorcan Swindon SN3 5HH Tel: (01793) 528171 Website: www.te.com TE Connectivity is a trading name of Tyco Electronics UK Ltd, which is registered in England and Wales, number 550926.
Registered office: Faraday Road, Dorcan, Swindon, SN3 5HH

This drawing and the information set forth hereon are the property of Tyco Electronics UK Ltd, and are to be held in trust and confidence. Publication, duplication, disclosure or use for any purpose not expressly authorised in writing by Tyco Electronics UK Ltd is prohibited.

© 2019 Tyco Electronics UK Limited. A TE Connectivity Ltd company. All Rights Reserved.



Engineering Product Design

Product Construction

8 Conductor Cable Shielded and Jacketed Controlled Customer Copy B.W.B. GERMANY **Product Description**

Rev

VG 95218 T028 C050

2

Cabling

Layer No	Quantity	Description	Nominal O.D. mm
	1	VG 95218-T021-C042	
	4	Fillers	6.7

Outer

Layer Type	Description	Nominal O.D. mm
Wrap:	Polyester	6.8
Shield: Optimised Braid	Tin Plated Copper	7.5
Jacket: Extrusion 1	Zerohal® - Black Marked 'Raychem - VG 95218 T028 C050 - K1010 - VDE Reg.Nr. 7095 - FMGSGO - (4x2x0.75)'	9.2 ±0.5 Min Wall - 0.70mm

Cable Characteristics

Calculated Maximum Weight	162 (kg/km)	
Maximum Surface Transfer Impedance	70 milli Ohms/metre @ 30MHz 30 milli Ohms/metre @ 10MHz	
This cable is RoHS Compliant		

Specifications

VG 95218 Part 28 Type C

Notes

Braid - AWG34 Internal reference - EPD94243B

Lengths

Unless otherwise specified on your order this cable may be supplied in the following maximum number of continuous lengths with no single length less than 25m:

Order Quantity (m) + One other length 100