

Engineering Product Design

Product Construction 12 Conductor Cable Shielded and Jacketed

Controlled Customer Copy B.W.B. **GERMANY**

Product Description

Rev

VG 95218 T028 C054


2

Designer Paul Cleary **Date** 19/06/2020 **Product Manager** Mark Johnstone

Date 19/06/2020

Component Identification

Cross-Section

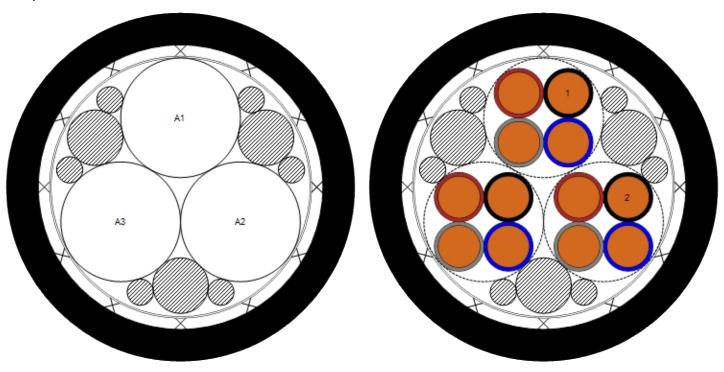

Components			
ID Type	Quantity	Part Description	(Components refer to issue in effect at date of issue of this EPD)
A Cable	3	VG 95218 T021 C0	48

Component Identification

Key	Wire/Core Colour(s)	Wire/Core Number(s)	Jacket/Wrap Colour(s)	Jacket/Wrap Number
A1	0/6/8/1	1/-/-/-		
A2	0/6/8/1	2/-/-		
A3	0/6/8/1			

Cabling

Layer No	Quantity	Description	Nominal O.D. mm
Layer 1	3	VG 95218 T021 C048	
	3	Fillers	
	6	Fillers	7.9



Engineering Product Design

Product Construction
12 Conductor Cable
Shielded and Jacketed

Controlled Customer Copy
B.W.B.
GERMANY

Product Description
VG 95218 T028 C054
2

Outer		
Layer Type	Description	Nominal O.D. mm
Wrap:	Polyester	8.0
Shield: Optimised Braid	Tin Plated Copper	8.7
Jacket: Extrusion 1	Zerohal® - Black Marked 'Raychem - VG 95218 T028 C054 - K1010 - VDE Reg.Nr. 7095 - FMGSGO - (6x2x0,75)'	10.7 ±0.6 Min Wall - 0.80mm

Cable Characteristics	
Calculated Maximum Weight	225 (kg/km)
Maximum Surface Transfer Impedance	45 milli Ohms/metre @ 30MHz
Maximum Sunace Transier impedance	30 milli Ohms/metre @ 10MHz
This cable is RoHS Compliant	

Specifications

VG 95218 Part 28 Type C

Notes

Braid - AWG34 Internal reference - EPD94244B

Lengths

Unless otherwise specified on your order this cable may be supplied in the following maximum number of continuous lengths with no single length less than 25m:

Order Quantity (m) + One other length 100