

# **Engineering Product Design**

Product Construction
16 Conductor Cable
Shielded and Jacketed

Controlled Customer Copy B.W.B. GERMANY **Product Description** 

Rev

VG 95218 T028 C059

2

**Designer** *Paul Cleary* 


**Date** 12/08/2019

Product Manager
Mark Johnstone

**Date** 12/08/2019

### **Component Identification**

### **Cross-Section**

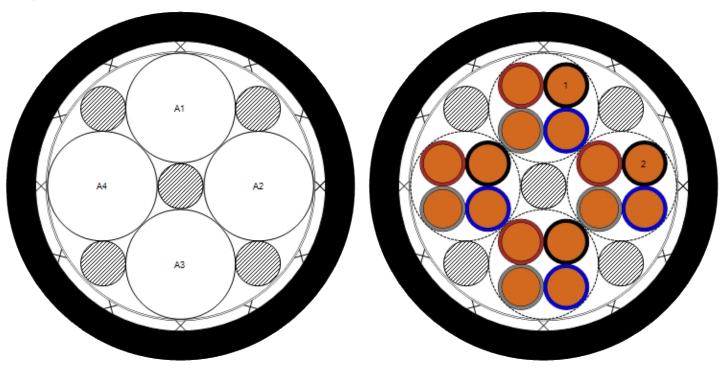

1.0	m	n	$\sim$	$\mathbf{a}$	nt	0
Co		v	UI	16	H	Э.

ID	Туре	Quantity	Part Description	(Components refer to issue in effect at date of issue of this EPD)
Α	Cable	4	VG 95218 T021 C048	

#### **Component Identification**

Key	Wire/Core Colour(s)	Wire/Core Number(s)	Jacket/Wrap Colour(s)	Jacket/Wrap Number
A1	0/6/8/1	1/-/-/-		
A2	0/6/8/1	2/-/-/-		
A3	0/6/8/1			
A4	0/6/8/1			

#### **Cabling**

Layer No	Quantity	Description	Nominal O.D. mm
Layer 1	1	Filler	
Layer 2	4	VG 95218 T021 C048	
	4	Fillers	8.8



# **Engineering Product Design**

Product ConstructionControlled Customer CopyProduct DescriptionRev16 Conductor Cable<br/>Shielded and JacketedB.W.B.<br/>GERMANYVG 95218 T028 C0592

Outer		
Layer Type	Description	Nominal O.D. mm
Wrap:	Polyester	8.9
Shield: Optimised Braid	Tin Plated Copper	9.6
Jacket: Extrusion 1	Zerohal® - Black Marked 'Raychem - VG 95218 T028 C059 - K1010 - VDE Reg.Nr. 7095 - FMGSGO - (8x2x0,75)'	11.5 ±0.5 Min Wall - 0.80mm

Cable Characteristics	
Calculated Maximum Weight	269 (kg/km)
Maximum Surface Transfer Impedance	45 milli Ohms/metre @ 30MHz 30 milli Ohms/metre @ 10MHz
This cable is RoHS Compliant	

#### **Specifications**

VG 95218 Part 28 Type C

#### **Notes**

Braid - AWG34 Internal reference - EPD94245B

## Lengths

Unless otherwise specified on your order this cable may be supplied in the following maximum number of continuous lengths with no single length less than 25m:

Order Quantity (m) + One other length 100