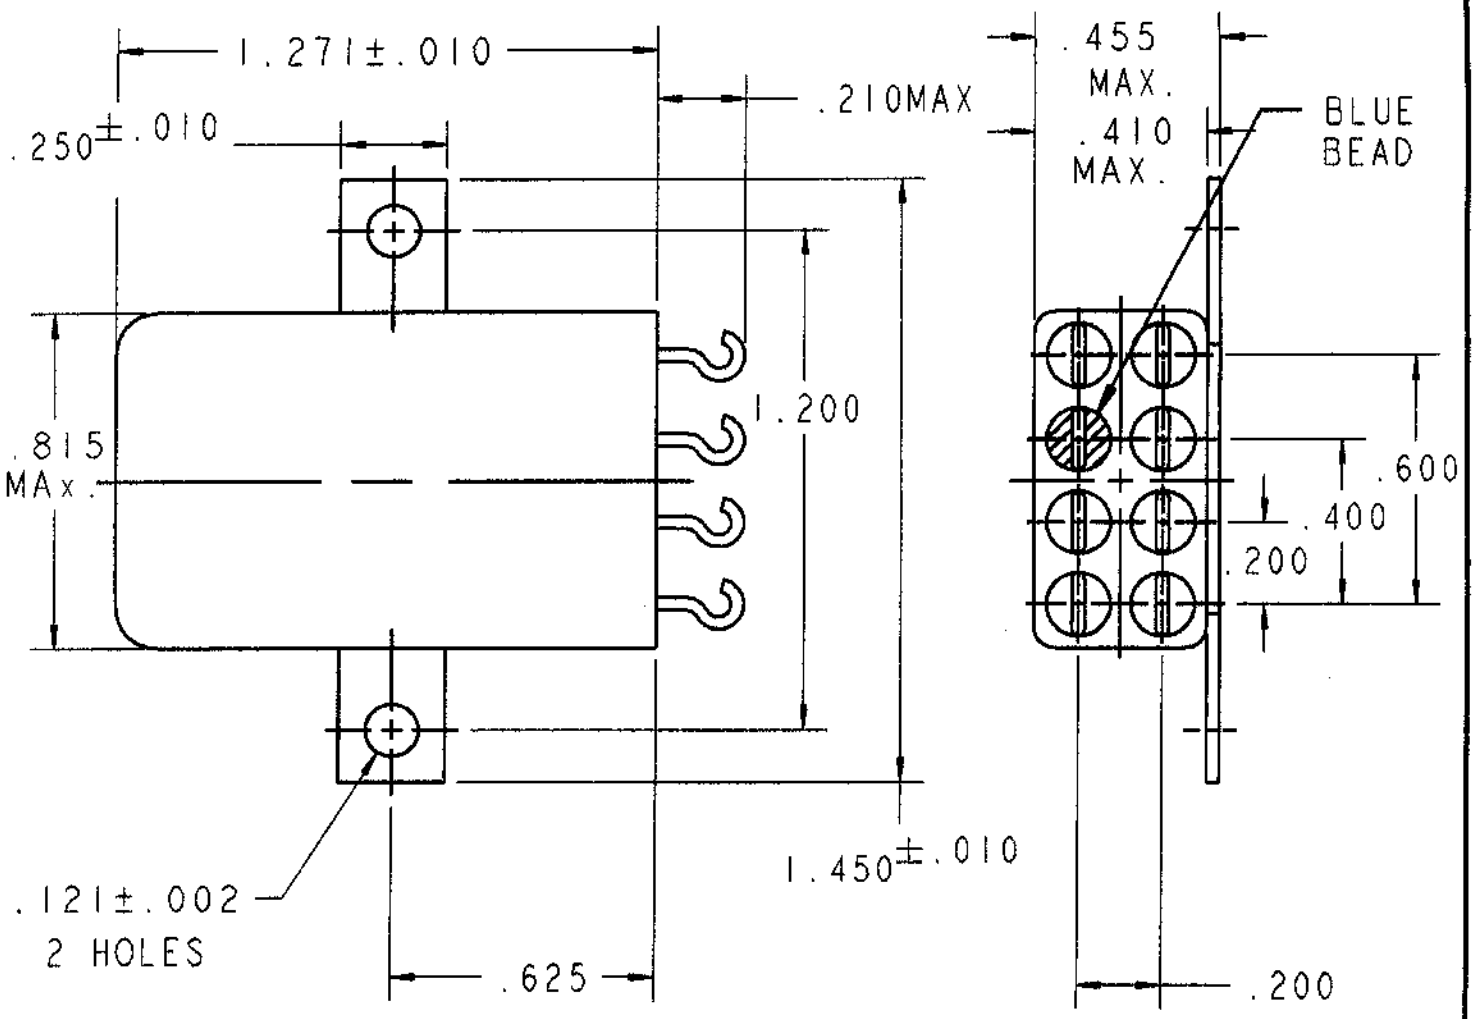

REV. 1
DCO 170528

COIL: @ 25°C

RESISTANCE	1000 OHMS ± 10%
NOMINAL VOLTAGE	13.0 mADC
MUST OPERATE	6.5 mADC
MUST RELEASE	3.1 mADC MAX 0.65 mADC MIN

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 15 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES:

OPERATE TIME 15 MS MAX.
RELEASE TIME 10 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

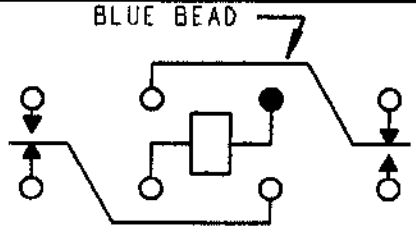

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS

DR. PBB 12/6/00 CK. TLG 7-18-01

CII Technologies™
advanced control electronic solutions

CUST. QPL
CUST. NO. M5757/13-137 REV.

3SAT RELAY

3SAT1354A2

F-718 REV. 3