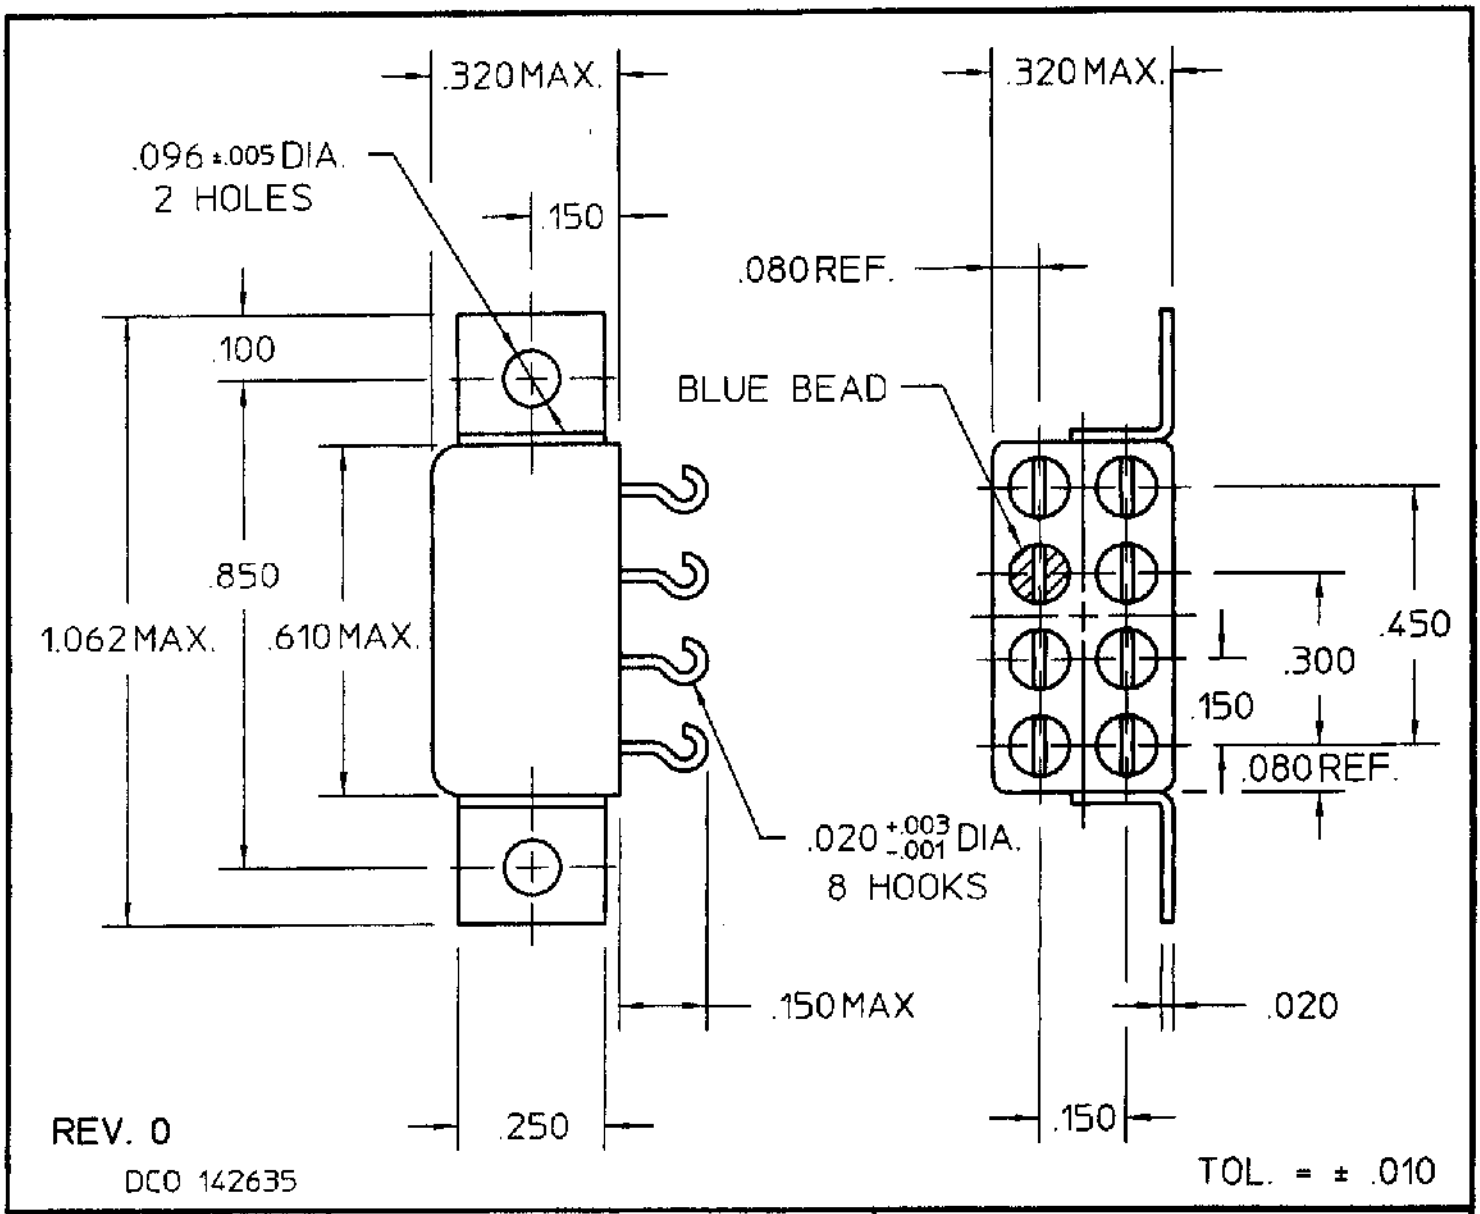

COIL: @ 25°C

RESISTANCE 210 OHMS ± 10%

NOMINAL VOLTAGE 12.0 VDC

MUST OPERATE 5.4 VDC

MUST RELEASE 3.2 VDC MAX, 0.6 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.
CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

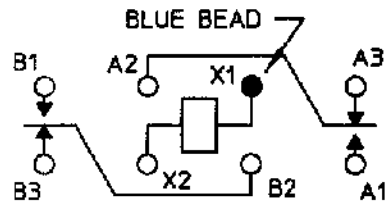

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 2 AMPS 28 VDC RESISTIVE 50,000 OPERATIONS

DR. PBB 1/16/01 CK.

CII Technologies
advanced control electronic solutions

CUST. QPL

CUST. NO. M39016/13-059M REV.

"3SBC" RELAY

3SBC1520A2

F-718 REV. 3