


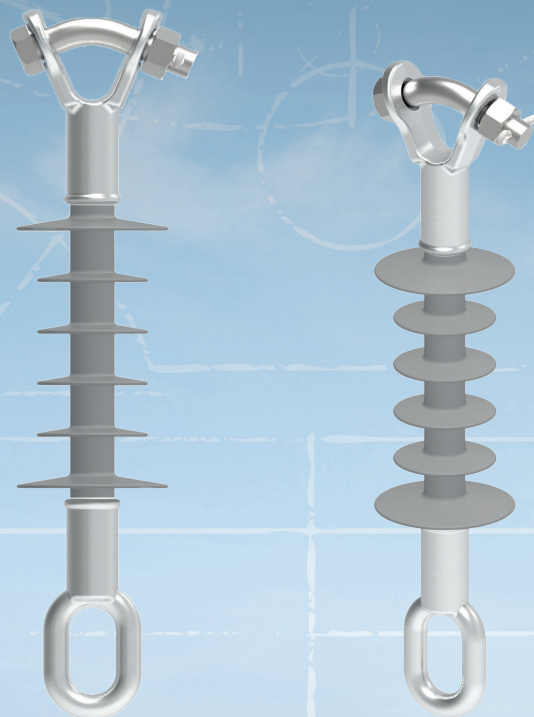

SUSPENSION INSULATOR

OVERHEAD LINE APPLICATIONS UP TO 485 kV BIL

KEY FEATURES

- 70kN tension rating (SML)
- Wide selection of metal end fittings selection
- Reliable tensile performance
- Light-weight for easier installation
- Shed design to minimize insulator length per kV rating
- Shock and vibration resistant
- Good tracking and erosion resistance performance
- Quality design and manufactured in accordance with ISO9001


TE Connectivity (TE) offers a complete range of silicone suspension / tension insulators for overhead line applications up to 485 kV BIL.

Our complete portfolio of insulators is designed to fit a wide selection of metal end fittings. The portfolio includes numerous lengths and creepage configurations to fit the requirements of your application. TE's compact insulator profile has the same shed diameter to maximize flashover performance in polluted environments over a minimum insulator length.

Our suspension / tension insulators are made of silicone, a hydrophobic material with proven tracking and erosion resistance and high technical performance in a wide range of climatic and pollution conditions.

Customers can count on consistent, high quality products, driven by TE's proven innovation and backed by our extraordinary customer support.

Suspension Insulator

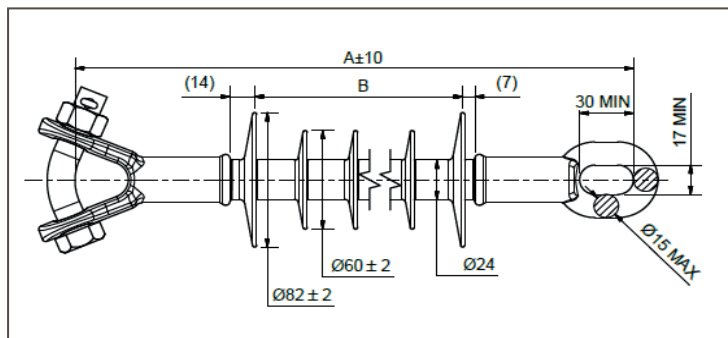

Top Fitting - Y Clevis per IEC 61466-1-16
Bottom Fitting - Eye Fitting per IEC 61466-1-17
Split Pin - Stainless steel
SML - 70 kN
Routine Test - 35 kN

Part description key

CS - Composite Suspension
XX - SML Top/Bottom End Fittings
XX - BIL (kV)
XXX - Creepage distance (mm)
XXXX - Mfg. Style
X - Special Code

PRODUCT SPECIFICATION

TCPN	DESCRIPTION	SHEDS	NOMINAL CREEPAGE (mm)	NOMINAL DRY ARC (mm)	DRY AC WITHSTAND (kV)	WET AC WITHSTAND (kV)	DRY AC FLASH-OVER (kV)	WET AC FLASH-OVER (kV)	LIGHTNING IM-PULSE WITHSTAND (kV)	LIGHTNING IM-PULSE FLASH-OVER (kV)	A (mm)	B (mm)	AP-PROX. WEIGHT (KG)	STD PACK QTY
EP1025-000	CS-70-YE-125-0340-M-11	5	340	173	80	60	90	75	125	130	317	116	1.00	36
EP1026-000	CS-70-YE-140-0400-M-11	6	400	202	90	75	100	90	140	150	346	145	1.03	36
EP1027-000	CS-70-YE-155-0460-M-11	7	460	231	100	90	110	90	155	165	375	174	1.06	18
EP1028-000	CS-70-YE-170-0520-M-11	8	520	260	110	90	120	105	170	180	404	203	1.09	18
EP1029-000	CS-70-YE-185-0585-M-11	9	585	289	120	105	130	120	185	195	433	232	1.12	18
EP1030-000	CS-70-YE-205-0645-M-11	10	645	318	130	120	135	120	205	210	462	261	1.15	18
EP1031-000	CS-70-YE-210-0705-M-11	11	705	347	140	120	145	135	210	220	491	290	1.18	18
EP1032-000	CS-70-YE-220-0765-M-11	12	765	376	150	135	155	150	220	230	520	319	1.21	18
EP1033-000	CS-70-YE-230-0830-M-11	13	830	405	160	150	165	155	230	245	549	348	1.24	18
EP1034-000	CS-70-YE-245-0890-M-11	14	890	434	170	160	175	165	245	260	578	377	1.27	18
EP1035-000	CS-70-YE-270-0950-M-11	15	950	463	180	165	185	180	270	275	607	406	1.30	18
EP1036-000	CS-70-YE-285-1010-M-11	16	1010	492	185	175	195	190	285	300	636	435	1.33	18
EP1037-000	CS-70-YE-310-1075-M-11	17	1075	521	195	185	205	200	310	325	665	464	1.36	18
EP1038-000	CS-70-YE-320-1135-M-11	18	1135	550	205	190	215	210	320	340	694	493	1.39	18
EP1039-000	CS-70-YE-335-1195-M-11	19	1195	579	215	195	225	210	335	355	723	522	1.42	18
EP1040-000	CS-70-YE-350-1255-M-11	20	1255	608	225	210	235	225	350	360	752	551	1.45	18
EP1041-000	CS-70-YE-370-1320-M-11	21	1320	637	235	225	245	240	370	390	781	580	1.48	18
EP1042-000	CS-70-YE-385-1380-M-11	22	1380	666	245	225	255	240	385	405	810	609	1.51	64
EP1043-000	CS-70-YE-400-1440-M-11	23	1440	695	255	240	265	255	400	420	839	638	1.54	64
EP1044-000	CS-70-YE-415-1500-M-11	24	1500	724	265	255	275	270	415	435	868	667	1.57	64
EP1045-000	CS-70-YE-430-1565-M-11	25	1565	753	275	255	285	270	430	455	897	696	1.60	64
EP1046-000	CS-70-YE-445-1625-M-11	26	1625	782	285	270	290	285	445	470	926	725	1.63	64
EP1047-000	CS-70-YE-460-1685-M-11	27	1685	811	295	280	300	295	460	485	955	754	1.66	64
EP1048-000	CS-70-YE-475-1745-M-11	28	1745	840	305	285	310	300	475	500	984	783	1.69	64

FOR MORE INFORMATION: TE Technical Support Centers

USA: + 1 800 327 6996
France: + 33 380 583 200
UK: + 44 0870 870 7500
Germany: + 49 896 089 903
Spain: + 34 916 630 400
Italy: + 39 333 250 0915
Benelux: + 32 16 351 731
Canada: + 1 (905) 475-6222
Mexico: + 52 (0) 55-1106-0800
Latin/S. America: + 54 (0) 11-4733-2200
China: + 86 (0) 400-820-6015

te.com/energy

©2020 TE Connectivity Ltd. All Rights Reserved. EPP-3464-DDS-1/2020

Raychem, TE Connectivity and TE Connectivity (logo) are trademarks. Other logos, product and/or company names might be trademarks of their respective owners. While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.