



MBD NTC THERMISTOR GA30K6MBD335

Description

The BetaCURVE Chip soldered to 32 AWG solid silver-plated copper wires with white PTFE insulation.

Device is potted in a polyimide tube using thermally conductive epoxy resin for mechanical protection and fast time-response.

Features

- NTC thermistor with 30,000 Ohm nominal resistance @ +25°C
- Ø 1.2mm maximum diameter
- 32 AWG solid silver-plated copper wires with white PTFE insulation
- Proven stability and reliability
- Rapid time response
- Thermally conductive epoxy coating
- Temperature range -40°C to +125°C

Applications

- Temperature sensing, control and compensation

Specifications


- 30,000 Ohms Resistance @ +25°C
- $\pm 0.1^\circ\text{C}$ Resistance Tolerance from 0°C to +70°C
- Beta $_{25/85} = 3942$

[CLICK HERE >](#)
CONNECT WITH A SPECIALIST

Performance specifications

Parameters	Units	Value
Resistance @ +25°C	Ohms	30,000
Resistance Tolerance from 0°C to +70°C	°C	+/- 0.1
Beta Value 25/85	K	3942
Tolerance on Beta Value 25/85	%	0.5
Dissipation Constant (still air at +25°C before probe mounting)	mW/°C	0.5 Typical
Time Constant (in well stirred oil bath before probe mounting)	s	0.4
Operating Temperature	°C	-40 to +125

Mechanical details

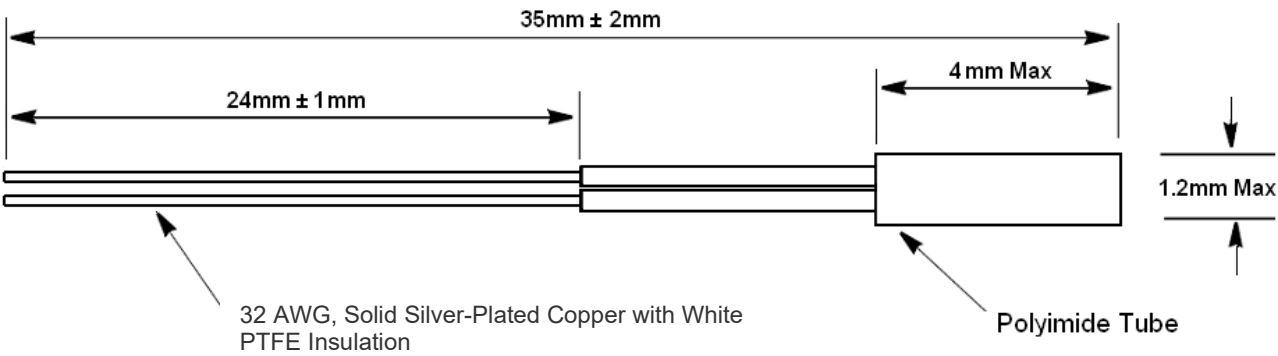

Resistance v temperature table

Temp °C	Ohms
-40	884198
-39	830463
-38	780301
-37	733457
-36	689693
-35	648790
-34	610546
-33	574773
-32	541299
-31	509964
-30	480620
-29	453130
-28	427367
-27	403213
-26	380560
-25	359305
-24	339357
-23	320627
-22	303035
-21	286506
-20	270969
-19	256362
-18	242622
-17	229694
-16	217526
-15	206069
-14	195278
-13	185111
-12	175529
-11	166495
-10	157975
-9	149937
-8	142352
-7	135191
-6	128429
-5	122041
-4	116006
-3	110301
-2	104907
-1	99806
0	94980
1	90413

Temp °C	Ohms
2	86090
3	81996
4	78119
5	74445
6	70964
7	67663
8	64534
9	61565
10	58749
11	56076
12	53539
13	51129
14	48841
15	46667
16	44601
17	42637
18	40769
19	38993
20	37303
21	35696
22	34166
23	32709
24	31321
25	30000
26	28741
27	27541
28	26398
29	25307
30	24268
31	23276
32	22329
33	21426
34	20564
35	19741
36	18955
37	18204
38	17487
39	16801
40	16146
41	15519
42	14920
43	14347

Temp °C	Ohms
44	13799
45	13274
46	12772
47	12292
48	11831
49	11391
50	10968
51	10564
52	10176
53	9805
54	9449
55	9107
56	8780
57	8466
58	8164
59	7875
60	7597
61	7331
62	7075
63	6829
64	6593
65	6366
66	6148
67	5939
68	5738
69	5544
70	5358
71	5179
72	5007
73	4841
74	4682
75	4528
76	4381
77	4239
78	4102
79	3970
80	3843
81	3721
82	3603
83	3489
84	3380
85	3274

Temp °C	Ohms
86	3172
87	3074
88	2979
89	2888
90	2800
91	2715
92	2633
93	2554
94	2477
95	2403
96	2332
97	2263
98	2197
99	2132
100	2070
101	2010
102	1952
103	1896
104	1842
105	1789
106	1739
107	1690
108	1642
109	1596
110	1552
111	1509
112	1467
113	1427
114	1388
115	1350
116	1314
117	1278
118	1244
119	1211
120	1178
121	1147
122	1117
123	1087
124	1059
125	1031

Ordering information

Part Number	Description	Resistance @ +25°C	MOQ
GA30K6MBD335	MBD NTC Thermistor	30,000	1,000*

*For orders less than MOQ, contact Sales

[CLICK HERE >](#)

CONNECT WITH A SPECIALIST

NORTH AMERICA

Tel +1 800 522 6752

EUROPE

Tel +31 73 624 6999

ASIA

Tel +86 0400 820 6015



[te.com/sensors](https://www.te.com/sensors)

TE Connectivity, TE, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2023 TE Connectivity Corporation. All Rights Reserved.