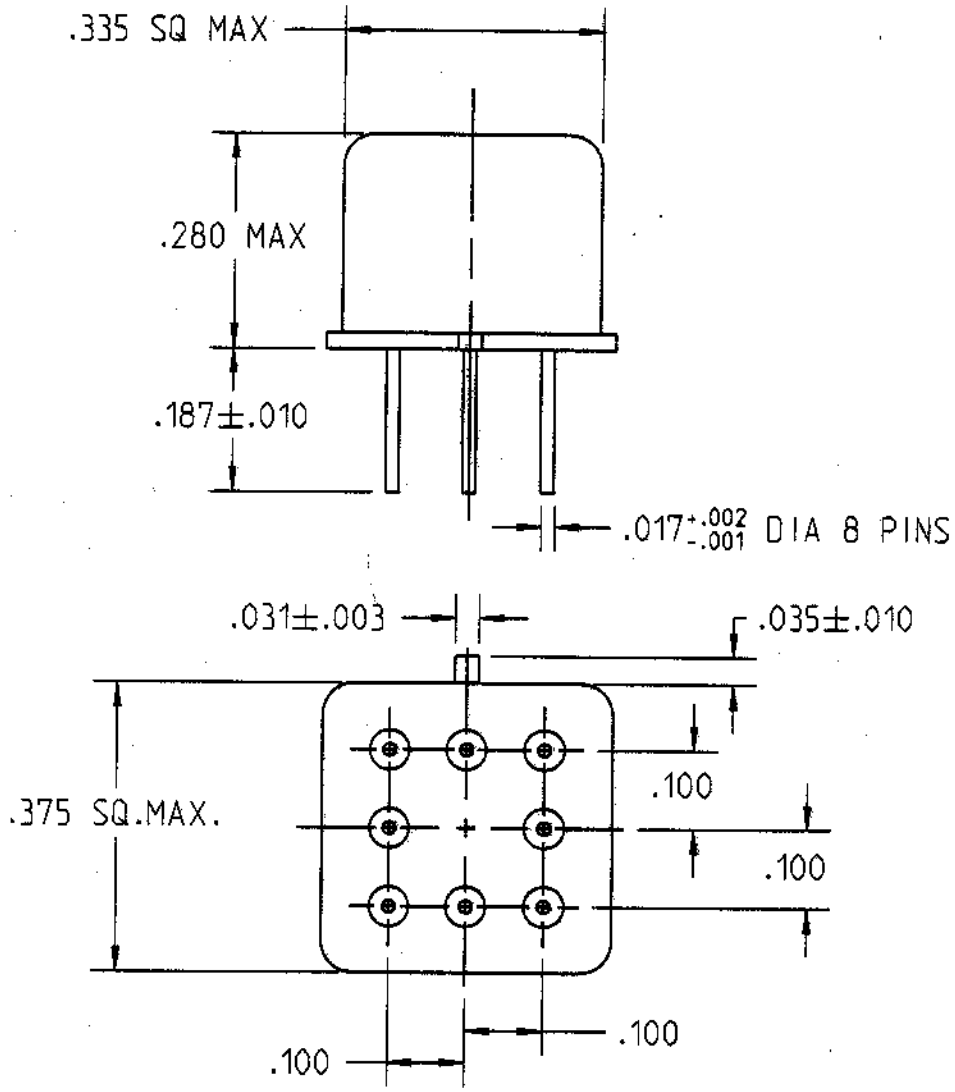

REV. 0
DCO 143667

COIL: @ 25°C

RESISTANCE 880 OHMS ±10%

NOMINAL VOLTAGE 18.0 VDC

MUST OPERATE 11.5 VDC

MUST RELEASE 7.3 VDC MAX. 1.4 VDC MIN.

ENVIRONMENT:

VIBRATION 10 Hz TO 3000 Hz @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX
RELEASE TIME 4.0 MS MAX
CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS

DR. ASB 7 OCT 02 | CK. 10/7/02

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M39016/19-029M REV.

"JMGADD" RELAY

JMGAPDD-18M

F-718 REV. 4