


Power PCB Relay T9V Solar

- 1 pole 40A, 1 form A (NO) contact
- Contact gap >1.5mm/1.8mm
- 350mW hold power¹⁾
- The appliance is able to meet VDE V 0126-1-1
- Product in accordance to IEC 60335-1
- EN61095: AC7a at 85°C
- 160A inrush current version available

Typical applications

Electrical vehicle loading stations
Electrical vehicle
Photovoltaic inverter

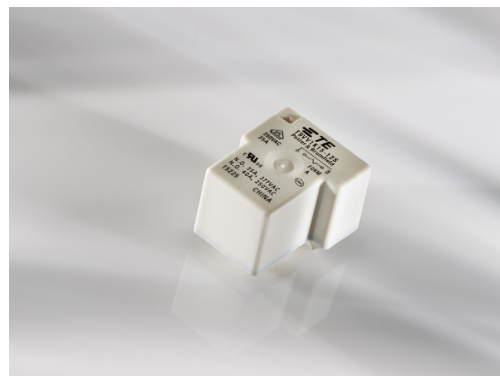

f0156_bc_inv



Approvals

VDE 40030974, UL E58304, CQC16002145203, TUV R50369970

Technical data of approved types on request

Contact Data

Contact arrangement	1 form A (NO)
Contact gap	1.5mm/1.8mm
Rated voltage	250VCA/30VDC
Rated current	40A ²⁾
Breaking capacity max.	10 000 VA
Contact material	Ag Alloy
Initial contact resistance	75mΩ max. at 1A 6VDC
Frequency of operation, with/without load	6/300min ⁻¹
Operate/release time max., incl bounce time	18/15ms

Contact ratings³⁾

Type	Contact	Load	Cycles
IEC 61810			
T9VV1K15-12S	A (NO)	35A, 250VAC, cosφ=1, 85°C	20x10 ³
UL 508			
T9VV1K15-12S	A (NO)	35A, 250VAC, resistive, 85°C	20x10 ³
T9VV1K15-12S	A (NO)	40A, 30VDC, resistive, 70°C	60x10 ³
T9VV1K15-12S	A (NO)	40A, 85°C, carry only	
CQC			
T9VV1K15-12S	A (NO)	40A, 250VAC, resistive, 60°C	20x10 ³
TUV			
T9VV1K15-12S	A (NO)	40A, 30VDC, resistive, 70°C	60x10 ³
Internal Test			
T9VV1K15-12S	A (NO)	32A, 250VAC, cosφ=1, 105°C	30x10 ³
T9VV1K19-12	A (NO)	35A, 250VAC (160A inrush 50μs make), 65°C	10x10 ³
T9VV1K15-12S	A (NO)	35A, 250VAC, resistive, 85°C	50x10 ³

Mechanical endurance, DC coil 5x10⁵ operations

Coil Data

Rated coil voltage	12VDC
Coil insulation system according UL	class F

Coil versions, DC coil

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω±10%	Rated coil power W
12	12 ¹⁾	9.6	0.8	64±10%	2.25 / min. 0.35 hold

All figures are given for coil without pre-energization, at ambient temperature +23°C.
Other coil voltages on request.

Insulation Data

Initial dielectric strength	
between open contacts	2500V _{rms}
between contact and coil	4000V _{rms}
Initial surge withstand voltage	
between contact and coil	6kV
Clearance/creepage	
between contact and coil	3/4mm
Material group of insulation parts	III
Tracking index of relay base	PTI 325

Other Data

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customer-support/rohssupportcenter

Ambient temperature	-40 to +85°C ²⁾
Category of environmental protection	
IEC 61810	RTII - flux proof
Vibration resistance (functional)	10g
Shock resistance (functional)	10g
Shock resistance (destructive)	100g
Terminal type	PCB-THT
Mounting	see note ²⁾
Mounting distance	≥10mm
Weight	appr. 30g
Resistance to soldering heat THT	
IEC 60068-2-20	260°C/5s
Packaging unit	box/500 pcs.


1) After the energization time of 100ms with 12 VDC the coil requires a reduction of the coil voltage to 4.7...6.0 VDC.

2) The relay connections and wiring have to be designed with an adequate cross sections to ensure the current flow and heat dissipation.

3) Contact ratings with relay properly vented.



Power PCB Relay T9V Solar (Continued)

Dimensions

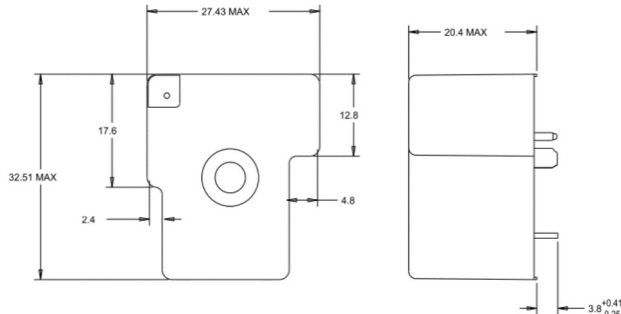


PCB layout / terminal assignment

Bottom view on solder pins

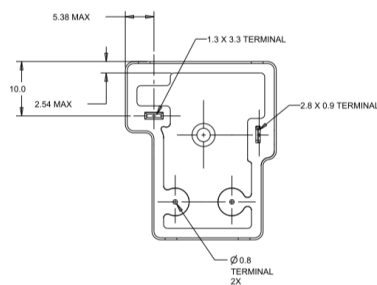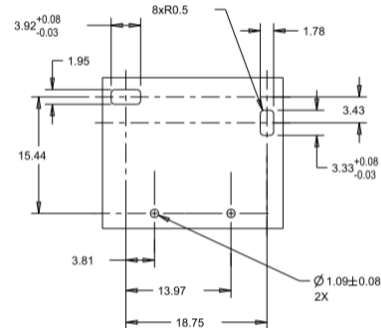

WIRING DIAGRAM
(BOTTOM VIEW)



Notes

1) General tolerance

Diagram Dimension	Tolerance
< 1 mm	±0.1
1 ~ 3 mm	±0.2
> 3 mm	±0.3

2) Dimensions of the pins after tin soldering

- a) +0.4 for the width and the thickness
b) +1.0 for the length

Product code structure

Typical product code

T9V V 1 K 1 5 -12 S

Type

T9V Power Relay T9V Series

Enclosure

V Flux-proof plastic case **S** Wash tight

Contact arrangement

1 1 Form A (1NO)

Coil input

K DC coil, 2.25W

Mounting and termination

1 PCB mounting; PCB terminals for coil and contacts

Contact material

5 AgNi **9** AgSnOInO

Coil voltage

Coil code: Please refer to coil version table

Contact gap

blank 1.5mm contact gap **S** 1.8mm contact gap

Product code	Version	Contact arrangement	Contact material	Contact gap	Coil	Part Number
T9V1K15-12S	PCB, flux tight	1 form A (NO) contact	AgNi	>1.8mm	12VDC	2027395-5
T9V1K19-12	PCB, flux tight	1 form A (NO) contact	AgSnOInO	>1.5mm	12VDC	2027395-9

Note. This list represents the most common types and does not show all variants covered by this datasheet, other types on request.