



MEAS STATOR THERMOCOUPLE

- ◆ Variety of Configurations
- ◆ Single and Dual Junctions
- ◆ Custom Designs Available

The Stator Thermocouple is a rectangular, flat, laminated sensors commonly called “Stator Sticks” because they are inserted between the coils in the stator of a motor. These sensors are used in electric motors and generators for continuous sensing of the temperature and provide for consistent thermal monitoring without false alarms. TE Stator Thermocouples are built to meet the specifications of ANSI C50.10-1990, general requirements for synchronous motors. We can build to your specifications.


Features

- ◆ Rear Exit, Epoxy Glass Laminated
- ◆ Thermocouple Type, Single and Dual:
 - » Types J, K, T, and E
- ◆ Custom Body Thickness: .060” to .375”
 - » Standard: .060”, .078”, .093”, .125”
- ◆ Custom Body Widths: .250” to 2.50”
 - » Standard: .260”, .305”, .344”, .455”, .500”, .625”
- ◆ Leadwire/Cable Options

Applications

- ◆ Electric Motors
- ◆ Generators

Dimensions

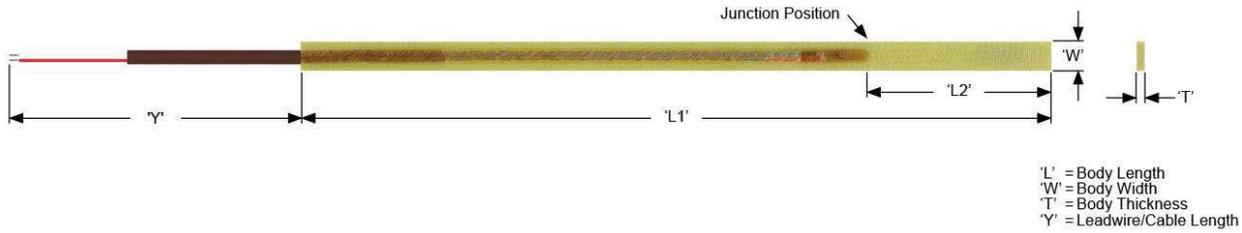

Performance Specifications

Dielectric Strength:

Class F: 3,000 volts RMS @ 60 Hz for 1 minute, between leads and external body surface
 Class H: 2,000 volts RMS @ 60 Hz for 1 minute, between leads and external body surface

Thermocouple Leadwires:

Standard: Solid conductor with extruded PTFE insulation over conductors with overall jacket
 Available: Stranded conductors and other lead coverings

Temperature Limits:

Class F: 155°C (311°F)
 Class H: 180°C (356°F)

Order Information

STATOR THERMOCOUPLE

Model	Classification	Temperature Limit	Material	Dielectric Strength
400F	Class F	155°C	Epoxy Glass	3,000 Volts
400H	Class H	180°C	Epoxy Glass	2,000 Volts

Model	Thermocouple Type	Junction	Color Code	
J	J	Single	Red/White	[Constantan/Iron]
K	K	Single	Red/Yellow	[Alumel/Chromel]
T	T	Single	Red/Blue	[Constantan/Copper]
E	E	Single	Red/Purple	[Constantan/Chromel]
JJ	JJ	Dual	Red/White // Red/White	[Constantan/Iron]
KK	KK	Dual	Red/Yellow // Red/ Yellow	[Alumel/Chromel]
TT	TT	Dual	Red/Blue // Red/Blue	[Constantan/Copper]
EE	EE	Dual	Red/Purple // Red/Purple	[Constantan/Chromel]

Model Junction Style

G Grounded (Requires Separate Ground Wire (Green) Welded to Each Thermocouple Junction)
 U Ungrounded

Model 'L1' Body Length

---- Define 'L1' Length in Inches
 Example: (12.00 = 12.00"; 6.25 = 6.25")

Model Limits of Error

A Standard Limits of Error
 B Special Limits of Error

Model 'L2' Junction Position

---- Define 'L2' Length in Inches
 Example: (6.00 = 6.00"; 1.50 = 1.50") Note: Standard Length = 1/2 x 'L1' (Minimum .50")

Model 'T' Body Thickness Standard Leadwires

A	.060"	24 AWG
B	.078"	24 AWG
C	.093"	20 AWG
D	.125"	20 AWG

MEAS STATOR THERMOCOUPLE

Model 'W' Body Width

A	.260" (Single Junction Only)
B	.305"
C	.344"
D	.455"
E	.500"
F	.625"

Model 'Y' Leadwire/Cable Options

---- Define 'Y' Length in Whole Inches (120 = 120.0"; 036 = 36.0")

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
Tel: 800-522-6752
customercare.ando@te.com

EUROPE

Measurement Specialties (Europe), Ltd.,
a TE Connectivity Company
Tel: 800-440-5100
customercare.tlse@te.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
Tel: 0400-820-6015
customercare.chdu@te.com

te.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2016 TE Connectivity Ltd. family of companies All Rights Reserved.