



## MODEL 44035

### Precision Epoxy NTC Thermistor

- 100 ohm Resistance @ 25°C
- Interchangeable  $\pm 0.2^{\circ}\text{C}$ ,  $-40^{\circ}\text{C}$  to  $50^{\circ}\text{C}$
- Pressed Disk Ceramic Sensor
- High sensitivity
- Thermally conductive epoxy coating
- 0.095" (2.4 mm) Maximum Diameter
- 32 AWG, 3" (7.6 cm) long Silver plated copper leads
- RoHS Compliant

#### FEATURES

- 100 Ohm Resistance @ 25°C
- Interchangeability
- Good Long Term Stability
- High Sensitivity
- Thermally Conductive Epoxy Coating
- RoHS Compliance

#### APPLICATIONS

- Low Temperature Applications
- Tight Tolerance Instrumentation
- General Applications Requiring Stability
- Applications Requiring Sensing Small Changes in Temperature
- Non-condensing Moisture Environments
- Allows use in Applications World-wide


## MODEL 44035

Precision Epoxy NTC Thermistor

### PERFORMANCE SPECS

Parameter	Units	Value
Resistance @ 25°C	Ohms	100
Tolerance 0°C to 70°C	°C	± 0.2
Beta Value 25/85	K	2873
Tolerance on Beta Value	%	0.8
Time response in air	Seconds	< 10
Dissipation Constant in air	mW/°C	1
Insulation Resistance (Min. of 100 Mohms for 1 sec.)	Volts	500

### MECHANICAL DETAILS

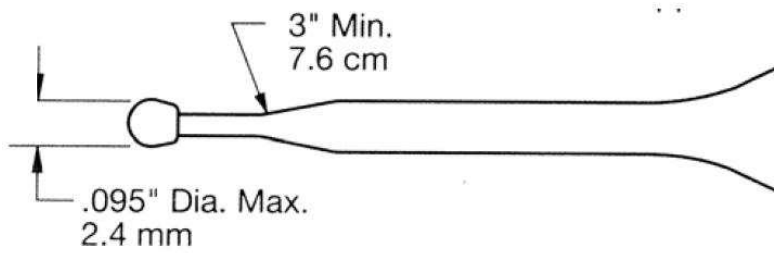

**TYPICAL PERFORMANCE CURVES (RESISTANCE OF INDIVIDUAL THERMISTORS)**

Temp °C	K-Ohms	Temp °C	K-Ohms	Temp °C	K-Ohms	Temp °C	K-Ohms
-80	14.470	-35	1.073	10	0.1659	55	0.0415
-79	13.510	-34	1.023	11	0.1601	56	0.0404
-78	12.620	-33	0.975	12	0.1546	57	0.0393
-77	11.800	-32	0.930	13	0.1493	58	0.0383
-76	11.040	-31	0.887	14	0.1442	59	0.0373
-75	10.330	-30	0.846	15	0.1394	60	0.0364
-74	9.672	-29	0.808	16	0.1347	61	0.0354
-73	9.061	-28	0.771	17	0.1302	62	0.0345
-72	8.494	-27	0.736	18	0.1259	63	0.0337
-71	7.966	-26	0.704	19	0.1217	64	0.0328
-70	7.475	-25	0.673	20	0.1177	65	0.0320
-69	7.018	-24	0.643	21	0.1139	66	0.0312
-68	6.592	-23	0.615	22	0.1102	67	0.0304
-67	6.195	-22	0.588	23	0.1067	68	0.0297
-66	5.825	-21	0.563	24	0.1033	69	0.0290
-65	5.479	-20	0.539	25	0.1000	70	0.0283
-64	5.157	-19	0.516	26	0.0969	71	0.0276
-63	4.856	-18	0.494	27	0.0938	72	0.0269
-62	4.575	-17	0.474	28	0.0909	73	0.0263
-61	4.312	-16	0.454	29	0.0881	74	0.0256
-60	4.066	-15	0.435	30	0.0854	75	0.0250
-59	3.835	-14	0.417	31	0.0828	76	0.0245
-58	3.620	-13	0.400	32	0.0803	77	0.0239
-57	3.418	-12	0.384	33	0.0778	78	0.0233
-56	3.229	-11	0.369	34	0.0755	79	0.0228
-55	3.051	-10	0.354	35	0.0732	80	0.0223
-54	2.885	-9	0.340	36	0.0711	81	0.0218
-53	2.729	-8	0.327	37	0.0690	82	0.0213
-52	2.582	-7	0.314	38	0.0670	83	0.0208
-51	2.445	-6	0.302	39	0.0650	84	0.0203
-50	2.315	-5	0.290	40	0.0631	85	0.0199
-49	2.194	-4	0.279	41	0.0613	86	0.0194
-48	2.079	-3	0.268	42	0.0596	87	0.0190
-47	1.972	-2	0.258	43	0.0579	88	0.0186
-46	1.870	-1	0.249	44	0.0562	89	0.0182
-45	1.775	0	0.239	45	0.0547	90	0.0178
-44	1.685	1	0.230	46	0.0531	91	0.0174
-43	1.600	2	0.222	47	0.0517	92	0.0170
-42	1.521	3	0.214	48	0.0502	93	0.0166
-41	1.445	4	0.206	49	0.0489	94	0.0163
-40	1.374	5	0.199	50	0.0475	95	0.0159
-39	1.307	6	0.192	51	0.0462	96	0.0156
-38	1.244	7	0.185	52	0.0450	97	0.0153
-37	1.184	8	0.178	53	0.0438	98	0.0150
-36	1.127	9	0.172	54	0.0426	99	0.0146
						100	0.0143

## MODEL 44035

Precision Epoxy NTC Thermistor

### ORDERING INFORMATION

Part Number	Description	$\Omega$ @25°C
701035	44035RC,THERM,ROHS COMPLIANT	100

#### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity Company  
Tel: 800-522-6752  
[customercare.ando@te.com](mailto:customercare.ando@te.com)

#### EUROPE

Measurement Specialties (Europe), Ltd.,  
a TE Connectivity Company  
Tel: 800-440-5100  
[customercare.tfse@te.com](mailto:customercare.tfse@te.com)

#### ASIA

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
Tel: 0400-820-6015  
[customercare.chdu@te.com](mailto:customercare.chdu@te.com)

#### [te.com/sensorsolutions](http://te.com/sensorsolutions)

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties (MEAS), American Sensor Technologies (AST), TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2016 TE Connectivity Ltd. family of companies All Rights Reserved.