



EET-...V-4-W LABEL, DATA SHEET

1. INTRODUCTION.....	2
2. LABEL DETAILS.....	2
3. PRINTER & SOFTWARE INFORMATION	3
4. ENVIRONMENTAL COMPLIANCE INFORMATION	3

THIS IS A CLASS 1 DOCUMENT WHICH IS NONCONFIDENTIAL.

The information contained within this document is the property of TE Connectivity. It is supplied in confidence and the commercial security of the contents must be maintained. It must not be used for any purpose other than that for which it is supplied nor may any information contained in it be disclosed to unauthorised persons. It must not be reproduced in whole or in part without obtaining written permission from TE Connectivity (TE).

While TE has made every reasonable effort to ensure the accuracy of the information in this catalog, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

*Trademark. TE Connectivity, TE connectivity (logo), and TE (logo) are trademarks. Other logos, product and/or company names may be trademarks of their respective owners.



1. INTRODUCTION

EET-...V-4-W are soft vinyl self-adhesive, Thermal Transfer (TT) printable labels.

2. LABEL DETAILS

Label material	Soft vinyl, gloss yellow	
Typical Dimensions:		
Label - thickness	0.07 mm \pm 10%	ASTM D1593
Release Liner - thickness	0.055mm \pm 10%	ASTM D1593
Typical peel Adhesion at 23°C	Stainless steel 1000 N/m	FTM 1 (72-hour dwell) Average values
Service Temperature	-30°C to +80°C	
Minimum application temperature	+10°C	
Print permanence	Dry rub Print legible after 70 rubs	SAE AS 5942
Storage stability	1 years at +21°C and 50% RH	
Printability	Thermal transfer	
Physical Properties at 23°C:		
Tensile strength	28N/cm min	ASTM D 882
Elongation	200% min	



3. PRINTER & SOFTWARE INFORMATION

Print quality and print performance can only be guaranteed, when specific TE printer and ribbons are used.


The current list of recommended printers and ribbons can be found in TE document 411-121005 'Identification Printer Product Ribbon Matrix'. This document can be found using the following link: [DOCUMENT/PART NUMBER SEARCH](#)



SOFTWARE INFORMATION

WINTOTAL software, is available to download for a 14-day evaluation period from the Identification Printer Software page: [SOFTWARE DOWNLOAD PAGE](#)

Print Easy software is also available. Contact a TE representative for further information.

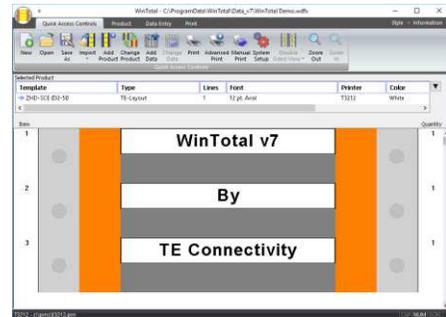

4. ENVIRONMENTAL COMPLIANCE INFORMATION

A downloadable declaration and further information covering RoHS and REACH compliance can be found at the 'TE Product Compliance Support Centre': [PRODUCT COMPLIANCE](#)