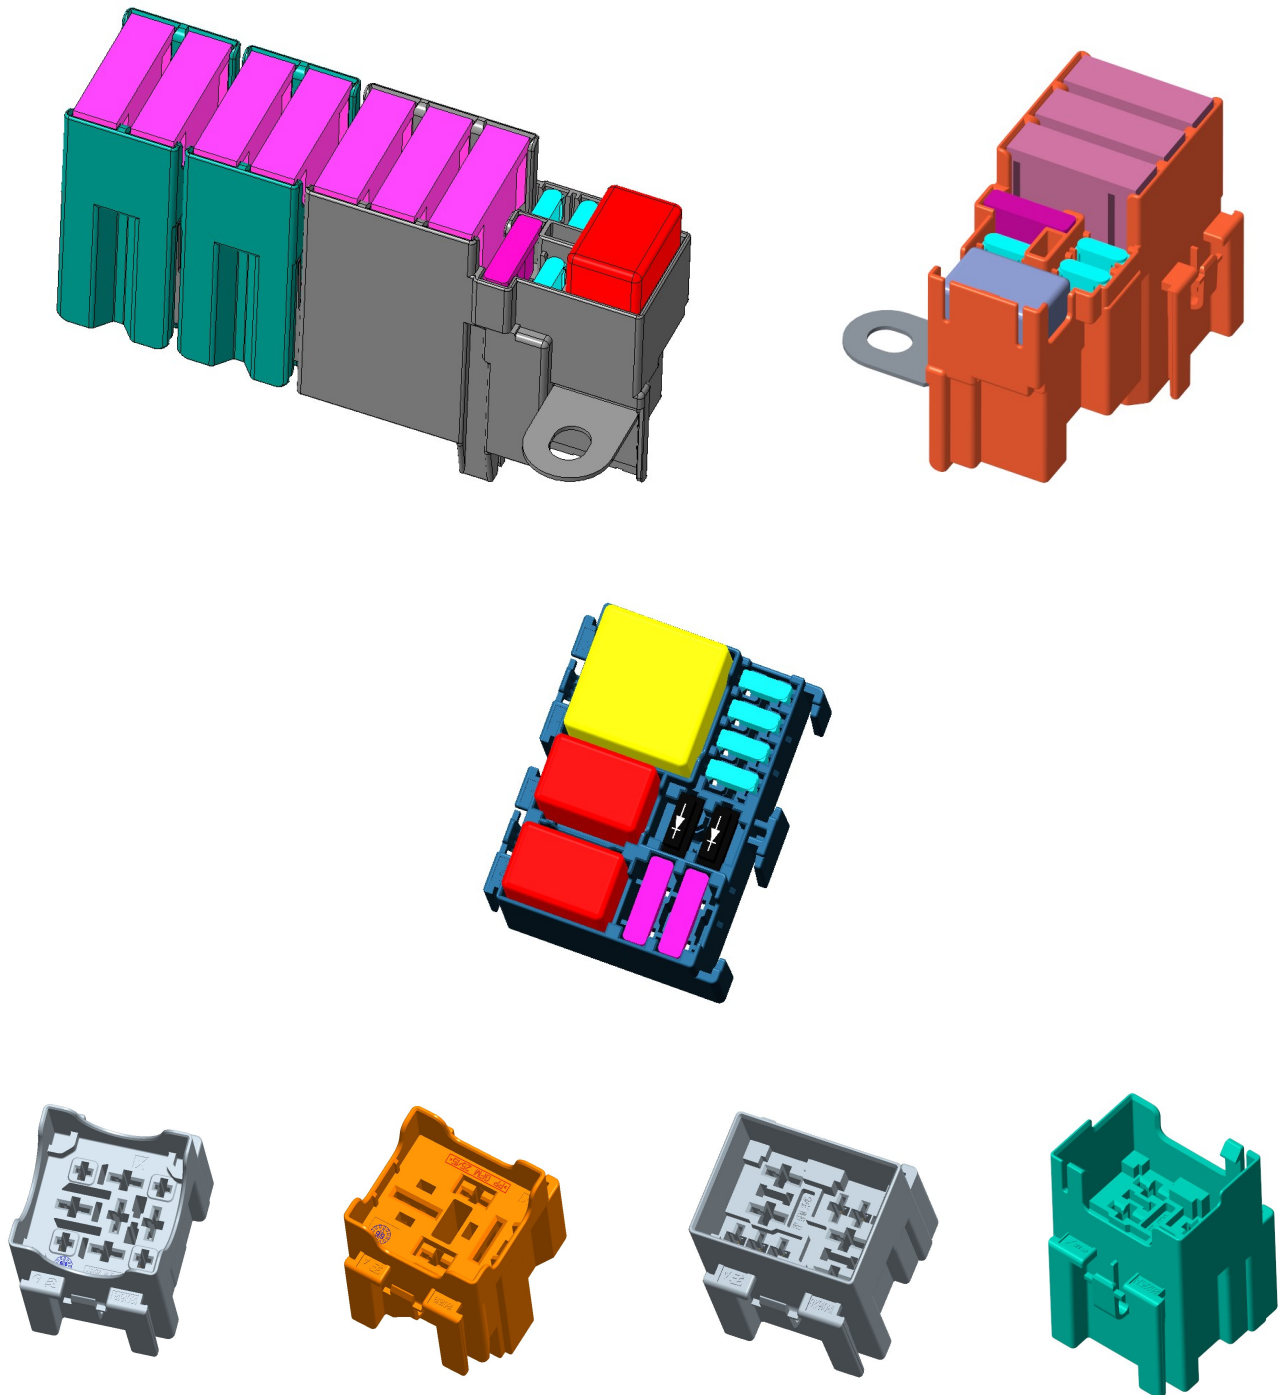


ENGINE COMPARTMENT FUSE AND RELAY BOX ERFB AND RELAYS HOLDERS



Rédigé par/Drawing by : O.Bouillot

le 28-February 2020

Approuvé par/Approved by : I.SMIRANI 28-February-2020

Tyco Electronics France SAS
1 rue Ampère,
95300 Pontoise

©2005 Tyco Electronics Corporation
All International Rights Reserved
(Tous droits réservés)

1 of 39

Ce document est sujet à modifications. Contacter Tyco Electronics pour identifier la dernière révision et en obtenir une copie. Personnel Tyco Electronics France : consultez la base de données Startec.

This document, managed by Tyco Electronics France, is archived in the Startec database.

A printout cannot be considered as a controlled document

**Product Specification:****ENGINE COMPARTMENT FUSE AND RELAY BOX
ERFB AND RELAYS HOLDERS****108-15407**

February 28th, 2020 – Rev. D

TABLE DES REVISIONS – *REVISION TABLE*

Revision	Date	Responsable	Modification
A	04/07/2012	T. VERNIER	Change Tyco Electronics for TE Connectivity Modification of requirements for test M1, M3, M4, M7, M9, M10, M12, M15, M17, M22, M31-32, M37 & O1 Clarification of requirement for test E1 Update 6.2 Program approval tests
B	03/03/2014	A. METTAVANT	Add other contacts, Program approval test for duplication tools of ERFB BOX and CRFB BOX 3 V2 into the BIM. Add test M26 & M27-
C	05/01/2018	A. METTAVANT	Add new reference ERFB BOX 4 HIGH CURRENT FUSES. Add DVP specific to ERFB BOX 4 MAXIFUSE. Add Test M39. Add Appendix 10 into the test T1 & T2
D	28/02/2020	O. BOUILLOT	Add new references ERFB BOX 3 HIGH CURRENT FUSES for NISSAN Add new reference 2 MICRO RELAY HOLDER for NISSAN Add specific DVP for ERFB BOX 3 NISSAN and 2 MICRO RELAY HOLDER NISSAN.

CONTENTS:

1. SCOPE	4
1.1. Content	4
2. DESCRIPTION	4
2.1. Composition of ERFB boxes	4
2.2. Relays holders	5
2.3. References	6
2.4. Overview	6
2.5. Electrical synoptic and fuse architecture: see appendix 1	6
2.6. Wiring architecture see appendix 2	6
2.7. Contacts used in the ERFB	7
2.8. Others contacts used for PNs 1801628-1/2/3 and 1801773-1	7
3. REFERENCE DOCUMENTS	8
3.1. Usable document	8
3.2. TE Connectivity specifications	8
3.3. Customer specifications (Renault)	8
4. Operating conditions	9
4.1. Temperatures	9
4.2. Water tightness & Protection rating	9
4.3. Vibration	9
4.4. Load scenario current at 85°C	9
5. TESTS	9
5.1. Test conditions:	9
6. QUALITY INSURANCE MEASURE	17
6.1. Qualification test	17
6.2. Program approval tests	18
6.3. Program approval tests for duplication tool of the main ERFB Holder in ERFB BOX	
3/5/7 High Current Fuses:	20
6.3.1. Renault version	20
6.3.2. Nissan version	21
6.4. Program approval tests for ERFB BOX 4 HIGH CURRENT FUSES.	22
6.5. Program approval tests for CRFB BOX 3 V2 PN 1801773-1	23
6.6. General conditions of test	24
6.7. Test and conformity	24
Appendix 1 : Electrical synoptic and fuse architecture	25
Appendix 2 : Wiring architecture	26
Appendix 3 : Current load scenarios at 85°C	27
Appendix 4 : Current load scenarios at 40°C	28
Appendix 5 : Current load scenarios at 85°C	29
Appendix 6 : Contact resistance	32
Appendix 7: Vibration profile	33
Appendix 8: Temperature humidity cycle	34
Appendix 9: Description of mechanical tests on boxes	35
Appendix 10 : Current load scenarios at 85°C FOR ERFB 4 HIGH CURRENT FUSES	36













1. SCOPE



1.1. Content

This document covers the performances, tests, and quality requirements for all boxes ERFB (Engine Relay Fuse Box) used on the engine compartment. Due to the modular aspect of the boxes, different combinations can exist on the vehicle.





2. DESCRIPTION

2.1. Composition of ERFB boxes

	As delivered from TE	Final Assembly (for indication only)
ERFB BOX 7 HIGH CURRENT FUSES		
ERFB BOX 5 HIGH CURRENT FUSES		
ERFB BOX 4 HIGH CURRENT FUSES		
ERFB BOX 3 HIGH CURRENT FUSES (RENAULT)		
ERFB BOX 3 HIGH CURRENT FUSES WITH LOCKING LATCH FOR RELAY (NISSAN)		
ERFB BOX 3 HIGH CURRENT FUSES WITHOUT LOCKING LATCH FOR RELAY (NISSAN)		

	As delivered from TE	Final Assembly (for indication only)
CRFB – BOX 3 Or CRFB BOX 3 V2		

2.2. Relays holders

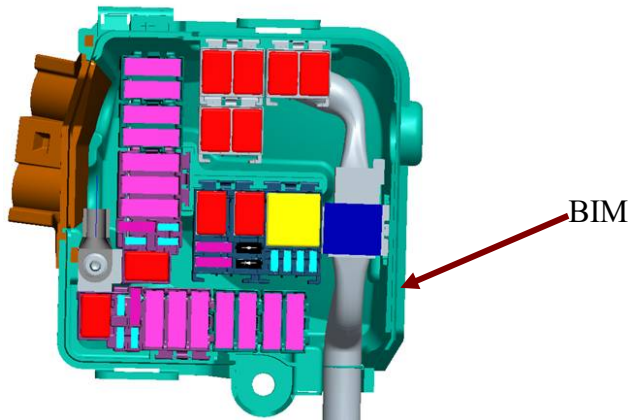
Relay ISO 40A Holder	Relay ISO 70A Holder
	
2 Micro-Relays Holder	
Renault version	Nissan Version
	

2.3. References

Nissan Ref.	Renault Ref.	TE P/N	Description
/	243 512 602R	1801628-1	ERFB BOX – 3 High current fuses
24381 6LA5A	/	1802254-1	ERFB BOX – 3 High current fuses with latch for relay
TBD	/	1802254-2	ERFB BOX – 3 High current fuses without latch for relay
/	243 514 171R	1801628-2	ERFB BOX – 5 High current fuses
/	243 510 925R	1801628-3	ERFB BOX – 7 High current fuses
/	243 515 881R	1801617-1	CRFB – BOX 3
/	243 805 704R	1801773-1	CRFB – BOX 3 V2
/	243 809 443R	1801618-1	Relay ISO 40A Holder
/	243 808 725R	1801619-1	Relay ISO 70A Holder
/	243 801 496R	1801620-1	2 Micro-Relays Holder
24383 6LA0A	/	1802257-1	2 Micro-Relays Holder

2.4. Overview

The view below shows the BIM full equipped with all components.



2.5. Electrical synoptic and fuse architecture: _____ see appendix 1

2.6. Wiring architecture _____ see appendix 2



2.7. Contacts used in the ERFB

Clip, tab description	Wire (mm ²)	RSA P/N	TE P/N	Use
Clip JPT Type	0,2 ² to 0,5 ²	8200 943 862	0-964280-2	Miniature Fuse & Micro relay & cavity SBB
Clip JPT Type A	0,5 ² to 1 ²	8200 943 856	0-964284-2	Miniature Fuse & Micro relay & cavity SBB
Clip JPT Type A	>1 ² - to 2,5 ²	8200 943 851	0-965999-2	Miniature Fuse & cavity SBB
Clip JPT Type A	>2.5 ² to 4 ²	8 200 790 713	0-1241978-1	Miniature Fuse & cavity SBB
Clip SPT	0.5 ² to 1 ²	7 703 497 431	0-0927831-2	Medium fuse & Micro, 40A 70A relays
Clip SPT	1 ² to 3 ²	7 703 497 424	0-0144617-1	Medium fuse & Micro, 40A 70A relays
Clip SPT	3 ² to 5 ²	7 703 497 403	0-0144433-1	Medium fuse & Micro, 40A 70A relays
Clip MPT	2.5 ² to 4 ²	8 200 057 143	0-0962928-1	For 70A relays
Clip MPT	4 ² to 6 ²	8 200 046 228	0-0962930-1	For 70A relays
Clip MPT	7 ² to 10 ²	8 200 046 229	0-0962932-1	For 70A relays
Clip 8 MM MAXIFUSE+	2,5 ² to 4 ²	8200945148	0-1801431-1	High current fuse
Clip 8 MM MAXIFUSE+	5 ² à 6 ²	8200945223	0-1801432-1	High current fuse
Clip 8 MM MAXIFUSE+	7 ² à 10 ²	8200945209	0-1801433-1	High current fuse

2.8. Others contacts used for PNs 1801628-1/2/3 and 1801773-1

Clip, tab description	Wire	RSA P/N	Supplier	P/N	Use
Clip 2.8 AFK	0,35 ²	7703497833	LEAR	26700201185	Miniature fuse & Micro relay
Clip 2.8 AFK	0,5 ² to 1 ²	7703497835	LEAR	26701201185	Miniature fuse & Micro relay
Clip 2.8 AFK	1.25 ² to 2,5 ²	7703497837	LEAR	26705201185	Miniature fuse
Clip 2.8 DSC2	0,2 ² - to 0,35 ²	7703497879	FCI	60012811	Miniature fuse & Micro relay
Clip 2.8 DSC2	0.5 ² to 1 ²	7703497880	FCI	60012831	Miniature fuse & Micro relay
Clip 2.8 DSC2	1 ² to 2.5 ²	7703497881	FCI	60012841	Miniature fuse
Clip 4.8 AFK	0.35 ²	7703497845	LEAR	26697330186	Medium fuse & Micro relays
Clip 4.8 AFK	0.5 ² to 1 ²	7703497846	LEAR	26649330186	Medium fuse & Micro relays
Clip 4.8 AFK	1.4 ² to 2.5 ²	7703497847	LEAR	26648330186	Medium fuse & Micro relays
Clip 4.8 AFK	3 ² to 4 ²	7703497848	LEAR	26650330186	Medium fuse & Micro relays



Product Specification:

ENGINE COMPARTMENT FUSE AND RELAY BOX ERFB AND RELAYS HOLDERS

108-15407

February 28th, 2020 – Rev. D

3. REFERENCE DOCUMENTS

3.1. Usable document

In the event of conflict between the requirements of this specification and the drawing, the drawing shall take precedent.

In the event of conflict between the requirement of this specification and the referenced documents, this specification shall take precedent.

3.2. TE Connectivity specifications

108-18013 rev E	JPT contact
108-18025 rev G	SPT contact
108-15122 rev A	SPT contact
108-15392 rev A	8mm MaxiFuse + contact

3.3. Customer specifications (Renault)

403/CM/MO/65660/09 --B	Ensemble Boitier Fusible Relais Moteur
36-05-219/--C	Wired part for relay and / or fuses
36-05-019/--G	Electrical connections and connectors
36-05-205/--E	Flat fuses with connector blades
36-05-210/--C	Plastic connector supports and protectors for electrical wiring assemblies and wiring components.
36-05-217/--A1	Relay with diode
36-05-046/---	Relay with resistor

4. OPERATING CONDITIONS

4.1. Temperatures

Class(*)	Operating temperature	Test temperature *	
3	-40°C to 125°C	+150°C	For electrical connection area
2	-40°C to +100°C	+125°C	For locking devices

(*): Without current load

4.2. Water tightness & Protection rating

- Water tightness: Class 0 - Unsealed

4.3. Vibration

- Class 1 according to 36-05-019/--E § 6.6

4.4. Load scenario current at 85°C

- : See appendix 3

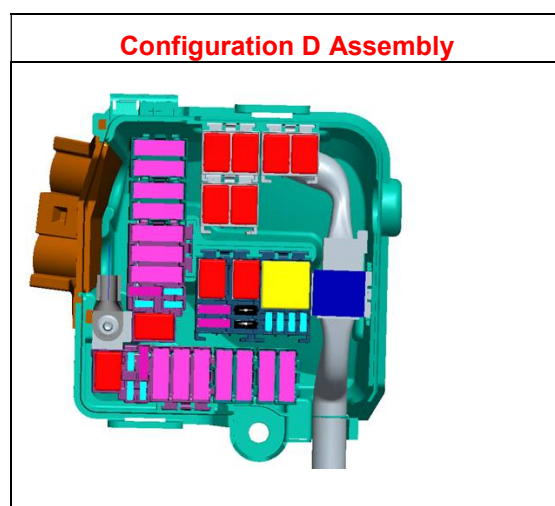
5. TESTS

5.1. Test conditions:

- Supply voltage: 13.5V ± 0.5V
- Ambient temperature: 23°C ± 5°C
- Relative humidity: 60%± 15%
- Atmospheric pressure: 96kPa ± 10kPa
- If not over wised specified mechanical test: v = 50 mm/min
- Different box configurations are defined:

	Plastic boxes	Wire contact	Fuses & Relays	BIM
Configuration A	X			
Configuration B	X	X		
Configuration C	X	X	X	
Configuration D	X	X	X	X

- The combinations below are used for some tests.



GENERAL INSPECTION				
	Test description	Ref. RSA For indication	Procedure	Requirement
BOX ERFB				
V1	Visual inspection	36-05-019 /--G § 6.1	Shall be performed with the naked eye.	No working damage No visible damage, cracking or defect.
MECHANICAL TESTS				
	Test description	Ref. RSA For indication	Procedure	Requirement
BOX ERFB				
M1	Insertion force of the ERFB BOX 7 High current fuses on the BIM	36-05-219 /--C § 7.2.4.1	→ ERFB BOX 7 High current fuses in configuration A (see appendix 9)	▪ F < 60N
M2	Removal force of the ERFB BOX 7 High current fuses on the BIM	36-05-219 /--C § 7.2.4.1	→ ERFB BOX 7 High current fuses in configuration A (see appendix 9)	▪ F ≤ 60 N
M3	Retention force of the ERFB BOX 7 High current fuses on the BIM	36-05-219 /--C § 7.2.4.1	→ ERFB BOX 7 High current fuses in configuration A (see appendix 9)	▪ F ≥ 100 N
M4	Insertion force of the CRFB BOX 3 on the BIM	36-05-219 /--C § 7.2.4.1	→ CRFB Box 3 in configuration A (see appendix 9)	▪ F < 60N
M5	Removal force of the CRFB BOX 3 on the BIM	36-05-219 /--C § 7.2.4.1	→ CRFB Box 3 in configuration A (see appendix 9)	▪ F ≤ 60 N
M6	Retention force of the CRFB BOX 3 on the BIM	36-05-219 /--C § 7.2.4.1	→ CRFB Box 3 in configuration A (see appendix 9)	▪ F ≥ 120 N
M7	Insertion force of the μ-Relays Holder into the BIM	36-05-219 /--C § 7.2.4.1	→ μ-Relays Holder in configuration A (see appendix 9)	▪ F < 60N
M8	Removal force of the μ-Relays Holder into the BIM	36-05-219 /--C § 7.2.4.1	→ μ-Relays Holder in configuration A (see appendix 9)	▪ F ≤ 60 N
M9	Retention force of the μ-Relays Holder into the BIM	36-05-219 /--C § 7.2.4.1	→ μ-Relays Holder in configuration A (see appendix 9)	▪ F > 90N
M10	Insertion force of Relay ISO 70A holder into the BIM	36-05-219 /--C § 7.2.4.1	→ Relays holders 70A in the configuration A (see appendix 9)	▪ F < 60N
M11	Removal force of Relay ISO 70A holder into the BIM	36-05-219 /--C § 7.2.4.1	→ Relays holders in the configuration A (see appendix 9)	▪ F ≤ 60 N
M12	Retention force of Relay ISO 70A holder into the BIM	36-05-219 /--C § 7.2.4.1	→ Relays holders in the configuration A (see appendix 9)	▪ F > 100N
M13	Shock impact test	36-05-219 /--C § 7.3.1 36-05-019 /--G § 6.21	→ ERFB box 7 High current fuses in configuration C Impact hammer weight: 300gr Falling height: 100 mm Striker described in NF R 13-415 Impact zone see appendix 9	▪ Visual examination: ▪ No break, cracking nor deformation

M14	Drop resistance	36-05-019 /--G § 6.22	➔ERFB box 7 High current fuses in configuration A and C 1m free fall test, on each face, on concrete floor. Test temperature: 0 °C	No incipient rupture but unconcealed damage permissible Whereas 36-05-019/--G No damage or incipient rupture shall be observed.
M15	Insertion force of Relay ISO 40A holder into BIM	36-05-219 /--C § 7.2.4.1	➔ Relays holders in the configuration A (see appendix 9)	▪ F < 60N
M16	Removal force of Relay ISO 40A holder into the BIM	36-05-219 /--C § 7.2.4.1	➔ Relays holders in the configuration A (see appendix 9)	▪ F ≤ 60 N
M17	Retention force of Relay ISO 40A holder into the BIM	36-05-219 /--C § 7.2.4.1	➔ Relays holders in the configuration A (see appendix 9)	▪ F > 100N
CONTACTS				
M21	Terminal insertion See §2.7	36-05-219 /--C § 7.2.4.5 36-05-019 /--G § 5.3.4	➔ ERFB box 7 High current fuses configuration A Two insertion force measurement possible: · 1) Validation performed on a machine with a mobile jaw displacement speed of 50 mm/min ± 5 mm/min. · 2) The connector, installed on the measurement fixture, is manually loaded. The force is recorded at each insertion.	▪ Clip JPT 2.8 ≤ 10 N Whereas 36-05-019/--G: ≤ 8 N ▪ Clip JPT 2.8 ≤ 20 N on busbar ▪ Clip SPT 4.8 ≤ 15 N Whereas 36-05-019/--G: ≤ 12 N ▪ 8mm MaxiFuse ≤ 20 N
M22	Terminal retention force See §2.7	36-05-219 /--C § 7.2.4.5 36-05-019 /--G § 5.3.5	➔ ERFB box 7 High current fuses configuration A The same measurement technique is used as the method described in M21 "terminal insertion". Under no circumstances must the mechanical strength of the wire be used as a reference.	▪ Clip JPT 2.8 > 120 N ▪ Clip JPT 2.8 > 100 N on busbar ▪ Clip SPT 4.8 > 120 N Whereas 36-05-019/--G: >150 N ▪ 8mm MaxiFuse > 150 N Whereas 36-05-019/--G: >200 N After the ageing tests: Clip JPT 2.8 > 72 N Clip SPT 4.8 > 72 N 8mm MaxiFuse > 90 N
M23	Busbar retention into the ERFB Box 7 High current fuses	Specific test	➔ ERFB Box 7 High current fuses in the configuration A	F>110N
M24	Busbar Retention into the ERFB Box 5 High current fuses	Specific test	➔ ERFB Box 5 High current fuses in the configuration A	F>110N
M25	Busbar Retention into the ERFB Box 3 High current fuses	Specific test	➔ ERFB Box 3 High current fuses in the configuration A	F>110N
M39	Busbar Retention into the ERFB Box 4 High current fuses	Specific test	➔ ERFB Box 4 High current fuses in the configuration A	F>110N

M26	Other terminal insertion force See §2.8	36-05-219 /--C § 7.2.4.5 36-05-019 /--G § 5.3.4	ERFB Box 3 High current fuses in configuration A Two insertion force measurement possible: 1) Validation performed on a machine with a mobile jaw displacement speed of 50 mm/min $\pm$ 5 mm/min. 2) The connector, installed on the measurement fixture, is manually loaded. The force is recorded at each insertion.	- Clip $2.8 \leq 10$ N Cavity SBB : must not be performed Whereas 36-05-019/--G: ≤ 8 N - Clip $4.8 \leq 15$ N Whereas 36-05-019/--G: ≤ 12 N
M27	Other terminal retention force See §2.8	36-05-219 /--C § 7.2.4.5 36-05-019 /--G § 5.3.5	ERFB Box 3 High current fuses in configuration A The same measurement technique is used as the method described in M21 "terminal insertion". Under no circumstances must the mechanical strength of the wire be used as a reference.	- Clip $2.8 > 100$ N Cavity SBB : must not be performed - Clip $4.8 > 100$ N Whereas 36-05-019/--G: > 150 N
FUSES & RELAYS				
M31	Fuse insertion force	36-05-219 /--C § 7.2.4.2	→ ERFB box 7 High current fuses configuration B	Fuse insertion force : - Miniature fuse : $F < 40$ N Whereas 36-05-219/--C: < 30 N - Medium fuse : $F < 55$ N Whereas 36-05-219/--C: < 45 N - High current fuse: $F < 95$ N Whereas 36-05-219/--C: < 45 N
M32	Fuse extraction force	36-05-219 /--C § 7.2.4.2	→ ERFB box 7 High current fuses configuration B	Fuse extraction force: - Miniature fuse: $7N \leq F \leq 40N$ Whereas 36-05-219 / --C: $10N \leq F \leq 40N$ - Medium fuse : $10N \leq F \leq 50N$ Whereas 36-05-219/--C: $20N \leq F \leq 50N$ - High current fuse: $30N \leq F \leq 100N$
M33	Diode insertion force	36-05-219 /--C § 7.2.4.2	→ CRFB Box 3 Configuration B	Diode insertion force : Diode : $F < 40$ N Whereas 36-05-219/--C: < 30 N
M34	Diode extraction force	36-05-219 /--C § 7.2.4.2	→ CRFB Box 3 Configuration B	Diode extraction force: Diode: $7N \leq F \leq 40N$
M35	Relays insertion force	36-05-219 /--C § 7.2.4.2	→ ERFB box 7 High current fuses configuration B	Relay insertion force : Micro: $F \leq 85$ N
M36	Relays uncoupling force	36-05-219 /--C § 7.2.4.2	→ ERFB box 7 High current fuses configuration B	Relay uncoupling force : Micro: $30 \leq F \leq 115$ N

M37	Durability insertion and uncoupling components	36-05-219 /--C § 7.2.4.4	➔ ERFB box 7 High current fuses configuration B Mount and remove each fuse and relay 10 times. - With 50% of the samples with the same component - With 50% of the samples with new component for each operations Record the first and the tenth: ▪ Mounting and removing forces ▪ Contact resistances	▪ Component insertion force (see M31, M33 & M35) or/and the decrease must be lower than 10% of the 1st operation ▪ Component removing force (see M32, M34 & M36) or/and the decrease must be lower than 10% of the 1st operation ▪ Contact resistance Maxi (see E1) Whereas 36-05-219/--C Between the first to the tenth manipulation no variation of the strength and of the contact resistance of more than 10%
M38	Protection of the contacts during the working and the handling	36-05-219 /--C § 6.4.4	➔ ERFB box 7 High current fuses configuration B Mount and remove each fuse and relay 5 times in worst opposite combination clip/component. Record before the and after the test: ▪ Contact resistances ▪ Component removing forces	▪ Contact resistance Maxi (see E1) ▪ Component removing force: the decrease must be lower than 20% of the 1st operation
M40	Relays retention force (for information)	36-05-219 /--C § 7.2.4.2	➔ ERFB in configuration B only for PN 1802254-1	Relay retention force: ▪ Micro: F > 50N

ELECTRICAL TESTS

	Test description	Ref. RSA For indication	Procedure	Requirement
E1	Contact resistance	36-05-219 /--C § 7.2.2 36-05-019 /--G § 6.2	➔ ERFB Box 7 High current fuses, CRFB Box 3 and relays holders. Configuration C “MilliVolts” level method: - Test voltage : 20 mV - Test current : 50 mA	Initial contact resistance: - Miniature & Medium Fuses $\leq 6 \text{ m}\Omega$ - High current fuses $\leq 4 \text{ m}\Omega$ - Relays μ & 40A $\leq 6 \text{ m}\Omega$ (see appendix 6) - JPT 2.8 $\leq 3 \text{ m}\Omega$ - SPT 4.8 $\leq 3 \text{ m}\Omega$ 8mm MaxiFuse $\leq 1 \text{ m}\Omega$ After the ageing tests: - Miniature & Medium Fuses $\Delta R_c \leq 8 \text{ m}\Omega$ - Relays μ & 40A $\Delta R_c \leq 6 \text{ m}\Omega$ - High current fuses $\Delta R_c \leq 4 \text{ m}\Omega$ (see appendix 6) - JPT 2.8 $\Delta R_c \leq 4 \text{ m}\Omega$ - SPT 4.8 $\Delta R_c \leq 3 \text{ m}\Omega$ 8mm MaxiFuse + $\Delta R_c \leq 1 \text{ m}\Omega$
E2	Insulation resistance	36-05-219 /--C § 7.7 36-05-019 /--G § 6.11	ERFB Box 7 High current fuses, Configuration B Measures must be performed between each contacts and between each contacts connected together and a metal sheet covering the housing Voltage test : 500V dc / 1 min	$R_i \geq 100 \text{ M}\Omega$
E3	Voltage resistance	36-05-219 /--C § 7.6 36-05-019 /--G § 6.12	ERFB Box 7 High current fuses, Configuration B 1 000 Vac eff. 50 Hz or 60 Hz (or 1400 Vcc) / 1 min between each contacts and between each contacts connected together and a metal sheet covering the housing	No dielectric breakdown or flash-over during the test. Contacts must be without damage, oxide trace, or all other defect Housing must be without damage
E4	Fuse blowing test	36-05-219 /--C § 7.11	ERFB Box 7 High current fuses Configuration C A test shall be conducted to ensure that the box is capable of resisting constraints associated with the utilization of fuses under limit conditions. The test is performed at ambient temperature.	<u>First test:</u> The box is equipped with a « Miniature » 30 A fuse. No deformation shall appear following passage of a 36 A current during 1800s between 600s and 1800s and a 60A current between 0,15s and 5s. <u>Second test:</u> The box is equipped with a « Medium » 40 A fuse. No deformation shall appear following passage of a 48 A current between 600s and 1800s and 80A between 0,15s and 5s <u>Third test:</u> The box is equipped with a « High current » 80 A fuse. No deformation shall appear following passage of a 108 A current between 60s and 1800s and a 160A current between 4s and 60s.

THERMALELECTRICAL TESTS

	Test description	Ref. RSA For indication	Procedure	Requirement
T1	Current cycling at high temperature	36-05-219 /--C § 7.4 36-05-019 /--G § 6.15	➔ Boxes in configuration D Assy In an oven at 85°C, the box is powered: ▪ 500 cycles of scenario at 85°C (see appendix 3) (see appendix 10 for program approval test for ERFB BOX 4 HIGH CURRENT FUSES) 1 cycle: ▪ 45 min box powered ▪ 15 min box not powered	▪ Contact resistance (see E1)
T2	Temperature rise: fuses, relays, busbars	36-05-219 /--C § 7.2.3.1 § 7.2.3.2 § 7.2.3.3	➔ Boxes in configuration D Assy Boxes are placed in an oven protected from forced convection. The different loads described in appendix 3 and 4 (Appendix 10 for ERFB 4 High current fuses) are applied during 30min each (until the thermal stability). Reliability test (for indication purpose only): After the storage at T=85°C, the temperature is increased by step of 10°C with stabilisation during 30min until a first defect (fuse blowing, relay break...).	▪ Contact temperature: ▪ Clip JPT 2.8 ≤ 130°C ▪ Clip SPT 4.8 ≤ 130°C ▪ Busbar ≤ 130°C ▪ Clip 8mm Maxifuse +≤ 150°C Whereas 36-05-219/--C < 125°C
T3	Current cycling at high temperature (For information)	36-05-219 /--C § 7.4 36-05-019 /--G § 6.15	➔ Boxes in configuration D Assy In an oven at 85°C, the box is powered: ▪ 500 cycles of scenario at 85°C (see appendix 5) 1 cycle: ▪ 45 min box powered ▪ 15 min box not powered	For information

AGEING TESTS				
	Test description	Ref. RSA For indication	Procedure	Requirement
A1	Atmospheric corrosion test	36-05-219 /--C § 7.5.1 36-05-019 /--G § 6.7	➔ ERFB Box 7 High current fuses, CRFB Box 3 and relays holders configuration D. Method regarding CEI 68-2-60 with - Preconditioning : 1 H - Method : C - Duration : 4 h	Contact resistance (see E1)
A2	Vibrations	36-05-219 /--C § 7.3.2 36-05-019 /--E § 6.6	➔ Boxes in configuration D Assy Vibration: Class 1 see appendix 7 Only on vertical axis	- During sequence : No breakdown above 1µs - Contact resistance (see E1) - For information: Perform the test 36-05-019/--G
A3	Temperature humidity cycle	36-05-219 /--C § 7.5.2 36-05-019 /--G § 6.16	➔ Boxes in configuration C Assy - Box not powered 10 cycles of 24 Hrs. Cycles described in appendix 8 Tmax=125°C Whereas 36-05-219/--C Tmax=150°C	- Visual examination - Contact resistance ((see E1) - Withstanding voltage - Insulation resistance
A4	Thermal shocks	36-05-219 /--C § 7.5.3 36-05-019 /--G § 6.17	➔ Boxes in configuration D Assy - Box not powered 100 cycles (1 cycle : 1H/-40°C + 1H/+125°C) - transient time < 15s	- Visual examination - Contact resistance (see E1)
A5	Climatic endurance	36-05-219 /--C § 7.5.4 36-05-019 /--G § 6.19	➔ Boxes in configuration D Assy - Box not powered 240 Hrs at 125°C Whereas 36-05-219/--C 240 Hrs at 150°C	- No visible deformation nor crack - Contact resistance (see E1)
A6	Climatic endurance (For information)	36-05-019 /--G § 6.19	➔ Relays Holders in configuration B - Holder not powered 240 Hrs at 150°C	No visible deformation nor crack
A7	Nissan Climatic endurance (for information)	36-05-019 /--G § 6.19	➔ Box in configuration B - Holder not powered 120 Hrs at 120°C	No visible deformation nor crack

OTHER TESTS				
	Test description	Ref. RSA	Procedure	Requirement
O1	Speed of combustibility	36-05-219 /--C § 7.9.1	Test on standard material sample According test method D45 1333	Classe E Combustibility rate < 100mm/min Whereas 36-05-219/--C < 50mm/min
O2	Glow wire test Essai doigt chauffant	36-05-219 /--C § 7.9.2	→ ERFB Box 7 High current fuses Test method D45 1730 with Wire temperature 750°C ± 10°C Duration of incandescent wire application is 30 s ± 1s	No presence of a flame shall be observed 30 seconds after the incandescent wire has been moved away.
O3	Resistance to fluids	36-05-019 /--G § 6.18	→ ERFB Box 7 High current fuses, CRFB Box 3 and relays holders in configuration A The tests are performed in accordance with Test Method D47 1924. Test with the following fluids: Engine oil Battery electrolyte Mechanical gearbox oil Coolants Brake fluid Fuels "Severely cold" windscreen Washing fluid	At the end of the test, the parts tested must meet the following test requirements: - No deformation or cracks shall be observed. - Voltage resistance. - Terminal resistance variation, ΔRc,

6. QUALITY INSURANCE MEASURE

6.1. Qualification test

Samples must be in accordance with drawings and be taken in a random way in the production in progress.

6.2. Program approval tests

In the groups defined below, the boxes undergo all the tests in the chronological order of the figure

PLAN QUALIFICATION SERIE BOITES BFRM

N° Sequence	RSA Sequence (36-05-219)	Number of parts requested in 36-05-219	Individual Components number					Configuration D	
			ERFB 7 Maxifuse	BFRH BOX 3	Relay Holder ISO 40	Relay Holder ISO 70	Relay Holder μ-Relays	BIM (for information)	Assy Number of sample
1	C	10	8	NA	NA	NA	NA	4	NA
2	C	10	NA	4	NA	NA	NA	2	NA
3	C	10	NA	NA	NA	NA	8	4	NA
3 bis	C	10	NA	NA	8	NA	NA	4	NA
4	C	10	NA	NA	NA	8	NA	4	NA
5	I	5	8	NA	NA	NA	NA	0	NA
6			12	NA	NA	NA	NA	0	NA
7	C	10	4	NA	NA	NA	NA	0	NA
8			15	NA	NA	NA	NA	0	NA
9	C	10	4	NA	NA	NA	NA	0	NA
10	C	10	NA	4	NA	NA	NA	0	NA
11	C	10	10	NA	NA	NA	NA	0	NA

M1	→	36-05-219 § 7.2.4.1 Insertion force of the ERFB BOX 7 maxifuse on the BIM	→	M2	→	36-05-219 § 7.2.4.1 Removal force of the ERFB BOX 7 maxifuse on the BIM	→	M3	→	36-05-219 § 7.2.4.1 Retention force of the ERFB BOX 7 maxifuse on the BIM
M4	→	36-05-219 § 7.2.4.1 Insertion force of the CRFB BOX 3 on the BIM	→	M5	→	36-05-219 § 7.2.4.1 Removal force of the CRFB BOX 3 on the BIM	→	M6	→	36-05-219 § 7.2.4.1 Retention force of the CRFB BOX 3 on the BIM
M7	→	36-05-219 § 7.2.4.1 Insertion force of the μ-Relays Holder into the BIM	→	M8	→	36-05-219 § 7.2.4.1 Removal force of the μ-Relays Holder into the BIM	→	M9	→	Specific test Retention force of the μ-Relays Holder into the BIM
M15	→	36-05-219 § 7.2.4.1t Insertion force of Relay/ISO 40A holder into the BIM	→	M16	→	36-05-219 § 7.2.4.1 Removal force of Relay/ISO 40A holder into the BIM	→	M17	→	36-05-219 § 7.2.4.1 Retention force of Relay/ISO 40A holder into the BIM
M10	→	36-05-219 § 7.2.4.1t Insertion force of Relay/ISO 70A holder into the BIM	→	M11	→	36-05-219 § 7.2.4.1 Removal force of Relay/ISO 70A holder into the BIM	→	M12	→	36-05-219 § 7.2.4.1 Retention force of Relay/ISO 70A holder into the BIM
M13	→	36-05-019: 6.21 Shock impact	→	V1	→	36-05-019: 6.1 Visual inspection				
M14	→	36-05-019: 6.22 Drop test								
M21	→	36-05-019 § 5.3.4 Terminal insertion	→	M22	→	36-05-019 § 5.3.5 Terminal retention force				
M23	→	Specific test Busbar retention into the ERFB Box 7 Maxifuses	→	M24	→	Specific test Busbar Retention into the ERFB Box 5 Maxifuses	→	M25	→	Specific test Busbar Retention into the ERFB Box 3 Maxifuses
M31	→	36-05-219: 7.2.4.2 Fuses insertion force	→	M32	→	36-05-219: 7.2.4.2 Fuse extraction force				
M33	→	36-05-219: 7.2.4.2 Diode insertion force	→	M34	→	36-05-219: 7.2.4.2 Diode extraction force				
M35	→	36-05-219: 7.2.4.2 Relays insertion force	→	M36	→	36-05-219: 7.2.4.2 Relays uncoupling force				

PLAN QUALIFICATION SERIE BOITES BFRM

N° Sequence	RSA Sequence (36-05-219)	Number of parts requested in 36- 05-219	Individual Components number					Configuration D Assy	
			ERFB 7 Maxifuse	BFRH BOX 3	Relay Holder ISO 40	Relay Holder ISO 70	Relay Holder µ-Relays	BIM (for information)	Number of sample
12	H	3	2	NA	NA	NA	NA	0	NA
13	E	1	2	1	NA	NA	3	1	1
14	A	3	2	1	NA	NA	3	1	1
15	F	3	4	2	NA	NA	6	2	2
16	G	3	4	2	NA	NA	6	2	2
17	A	3	4	2	NA	NA	6	2	2
18	L	1	2	2	NA	NA	2		0
19	K	1	1	NA	NA	NA	NA	0	NA
20	B	3	4	2	NA	NA	6	2	2
21			2	NA	NA	NA	NA	0	NA
22	D	1	Plastic material certificate						
23	D	1	4	NA	NA	NA	NA	0	NA
24	A	3	2	1	NA	NA	3	1	1
25	A	3	2	1	NA	NA	3	1	1

36-05-219 : 7.2.4.4 Durability/insertion and uncoupling components	→ E1	36-05-019 : 6.2 Contact resistance	→ E1	36-05-019 : 6.11 Insulation resistance
36-05-019 : 6.7 Atmospheric corrosion	→ E1	36-05-019 : 6.2 Contact resistance	→ E1	36-05-019 : 6.12 Voltage resistance
36-05-019 : E : 6.6 Vibrations	→ E1	36-05-019 : 6.2 Contact resistance	→ E1	36-05-019 : 6.12 Voltage resistance
36-05-019 : 6.16 Temperature/humidity	→ V1	36-05-019 : 6.1 Visual inspection	→ V1	36-05-019 : 6.12 Voltage resistance
36-05-019 : 6.17 Thermal shock	→ V1	36-05-019 : 6.1 Visual inspection	→ V1	36-05-019 : 6.12 Voltage resistance
36-05-219 : 7.5.4 : 36-05-019 : 6.19 Climatic endurance	→ E1	36-05-019 : 6.2 Contact resistance	→ E1	36-05-019 : 6.12 Voltage resistance
36-05-019 : 6.18 Resistance to fluids	→ E1	36-05-019 : 6.2 Contact resistance	→ E1	36-05-019 : 6.12 Voltage resistance
36-05-219 : 7.2.4.2 Fuse extraction force	→ M25	36-05-019 : 6.2 Contact resistance	→ E1	36-05-019 : 6.12 Voltage resistance
36-05-219 : 7.2.3.1 ; 7.2.3.2 ; Heating measurement of components	→ T2	36-05-019 : 6.2 Contact resistance	→ E1	36-05-019 : 6.12 Voltage resistance
36-05-219 : 6.4.4 Protection of the contacts during the working and the handling	→ M38	36-05-219 : 7.2.2 : 36-05-019 : 6.2 Contact resistance	→ E1	36-05-019 : 6.12 Voltage resistance
36-05-019 : 5.3.5 Terminal retention force	→ M12	36-05-019 : 5.3.5 Terminal retention force	→ E1	36-05-019 : 5.3.5 Terminal retention force
36-05-219 : 7.4 : 36-05-019 : 6.15 Current cycling at high temperature (For information)	→ T1	36-05-219 : 7.2.2 : 36-05-019 : 6.2 Contact resistance	→ E1	36-05-019 : 6.12 Voltage resistance

6.3. Program approval tests for duplication tool of the main ERFB Holder in ERFB BOX 3/5/7 High Current Fuses:

6.3.1. Renault version

VALIDATION PLAN FOR ERFB DUPLICATION

N° Sequence	RSA Sequence (36-05-219)	Number of parts requested in 36- 05-219	Individual Components number				Configuration D Assy Number of sample
			ERFB 3 High current fuses	ERFB 5 High current fuses	ERFB 7 High current fuses	BIM (for information)	
1	C	10	8	NA	NA	4	NA
7	C	10	4	NA	NA	0	NA
8			5	5	5	0	NA
24	A	3	2	NA	NA	0	NA
26	C	10	4	NA	NA	0	NA

M1	→	36-05-219 § 7.2.4.1 Insertion force of the ERFB BOX on the BIM	→	M3	→	36-05-219 § 7.2.4.1 Retention force of the ERFB BOX on the BIM
M21	→	36-05-019 § 5.3.4 Terminal insertion	→	M22	→	36-05-019 § 5.3.5 Terminal retention force
M23	→	Specific test Busbar retention into the ERFB Box 7 High current fuses	→	M24	→	Specific test Busbar Retention into the ERFB Box 5 High current fuses
A6	→	36-05-019-G § 6.19 Climate endurance 150 °C (For information)	→	M12	→	36-05-019 § 5.3.5 Terminal retention force
M26	→	36-05-019 § 5.3.4 Terminal insertion with competitors (LEAR and FCI) contacts	→	M27	→	36-05-019 § 5.3.5 Terminal retention force with competitors (LEAR and FCI) contacts
				M25	→	Specific test Busbar Retention into the ERFB Box 3 High current fuses



Product Specification: ENGINE COMPARTMENT FUSE AND RELAY BOX ERFB AND RELAYS HOLDERS

108-15407
February 28th, 2020 – Rev. D

6.3.2. Nissan version

		Design Verification Plan and Report						DVP Number		Dept#		Engineering		
								Plan Date		DD-Month-Year		Plan Originator		
Component:		ERFB BOX				Customer P/N		TE P/N		1802254-1/-2		Manager		
Model Year		Applications		Sub-Assy		Carlines		Source		Report Date		Appv'l		
		FUSES AND RELAYS BOX CABIN		Assy				TE Connectivity		DD-Month-Year		Reporting Engineer		
TEST PLAN														
Item N°	Procedure, Technical Regulation or Standard	Test Description	Acceptance Criteria	Target / Requirements	Sample		Duration	Timing		Samples Tested			Actual Results	NOTES
					Qty	Type (configuration)		(YYWW)		Qty	Type	Phase		
								Start	Compl					
MECHANICAL TESTS														
Sequence 1														
1.1	36-05-219	M1: Insertion force of the ERFB on the BIM	\$7.2.4.1	F < 60N	8	A								
1.2	36-05-219	M2 : Removal force of the ERFB on the BIM	\$7.2.4.1	F ≤ 60N	4	A								
1.3	36-05-219	M3 : Retention force of the ERFB on the BIM	\$7.2.4.1	F ≥ 100N	4	A								
Sequence 2														
2.1	36-05-019	M13 : Shock impact	\$6.20	No break, cracking nor deformation	8	A								
2.2	36-05-019	V1 : Visual inspection	\$6.1	Any failure spotted during examination must be identified	8	A								
Sequence 3														
3.1	36-05-019	M14 : Drop test	\$6.21	No incipient rupture but unconcealed damage permissible	12	A & C								
Sequence 4														
4.1	36-05-019	M21 : Terminal insertion	\$5.3.4	Clip JPT 2,8 : ≤ 10N Clip JPT 2,8 on busbar : ≤ 20N Clip SPT 4,8 : ≤ 15N 8mm Maxifuse : ≤ 20N	4	A								
4.2	36-05-019	M22 : Terminal retention force	\$5.3.5	Clip JPT 2,8 : > 120N Clip JPT 2,8 on busbar : > 100N Clip SPT 4,8 : > 120N 8mm Maxifuse : > 150N	4	A								
Sequence 5														
5.1	Specific test	M25 : Busbar retention into the ERFB Box 3 Maxifuses		F > 110N	5	A								
Sequence 6														
6.1	36-05-219	M35 : Relays insertion force	\$7.2.4.2	F < 85N	8	B								
6.2	36-05-219	M36 : Relays uncoupling force	\$7.2.4.2	30N < F < 115N	4	B								
6.3	36-05-219	M40 : Relays retention force	\$7.2.4.2	F > 50N only for PN 1802254-1	4	B								
Sequence 7														
7.1	36-05-219	M31 : Fuse insertion force	\$7.2.4.2	> Miniature Fuse : F < 40N > Medium Fuse : F < 55N > High Current Fuse : F < 95N	2	B								
7.2	36-05-219	M32 : Fuse uncoupling force	\$7.2.4.2	> Miniature Fuse : 7N ≤ F ≤ 40N > Medium Fuse : 10N ≤ F ≤ 50N > High Current Fuse : 30N ≤ F ≤ 100N	2	B								
Sequence 8														
8.1	36-05-019	E1 : Contact resistance	\$6.2	Initial contact resistance : > Micro Relay : ≤ 6mΩ > JPT 2,8 : ≤ 3mΩ > SPT 4,8 : ≤ 3mΩ After ageing tests : > Micro Relay ΔRc ≤ 6mΩ > JPT 2,8 : ΔRc ≤ 4mΩ > SPT 4,8 : ΔRcs 3mΩ	3	C								
8.2	36-05-219	M37 : Durability insertion and uncoupling components (relay only)	\$7.2.4.4	> Component insertion force or/and the decrease must be lower than 10% of the 1st operation > Component removing force or/and the decrease must be lower than 10% of the 1st operation > Contact resistance maxi	3	B								
8.3	36-05-019	E1 : Contact resistance	\$6.2	Initial contact resistance : > Micro Relay : ≤ 6mΩ > JPT 2,8 : ≤ 3mΩ > SPT 4,8 : ≤ 3mΩ After ageing tests : > Micro Relay ΔRc ≤ 6mΩ > JPT 2,8 : ΔRc ≤ 4mΩ > SPT 4,8 : ΔRcs 3mΩ	3	C								
Sequence 9														
9.1	36-05-019	E1 : Contact resistance	\$6.2	Initial contact resistance : > Micro Relay : ≤ 6mΩ > JPT 2,8 : ≤ 3mΩ > SPT 4,8 : ≤ 3mΩ After ageing tests : > Micro Relay ΔRc ≤ 6mΩ > JPT 2,8 : ΔRc ≤ 4mΩ > SPT 4,8 : ΔRcs 3mΩ	2	C								
9.2	36-05-019 E	A2 : Vibration	\$6.9	No breakdown above 1μs	2	C								
9.3	36-05-019	E1 : Contact resistance	\$6.2	Initial contact resistance : > Micro Relay : ≤ 6mΩ > JPT 2,8 : ≤ 3mΩ > SPT 4,8 : ≤ 3mΩ After ageing tests : > Micro Relay ΔRc ≤ 6mΩ > JPT 2,8 : ΔRc ≤ 4mΩ > SPT 4,8 : ΔRcs 3mΩ	2	C								
Sequence 10														
10.1	36-05-019 G	A7 : Climatic endurance (for information) > Holder not powered > 120Hours at 120°C	\$6.19	No visible deformation nor cracks	10	B								
10.2	36-05-219	M36 : relays uncoupling force	\$7.2.4.2	30N < F < 115N	10	B								

6.4. Program approval tests for ERFB BOX 4 HIGH CURRENT FUSES.

PLAN QUALIFICATION SERIE BOITES ERFB BOX 4 High Current Fuses

Individual Components			Configuration D Assy	
Number of parts requested in 36-05-219		ERFB 4 High current fuses	Number of sample	
N° Sequence	RSA Sequence (36-05-219)			
7	C	10	10	NA
8			5	NA
9	C	10	4	NA
12	H	3	2	NA
17	A	3	2	NA
20	B	3	2	NA
24	A	3	2	NA

ERFB 4 Maxifuse		D assy	
27		0	
Total			

→	M21	36-05-019 § 5.3.4 Terminal insertion	→	M22	36-05-019 § 5.3.5 Terminal retention force
→	M39	Specific test Busbar retention into the ERFB Box 4 High current fuses	→	M32	36-05-219 : 7.2.4.2 Fuse extraction force
→	M31	36-05-219 : 7.2.4.2 Fuses insertion force	→	M37	36-05-219 : 7.2.4.4 Durability insertion and uncoupling components
→	E1	36-05-219: 7.2.2 36-05-019: 6.2 Contact resistance	→	T1	36-05-219: 7.4 36-05-019: 6.15 Current cycling at high temperature
→	E1	36-05-019: 6.2 Contact resistance	→	T2	36-05-219: 7.2.3.1; 7.2.3.2; 7.2.3.3 Heating measurement of components
→	A6	36-05-019:--G § 6.19 Climatic endurance 150°C [For information]	→	M12	36-05-019 § 5.3.5 Terminal retention force

→		→	
	36-05-019: 6.2 Contact resistance	→	36-05-019: 6.2 Contact resistance
		→	36-05-019: 6.2 Contact resistance

6.5. Program approval tests for CRFB BOX 3 V2 PN 1801773-1

VALIDATION PLAN FOR CRFB BOX 3 V2 INTO THE BIM

N° Sequence	RSA Sequence (36-05-219)	Number of parts requested in 36-05-219	BIM (for information)	Configuration D Assy
2	C	10	4	NA
14	A	3	1	NA

M4	→	36-05-219 § 7.2.4.1 Insertion force of the CRFB BOX 3 on the BIM	→	M5	→	36-05-219 § 7.2.4.1 Removal force of the CRFB BOX 3 on the BIM	→	M6	→	36-05-219 § 7.2.4.1 Retention force of the CRFB BOX 3 on the BIM
E1	→	36-05-019: 6.2 Contact resistance	→	A2	→	36-05-019 E: 6.6 Vibrations	→	E1	→	36-05-019: 6.2 Contact resistance



Product Specification:

ENGINE COMPARTMENT FUSE AND RELAY BOX ERFB AND RELAYS HOLDERS

108-15407

February 28th, 2020 – Rev. D

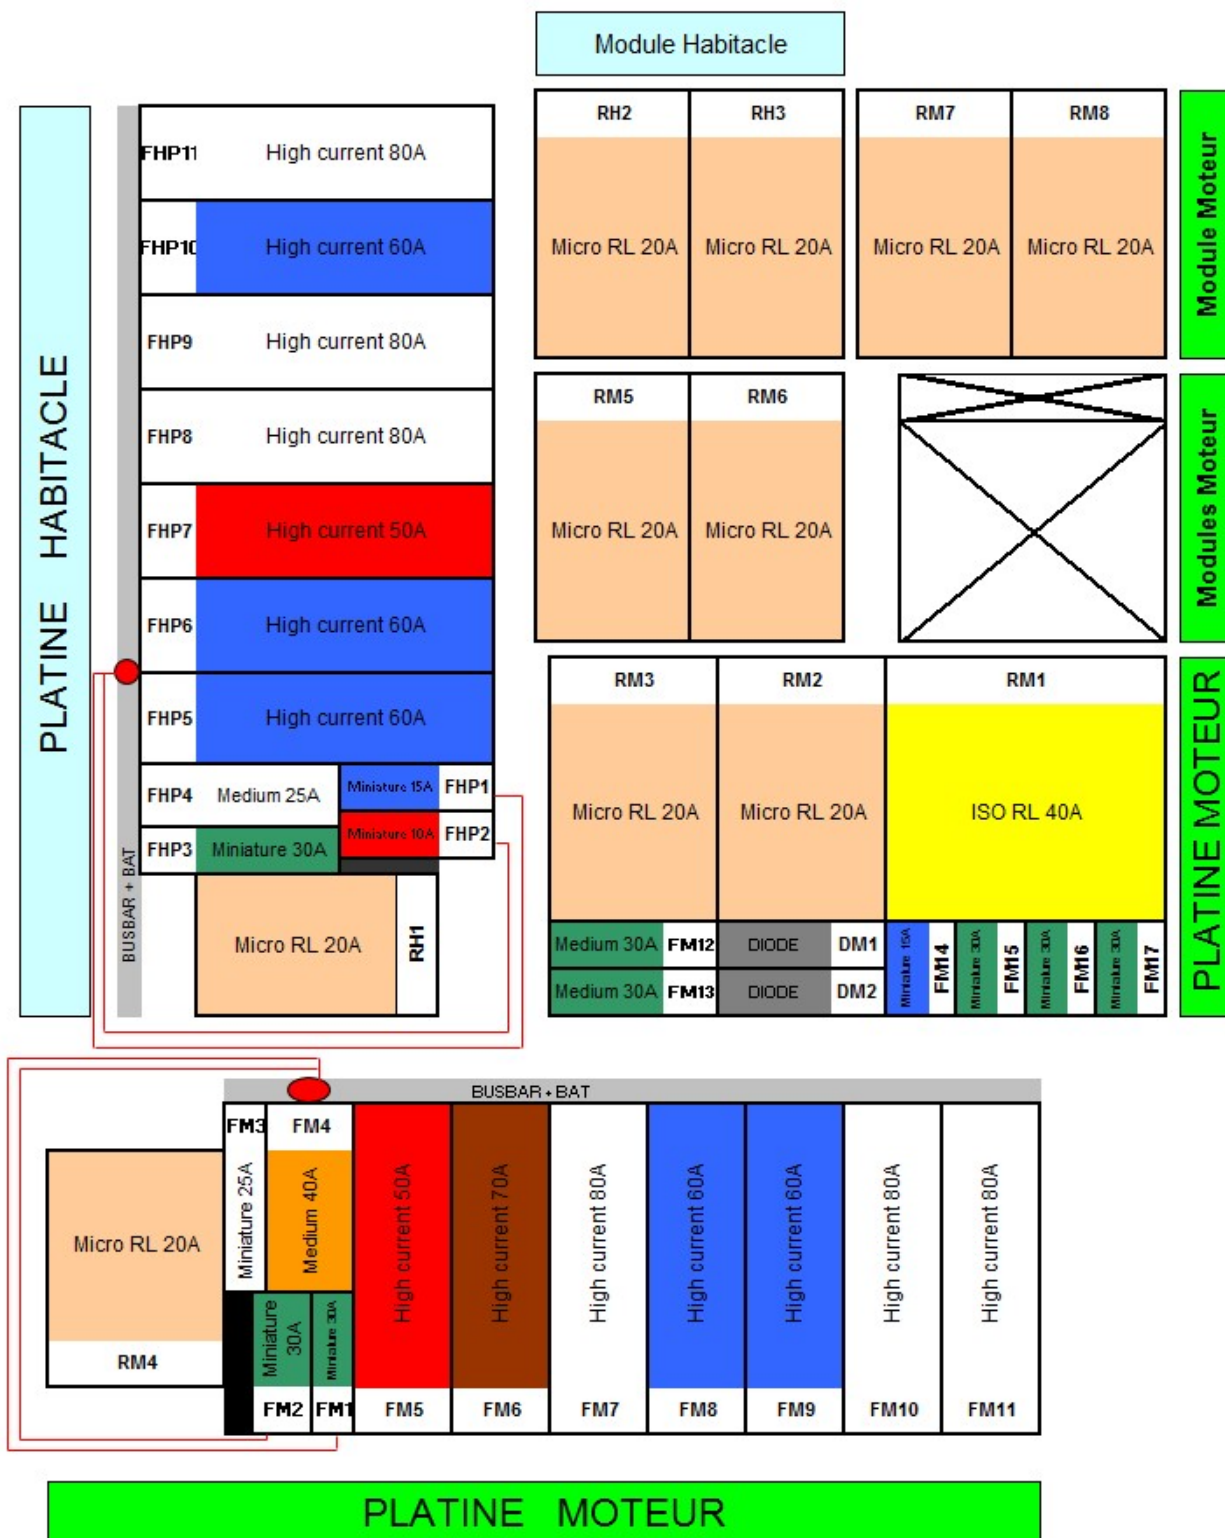
6.6. General conditions of test

Unless otherwise specified, the tests are conducted in the following conditions.
Minimum test samples quantity: 2 parts (1 by cavity)

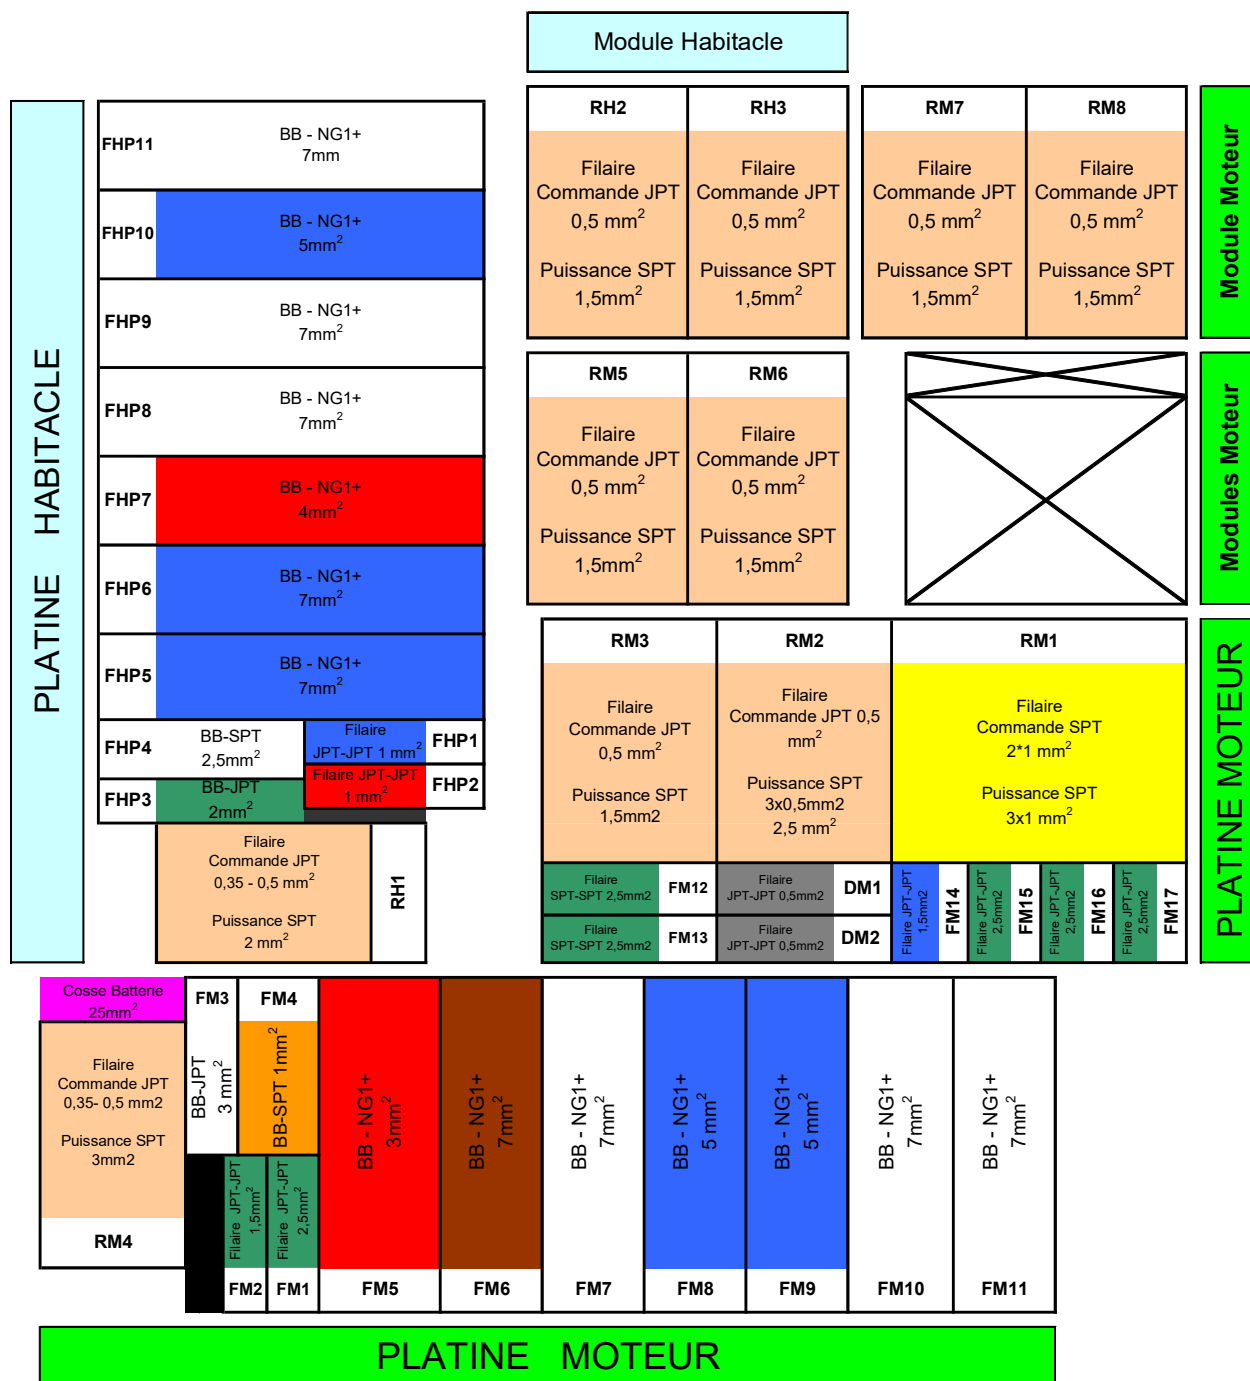
The table below gives the number of samples for a complete qualification.

6.7. Test and conformity

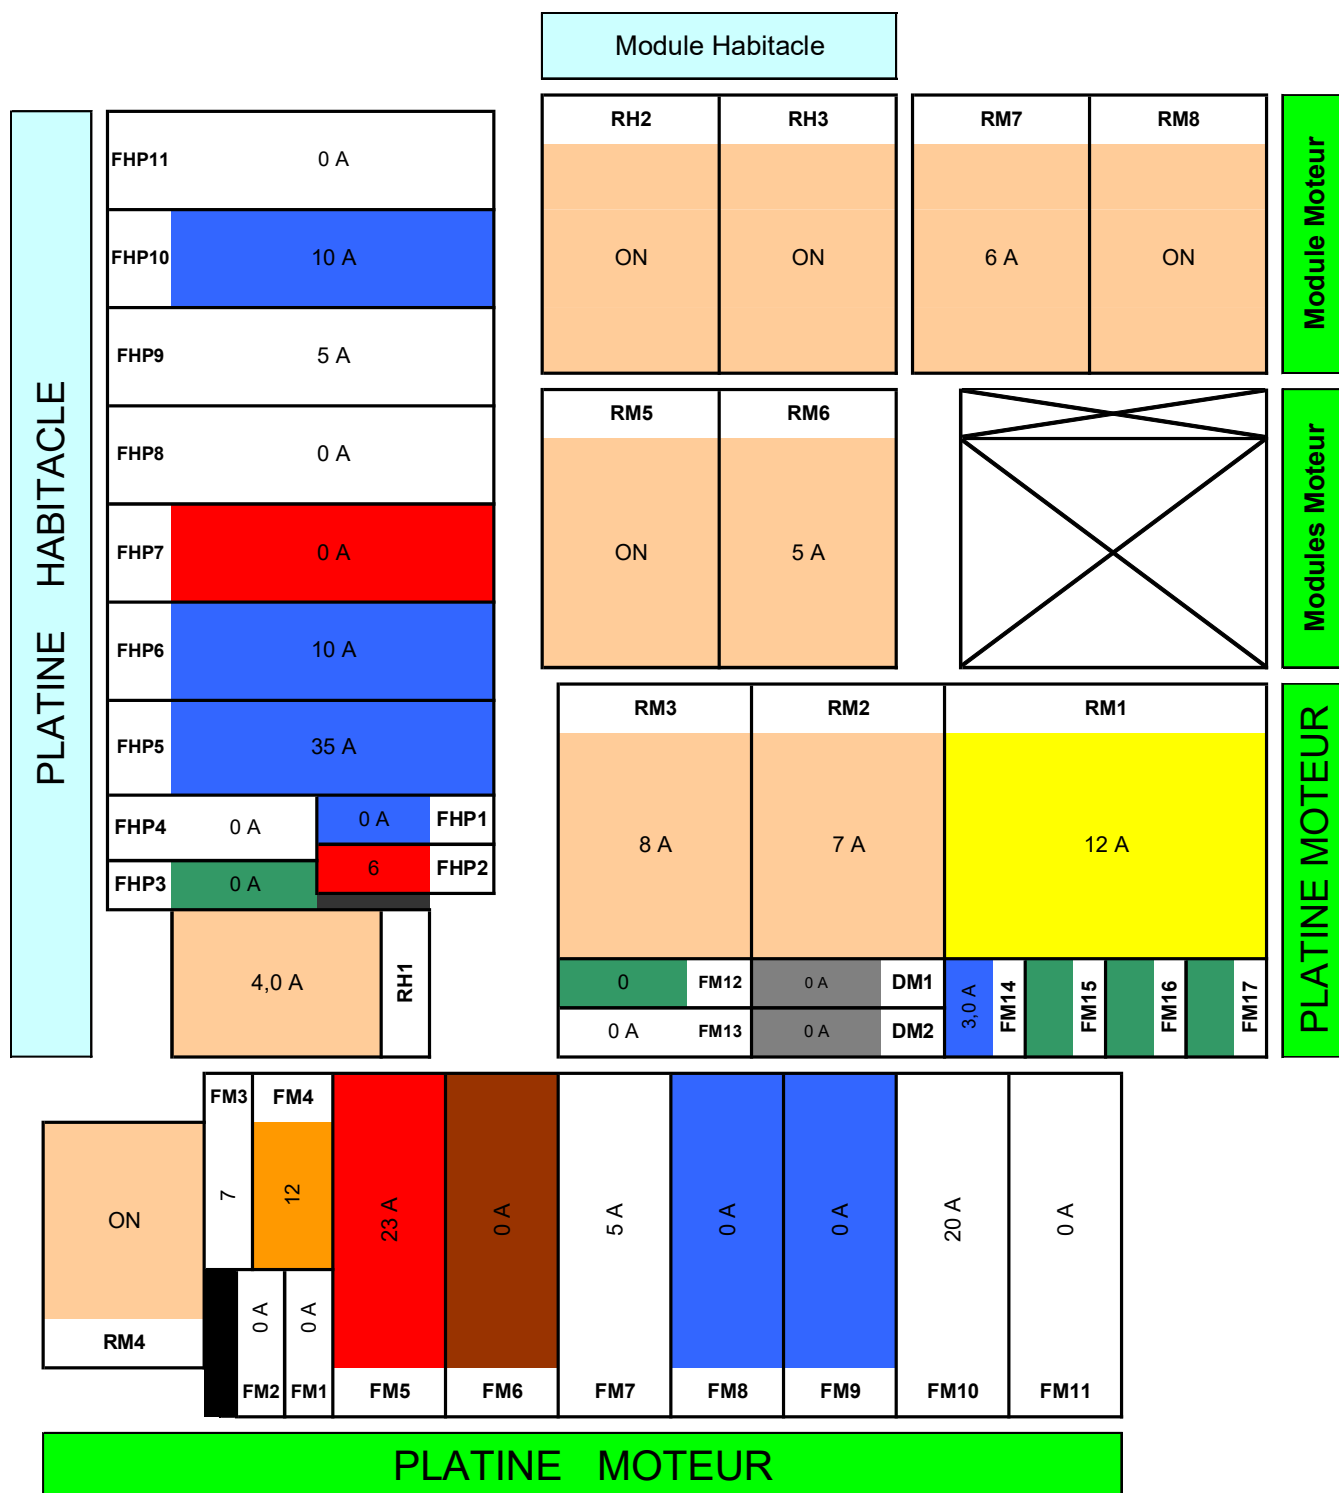
Conformity test is made regarding specific Tyco Electronics quality inspection plan which define acceptable quality limit based on number of samples.
Dimensional and functional requirement must meet production drawing and that specification.

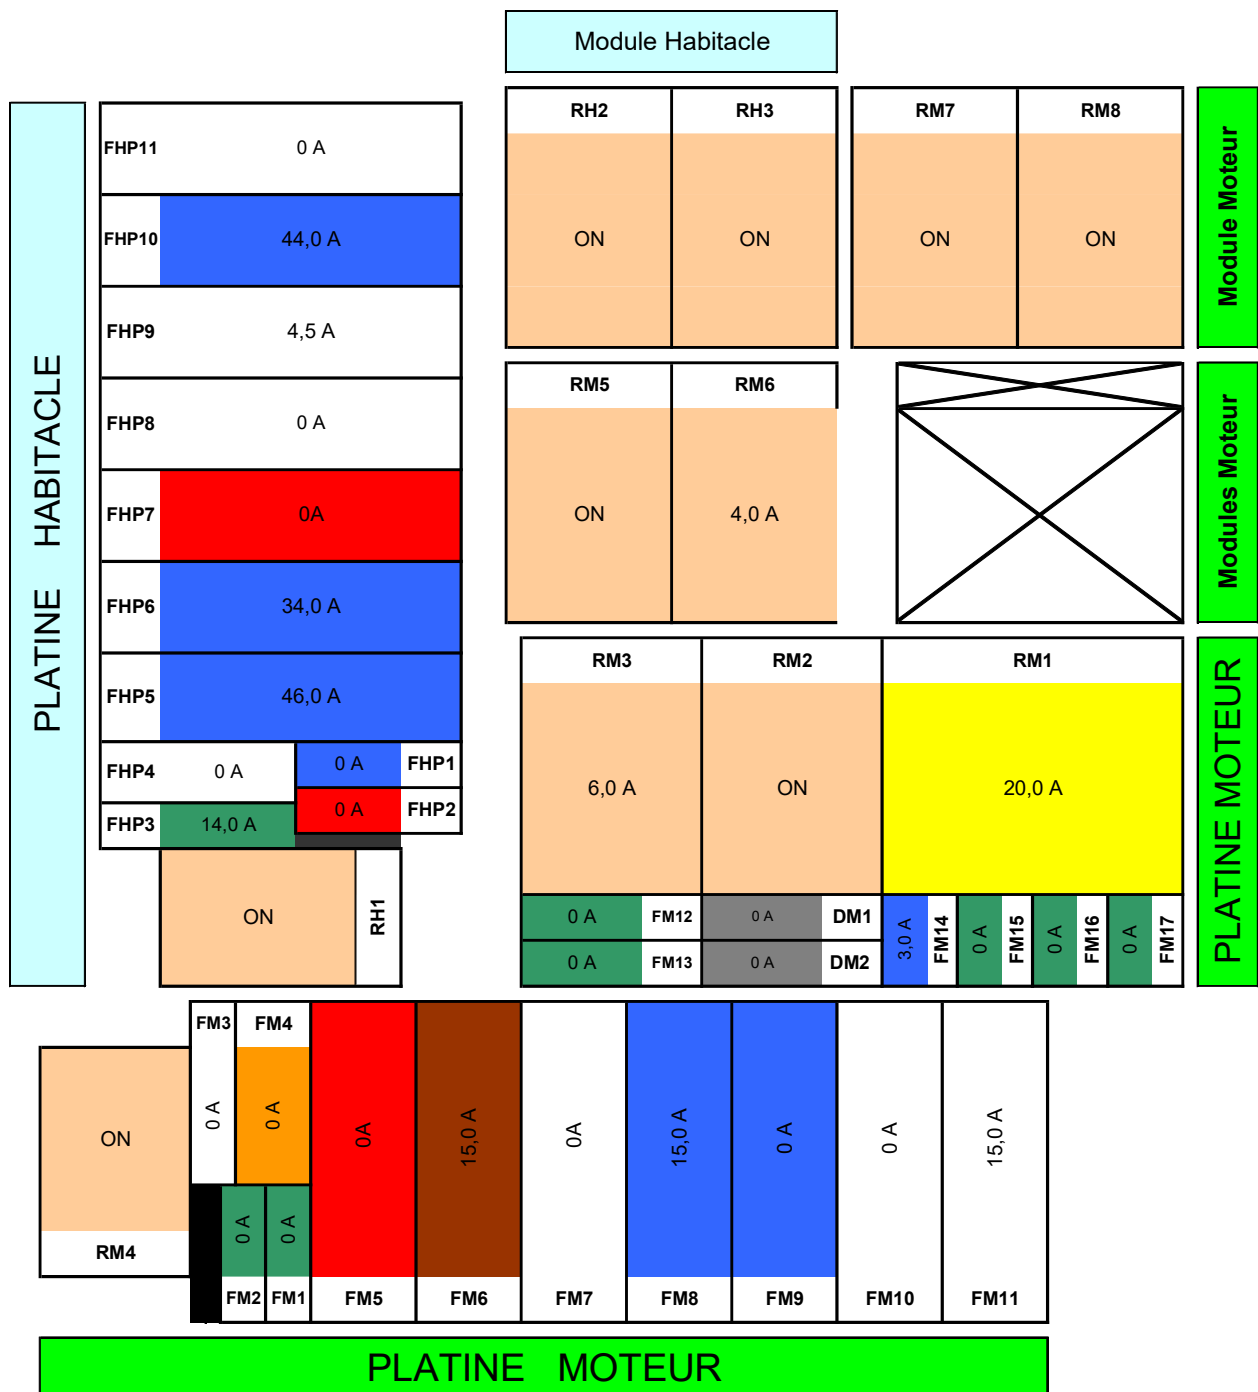
APPENDIX 1 : ELECTRICAL SYNOPTIC AND FUSE ARCHITECTURE


APPENDIX 2 : WIRING ARCHITECTURE



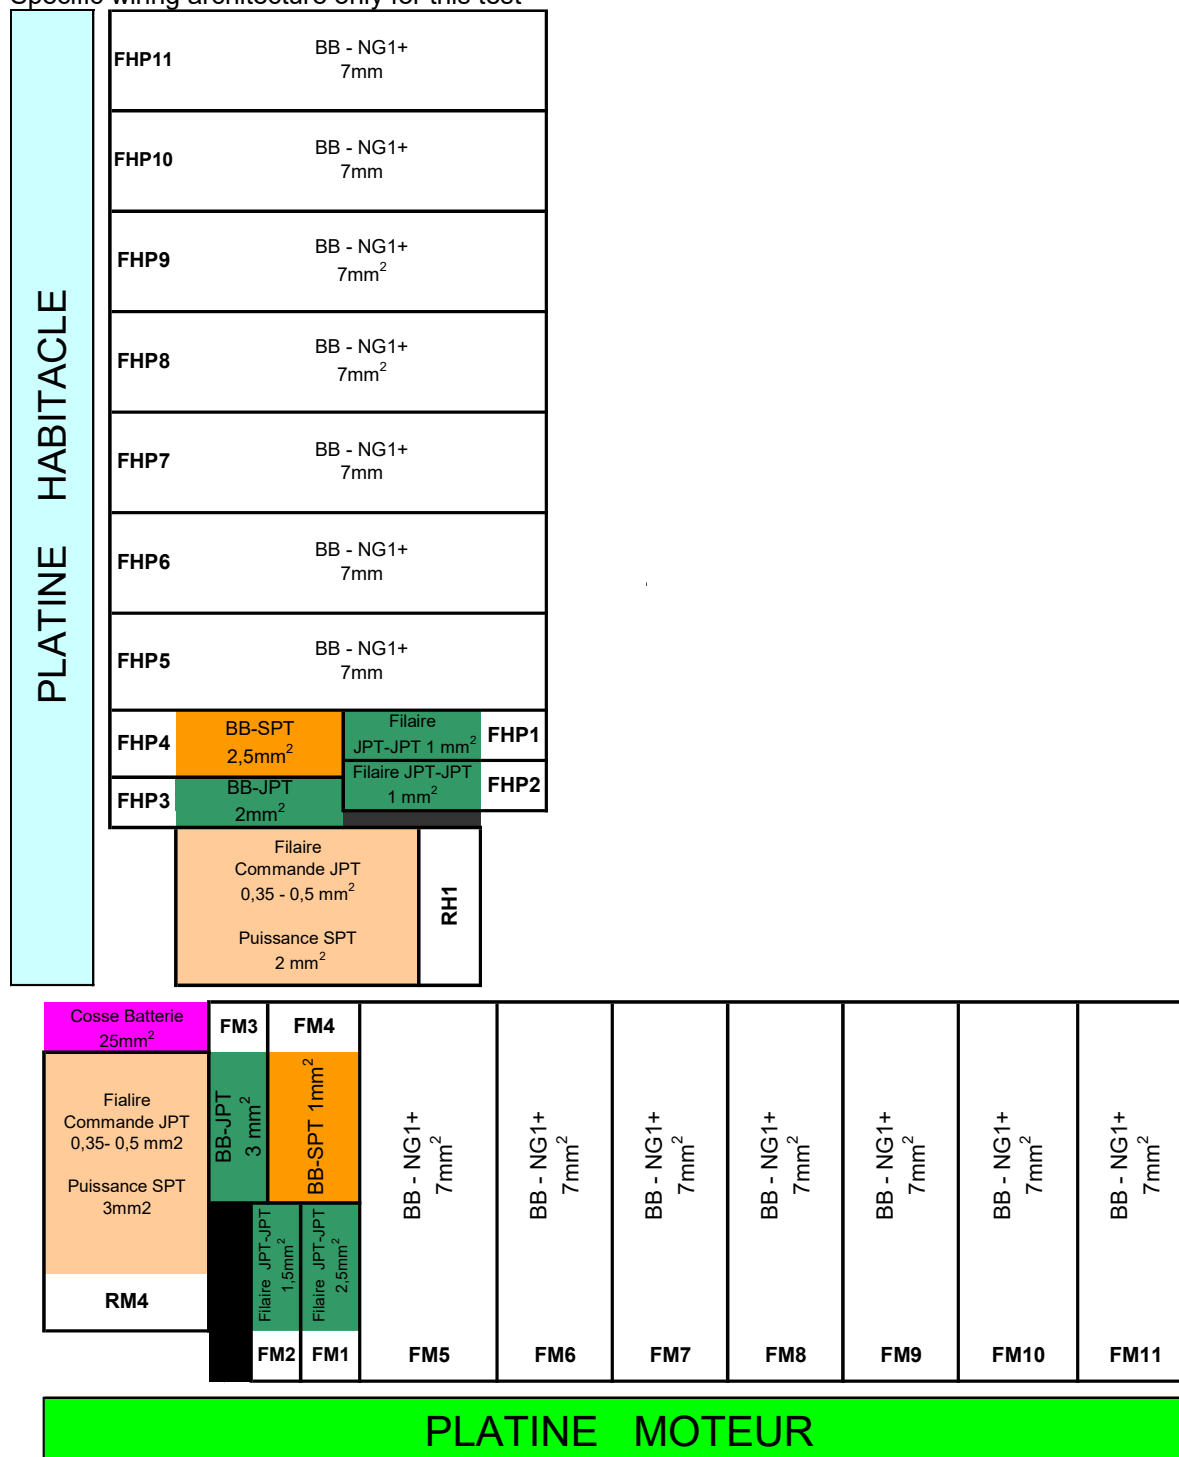
APPENDIX 3 : CURRENT LOAD SCENARIOS AT 85°C



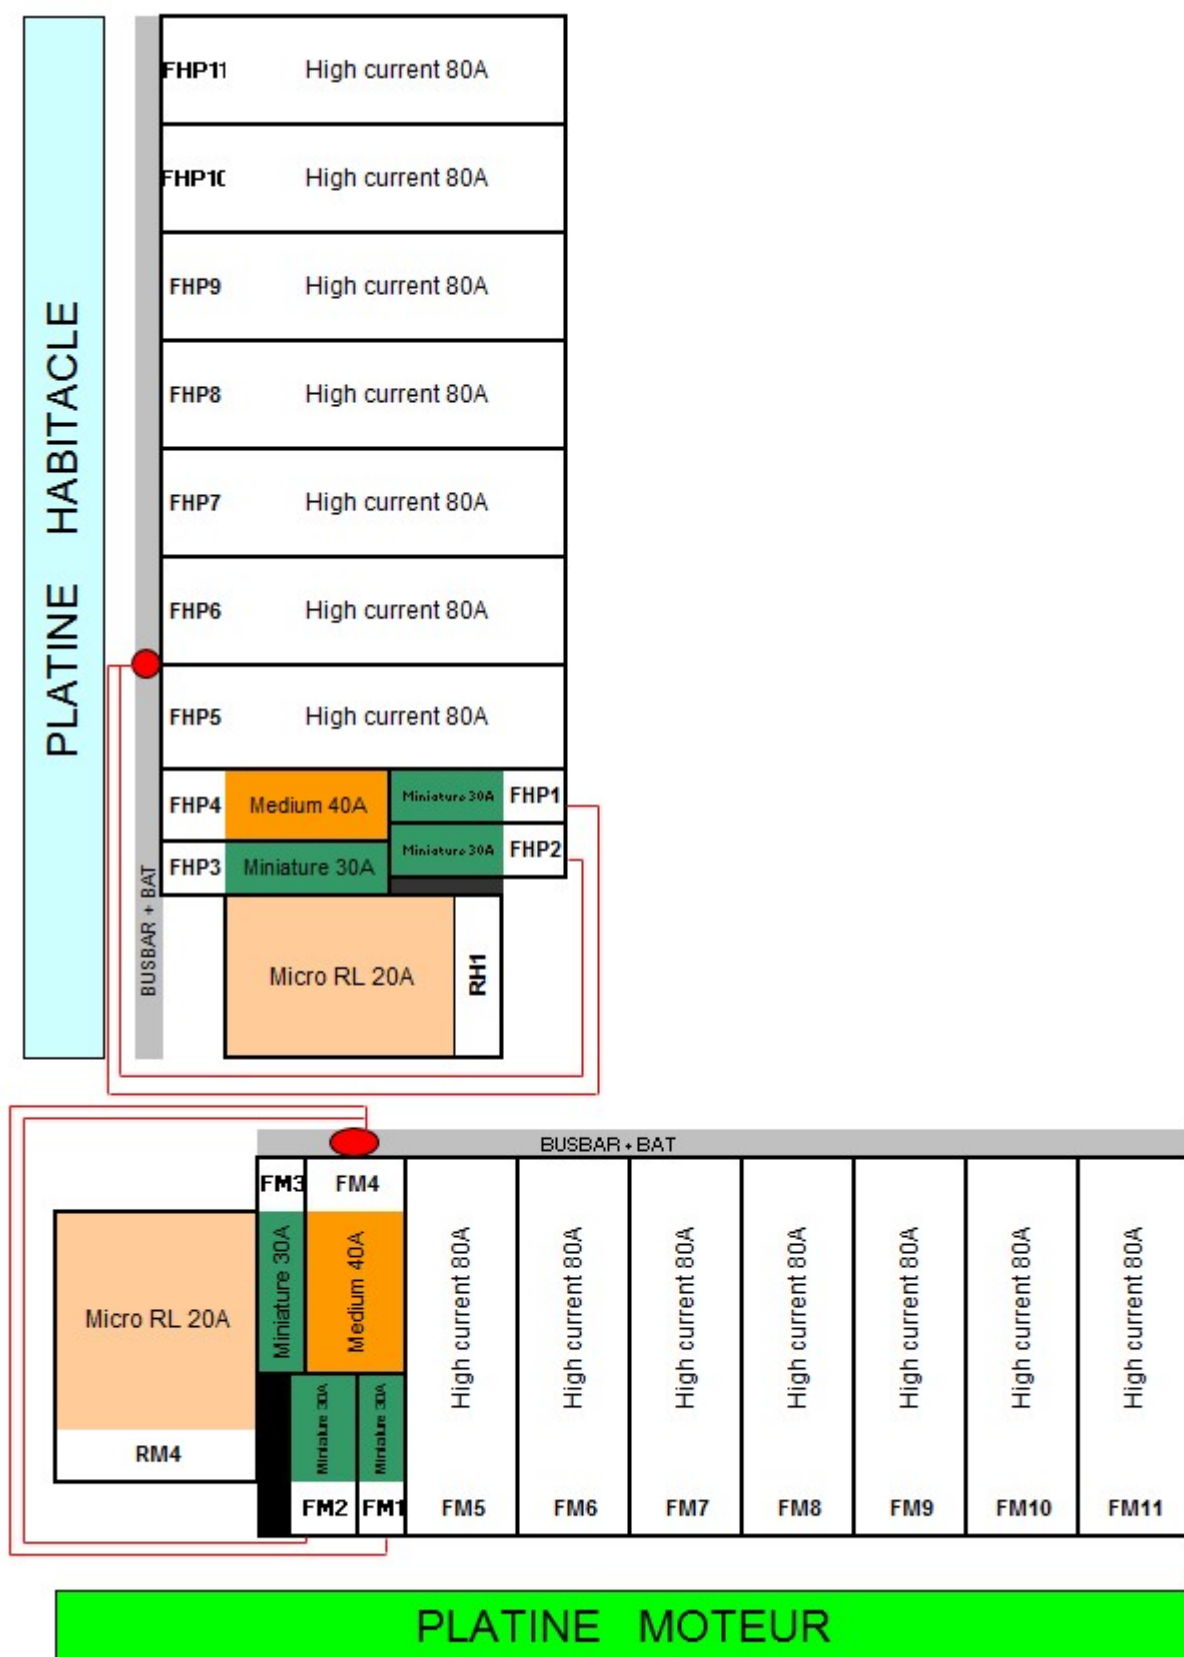
APPENDIX 4 : CURRENT LOAD SCENARIOS AT 40°C


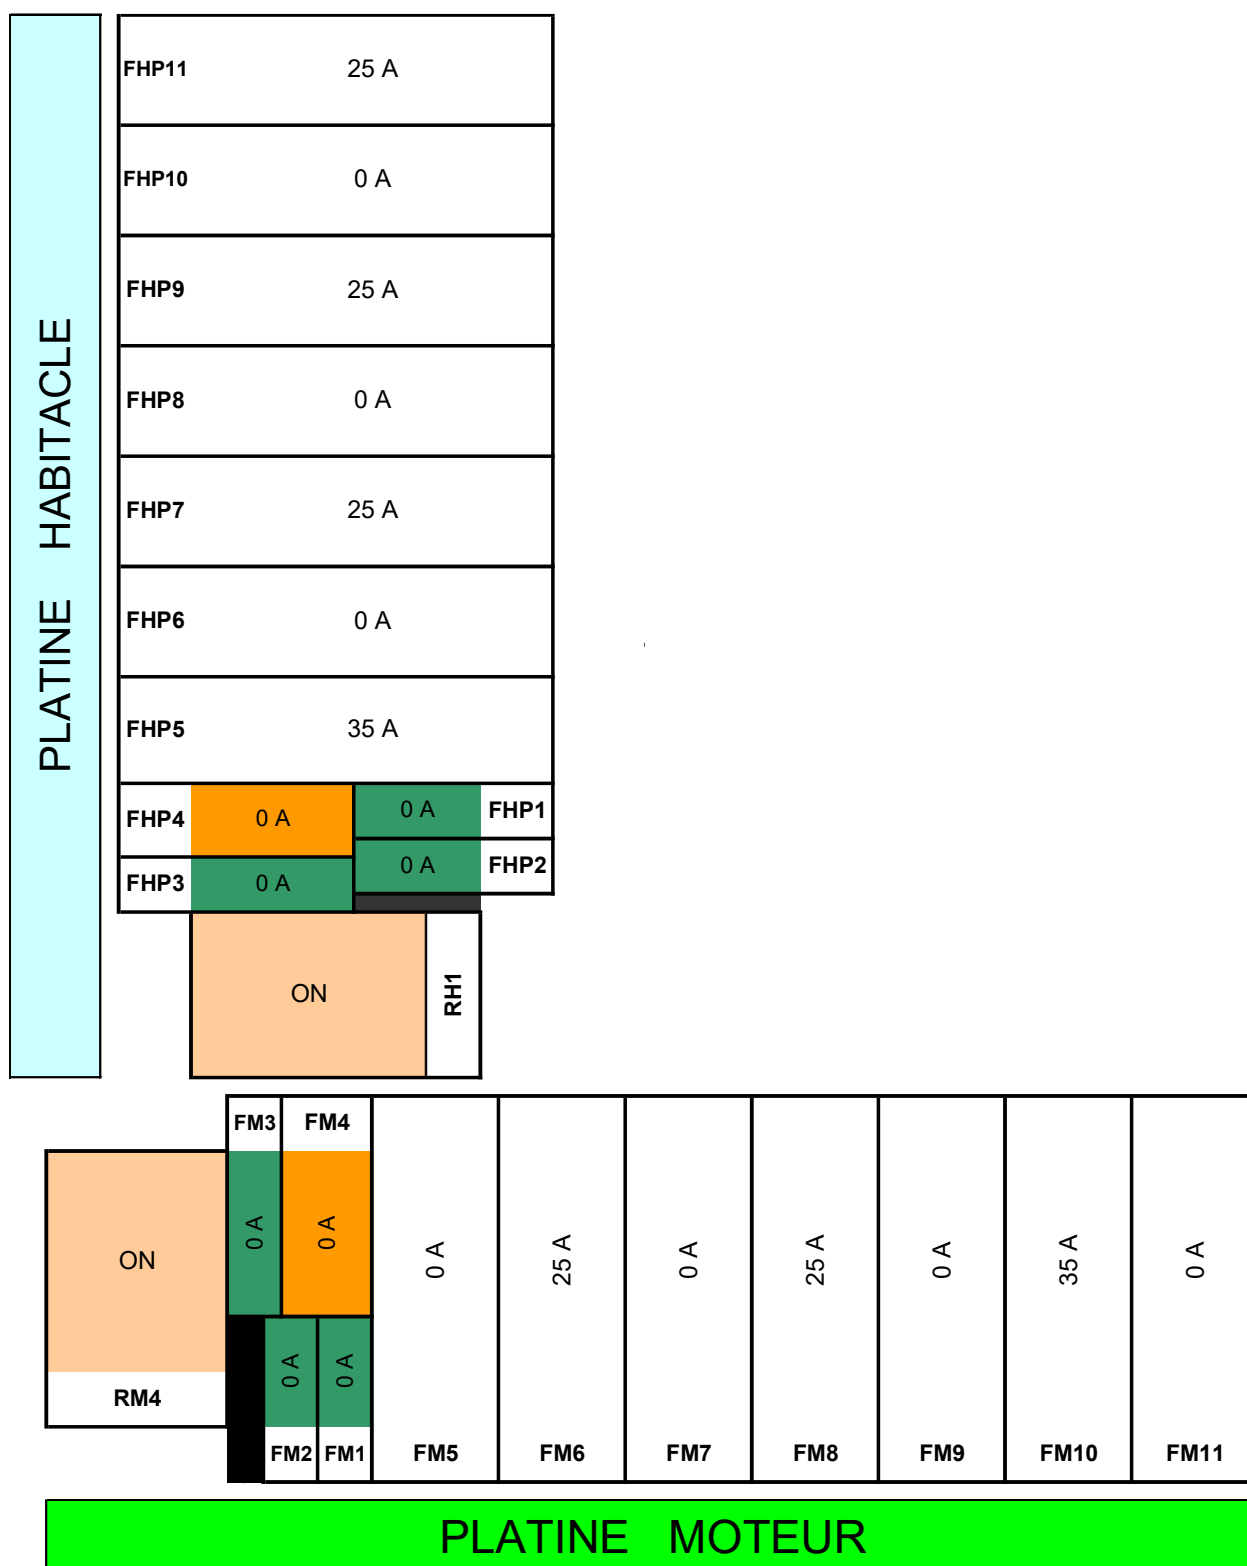
APPENDIX 5 : CURRENT LOAD SCENARIOS AT 85°C

Specific wiring architecture only for this test



Specific fuse rating only for this test





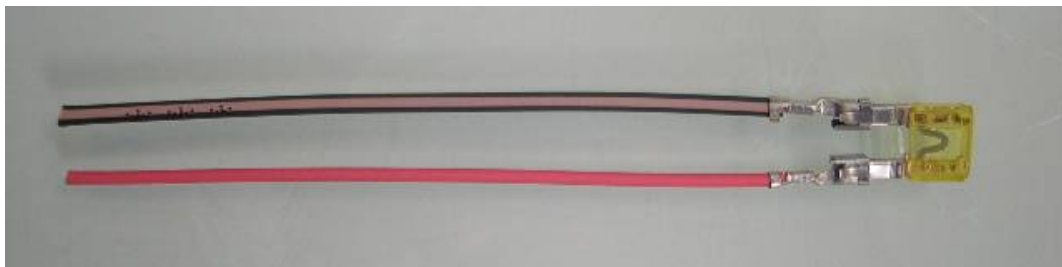
APPENDIX 6 : CONTACT RESISTANCE

Contact resistance measurement point for busbar: 



Contact resistance measurement for fuses:

The method is similar for fuses wired on both tabs and fuses wired on one side and connected to the busbar on the other side.



The wire length is 100mm. depending on the configuration (wire or busbar).

The resistance of:

 The fuse,

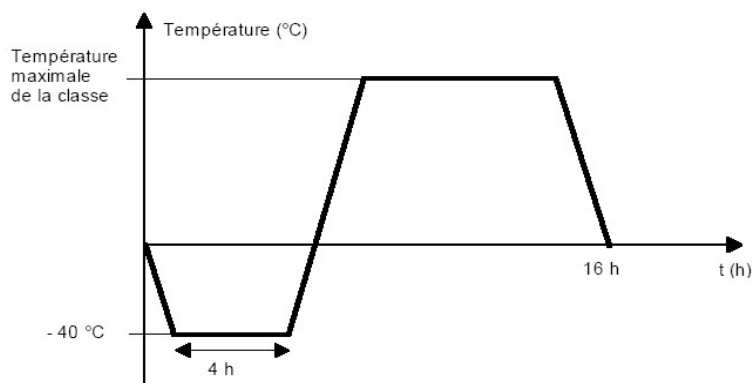
 The one or two wires

are removed from the resistance measurement.

The criterion of acceptance is the sum of both connexions on the both fuse tabs.

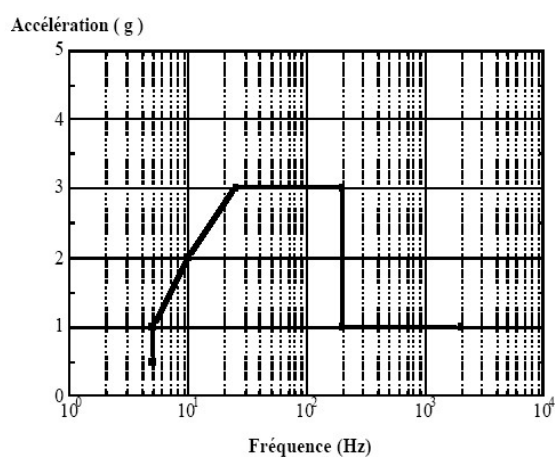
APPENDIX 7: VIBRATION PROFILE

- Temperature cycling during vibration endurance test:



Tmin = -40°C
 Tmax = +100°C
 Temperature variation:
 40°C/hour
 Maintaining at extreme
 temperature: 4h

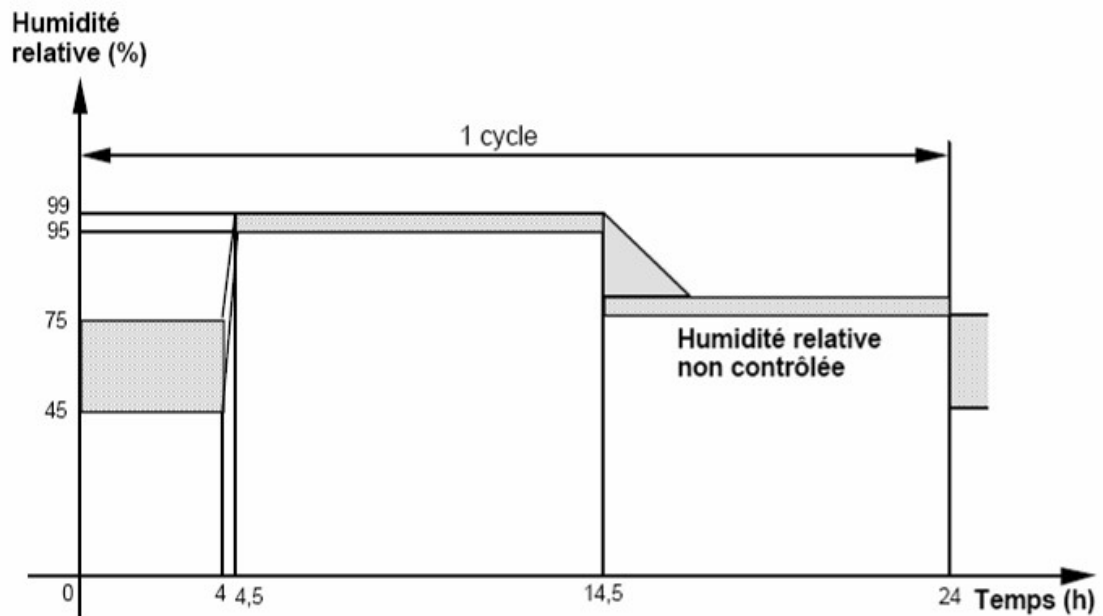
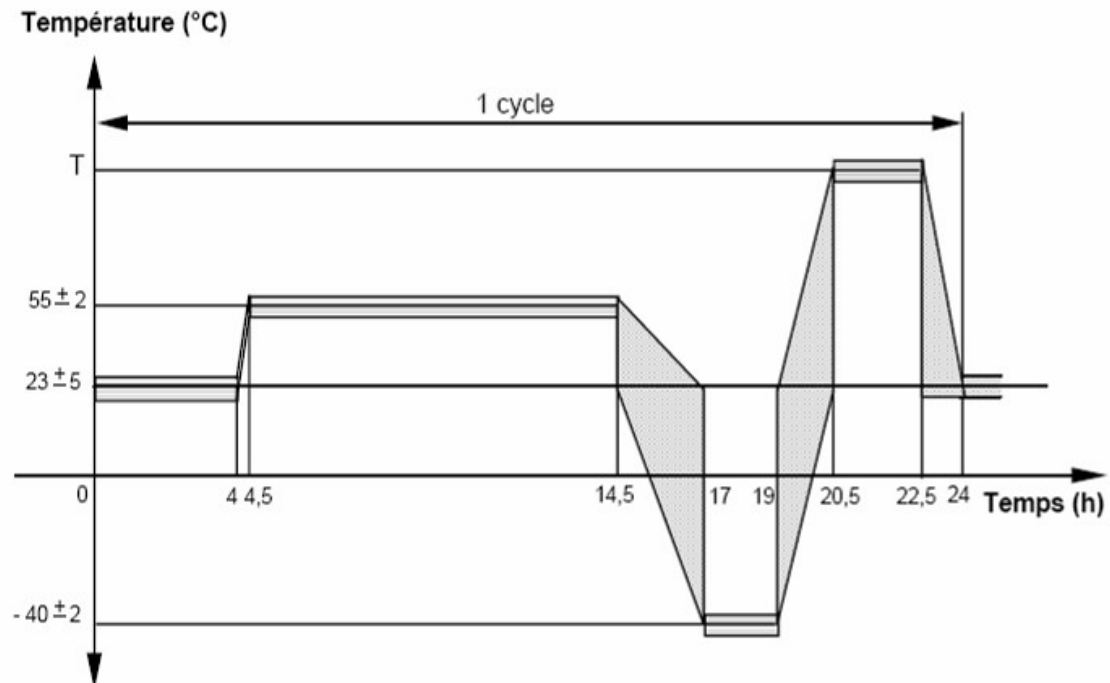
- Vibration profile:


















Fréquences	Accélération
5 Hz	0,5 g à 1 g
10 Hz	2 g
25 Hz à 200 Hz	3 g
200 Hz	3 g à 1g
200 Hz à 2000 Hz	1 g

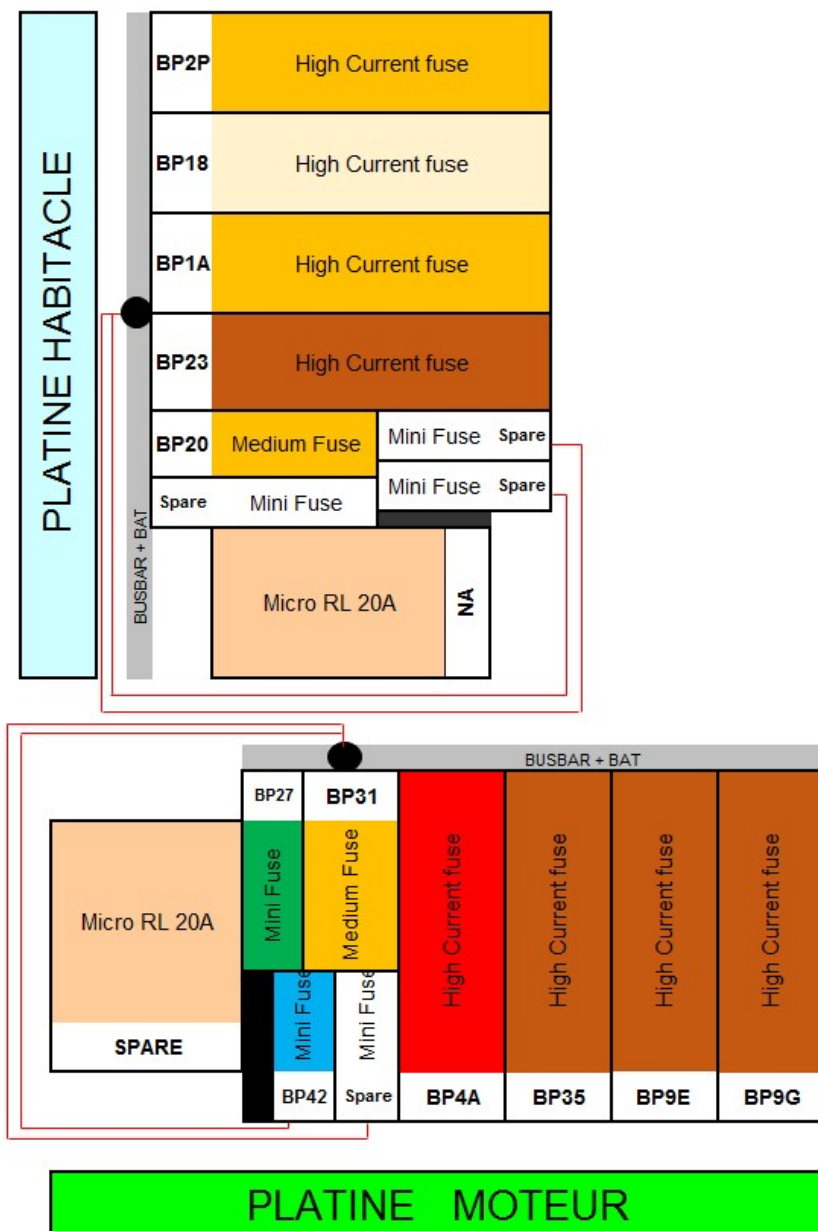
APPENDIX 8: TEMPERATURE HUMIDITY CYCLE

Tmax = 100°C

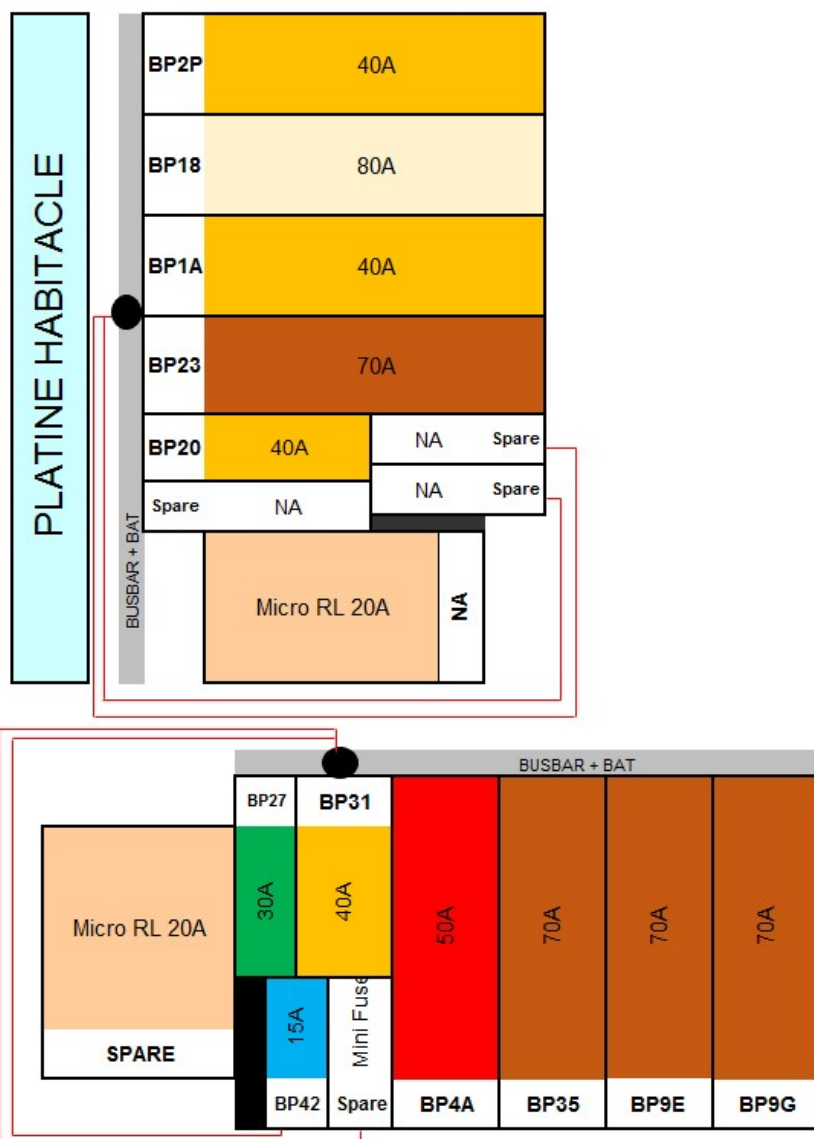


APPENDIX 9: DESCRIPTION OF MECHANICAL TESTS ON BOXES

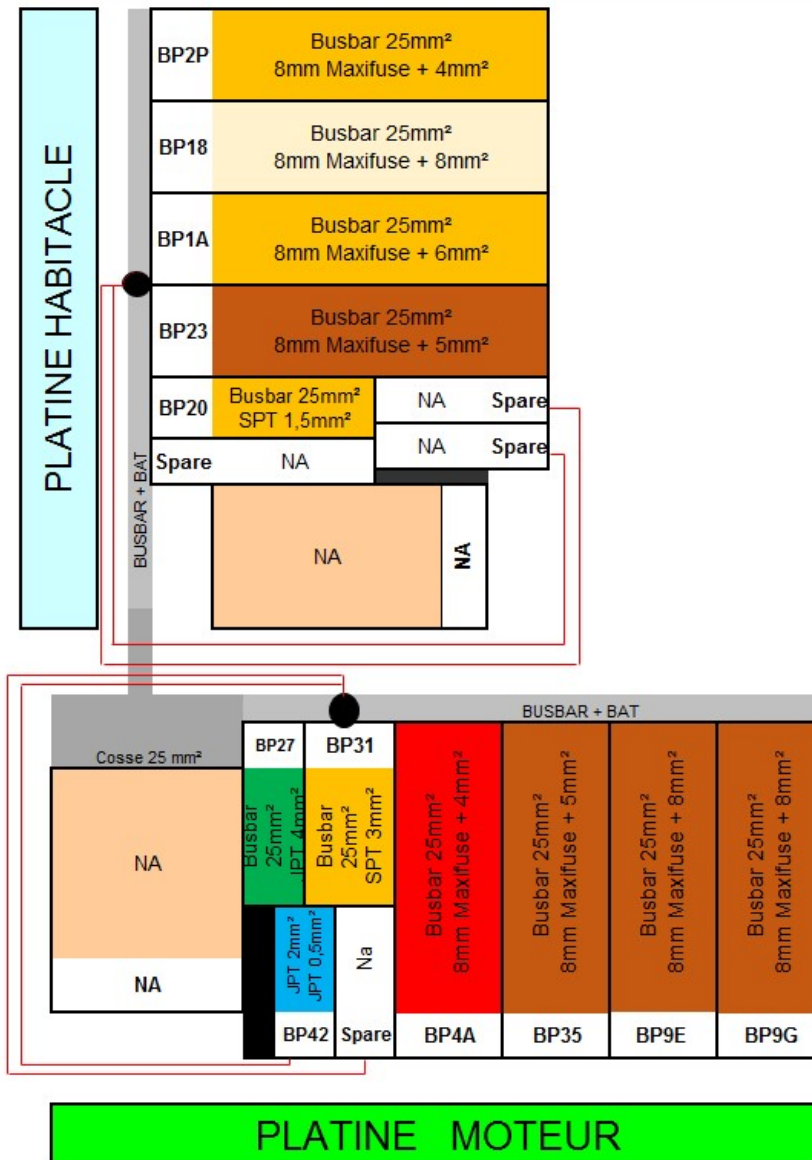
	Insertion test	Removal test Locking system inactive	Retention forces test	Area for shock impact test
ERFB BOX				
Box3				
Relay holder 20A micro-relay				
Relay holder 40A				
Relay holder 70A				

APPENDIX 10 : CURRENT LOAD SCENARIOS AT 85°C FOR ERFB 4 HIGH CURRENT FUSES
CONFIGURATION FUSIBLE


CONFIGURATION CALIBRE



CONFIGURATION SECTION DE CÂBLES



CONFIGURATION SCENARIO 85°C 10 min / 35 min

