

The performance of applicable product is guaranteed only when processed by proper application tooling and condition described in this specification and/or AMP recognized ones. No product is guaranteed when processed with the other tool or condition.

1. Scope

This specification covers the requirements for crimping of 025 TH Tab Contact.

2. Applicable Contacts

AMP Part Numbers	Finish	Applicable Wires
1674742-1	Tin Plating	AVSS/CAVS/AVSSH 0.3~0.5 CAVUS 0.3~0.5

3. Nomenclature

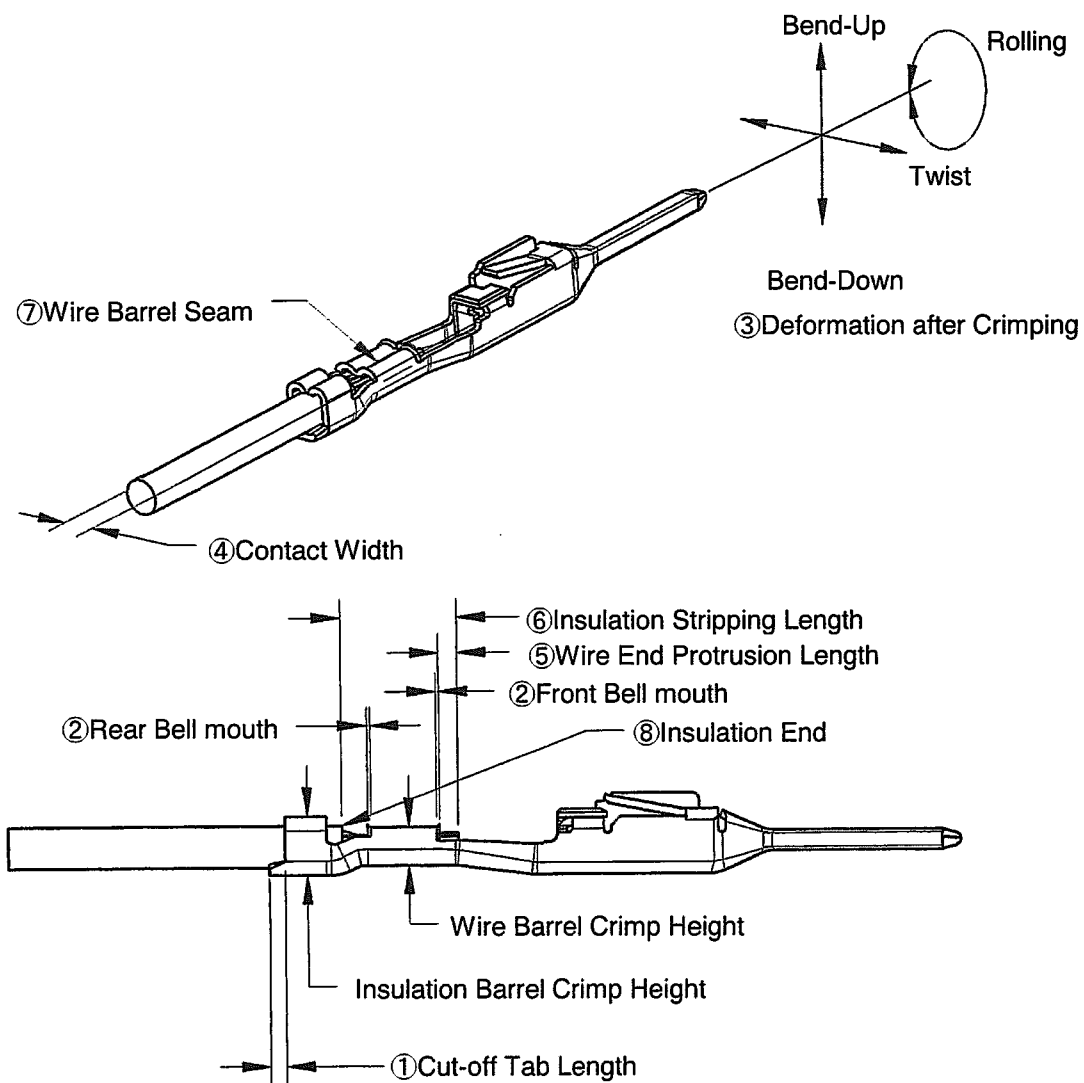


Fig1

4. Crimping Condition

4.1 Applicator Crimp

Check Items		AVSS/CAVS/AVSSH 0.3 CAVUS 0.3~0.5	AVSS/CAVS/AVSSH 0.5	Remarks
1	Cut-off Tab Length	0.1~0.5 mm		Fig.1-①
2	Bell mouth	Front	0.2 mm Max.	Fig.1-②
		Rear	0.1~0.4 mm	
3	Deformation After Crimping	Bend	-1° , +2° Max.	Fig.1-③
		Twist	±4° Max.	
		Rolling	±10° Max.	
4	Contact Width after Crimping ⁽¹⁾	1.6mm Max.	1.8mm Max.	Fig.1-④
5	Wire End Protrusion Length	0~1.0 mm		Fig.1-⑤
6	Insulation Stripping Length	3.0~3.5 mm		Fig.1-⑥
7	Wire Barrel Seam	Seam must be closed (No strand looses out of the seam)		Fig.1-⑦
8	Insulation End	Insulation End must be between Wire barrel and Insulation Barrel		Fig.1-⑧

NOTE (1) There is possibility of the dimension is different caused of the ability of operator.
Make sure the contact must be inserted smoothly into the Cap housing.

5. Crimp Data

5.1 Applicator Crimp

Contact Part Number (Strip Form)	Wire Size (Nominal)	Applicator Part Number	Wire Barrel Crimp (mm)			Insulation Barrel Crimp (mm)			Crimp Tensile Strength (N)
			Width ⁽²⁾	Height ⁽¹⁾	Disk Ltr.	Width ⁽²⁾	Height ⁽¹⁾	Disk Ltr.	
1674742-1	0.3	1463982-2	1.4 "F"	0.96	B	1.4 "F"	See Para. 6	70 Min. ⁽³⁾	
	0.3f			1.01	A			90 Min.	
	0.5								

NOTE (1) Wire Barrel Crimp Height to be within ±0.05

(2) Crimp Width dimensions are not the product width after crimping, but given by the width of crimper slot for reference

(3) Crimp Tensile Strength of 0.3 wires includes the wire grip of insulation barrel crimp.

6. Insulation Barrel Crimp Data

Contact Part Number (Strip Form)	Wire Size (Nominal)	AVSSH/AVSS/CAVS		CAVUS	
		Height ⁽¹⁾ (mm)	Disk Ltr. (Ref.)	Height ⁽¹⁾ (mm)	Disk Ltr. (Ref.)
1674742-1	0.3/0.3f	1.85	4	1.75	5
	0.5	1.85	4	1.85	4

NOTE (1) Insulation Barrel Crimp Height to be within ± 0.1

7. Applicable Wire Data

Wire Size (Nominal)	Number/Diameter (mm) of Conductor	Calculated Cross sectional Area (mm ²)	Insulation Diameter (mm)			
			AVSSH/AVSS/CAVS		CAVUS	
			STD.	MAX.	STD.	MAX.
0.3	7/0.26	0.3716	1.4	1.5	1.1	1.2
0.3f	19/0.16	0.3821	1.4	1.5	—	—
0.5	7/0.32	0.5629	1.6	1.7	1.3	1.4