
	REVISION					
REV	DESCRIPTION	DATE	APPROVED			
Α	INITIAL RELEASE SEE ECO-18-007691	5/16/2018	L.RODRIGUEZ			

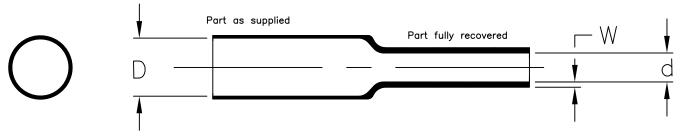

SIZE	ID φ AS SUPPLIED	ID φ AS RECOVERED	RECOVERED WALL THICKNESS	
SIZE	D MINIMUM	d MAXIMUM	AFTER HEATING (NOM)	
1/4	6.35 (.250)	3.63 (.143)	0.88 (.035)	
3/8	9.52 (.375)	5.43 (.214)	1.01 (.040)	
1/2	12.70 (.500)	7.25 (.286)	1.21 (.048)	
5/8	15.87 (.625)	9.06 (.357)	1.32 (.052)	
3/4	19.05 (.750)	10.87 (.428)	1.44 (.057)	
7/8	22.22 (.875)	12.70 (.500)	1.65 (.065)	
1	25.40 (1.000)	14.47 (.570)	1.77 (.070)	
1 1/4	31.75 (1.250)	18.13 (.714)	2.20 (.087)	
1 1/2	38.10 (1.500)	21.76 (.857)	2.41 (.095)	
13/4	44.45 (1.750)	25.40 (1.000)	2.71 (.107)	
2	50.80 (2.000)	28.95 (1.140)	2.79 (.110)	

NOTES:

- 1. THIS PRODUCT IS DESIGNED FOR A WIDE RANGE OF APPLICATIONS, AND MEETS THE PERFORMANCE REQUIREMENTS OF TE SPECIFICATION RT-1140.
- 2. PACKAGED AND SUPPLIED ON A SPOOL AND LABELED WITH (example: SFR-3/8-0), PART NUMBERING SYSTEM: SFR= PART NUMBER, 3/8= ORDER SIZE, -0= BLACK (STANDARD COLOR).
- 3. ALWAYS ORDER THE LARGEST SIZE THAT WILL SHRINK SNUGLY OVER THE COMPONENT TO BE COVERED.
- 4. FOR MATERIAL AND FINISH INFORMATION REFER TO RT-1140 SPECIFICATION. FOR SPECIAL ORDER SIZES, CONTACT TE CONNECTIVITY.

Raychem Harness & Components **CUSTOMER DRAWING** © 2018 TE Connectivity Corporation. All rights reserved.

	AND INCH DIMENSIONS	ECIFIED DIMENSIONS ARE ARE IN SHOWN IN (PARE	in Millimeters. Ntheses).		
	.000 ± DECIMALS: .00 ± .0 ±	0.00 ANGLES	S: ± 0' 00'	þ	TE Connectivity
	THE RIGHT TO AMEND THIS DRAWING AT ANYTIME. USERS SHOULD EVALUATE THE		TITLE: SFR	TUBING, HEAT—SHRINKABLE FLAME RETARDED	
			DRAWING NO:	SFR	
DRAWN: 15MAY2018 G.ROSITANO	CHECKED: 15MAY2018 L.R.	APPROVED: 16MAY2018 L.RODRIGUEZ	CAGE CODE 06090	CAD FILE: SFR_cd	SIZE: SCALE: THIRD ANGLE PROJ. SHEET: A