




REVISIONS				
P.	LTH	DESCRIPTION	DATE	APP'D
A		RELEASED PER ECO-17-002820	01MAR2017	VP MDB

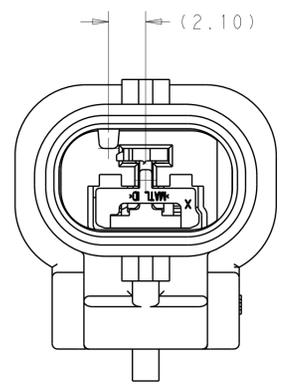


KEY CODE A  
SCALE 5:1

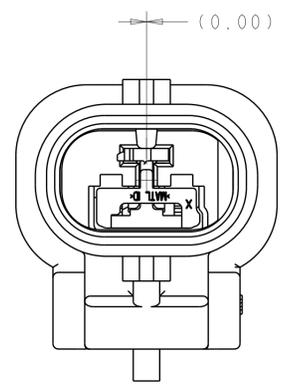

KEY CODE B  
SCALE 5:1

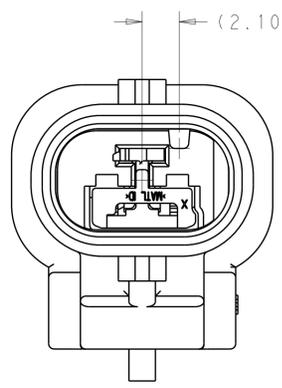


KEY CODE C  
SCALE 5:1

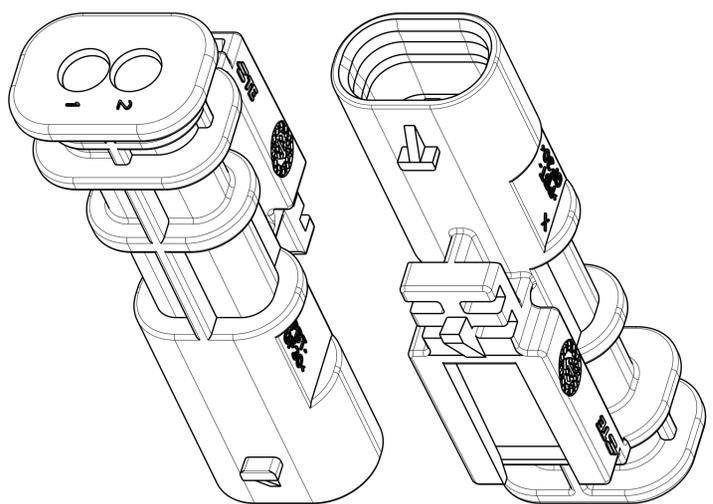


ISOMETRIC VIEWS  
SCALE 4:1


1. CAP ASSEMBLY IS SHIPPED WITH TPA IN PRE-STAGED POSITION. SEE INSTRUCTION SHEET 408-32094 FOR CONNECTOR SERVICE AND TPA OPERATION.
2. TERMINALS SOLD SEPARATELY. FOR USE WITH TE MCON 1.2mm CLEAN BODY TAB CONTACT WITH WIRE SEAL. SEE TABLE.
3. FOR OPTIONAL TERMINAL CAVITY BLOCKING, CONTACT TE SALES REPRESENTATIVE OR CUSTOMER SERVICE.
4. CONTACT PLATING AND APPLICABLE INDIVIDUAL WIRE SEAL ARE APPLICATION DEPENDENT. CONTACT TE SALES REPRESENTATIVE OR CUSTOMER SERVICE FOR DETAILS.
5. FOR WIRE CRIMP DETAILS, SEE TE APPLICATION SPECIFICATION 114-18464.
6. DOCUMENTED I.C.D. IS SPECIFIED TO MEET MOST WIRE SEAL APPLICATIONS. HOWEVER, I.C.D. IS HIGHLY DEPENDENT ON INSULATION TYPE AND OD. SUFFICIENT GRIP OF THE WIRE SEAL MUST BE OBTAINED SUCH THAT WIRE SEAL DOES NOT DISPLACE FROM INSULATION GRIP DURING CONTACT INSERTION INTO CONNECTOR HOUSING. THE WIRE SEAL SHALL NOT BE CRIMPED TOO TIGHTLY THAT THE WIRE SEAL TEARS DURING THE CRIMPING OPERATION.
7. CAP ASSEMBLY ACCEPTS ACCESSORY CLIPS DESIGNED TO FUNCTION IN CLIP SLOT DEFINED BY EWCAP-005-7, REVISION A.
8. TRACEABILITY CODE (YY = TWO DIGIT YEAR, JJJ = 3 DIGIT JULIAN DAY, S = 1 DIGIT SHIFT).




WIRE CRIMP DIMENSIONS




INSULATION CRIMP DIMENSIONS

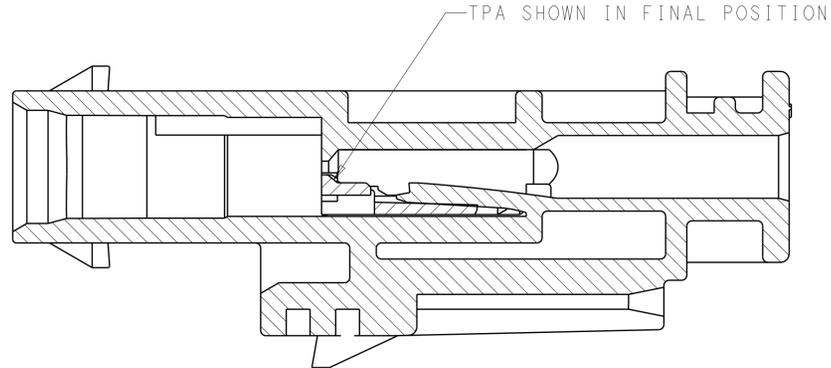

SECTION Z-Z

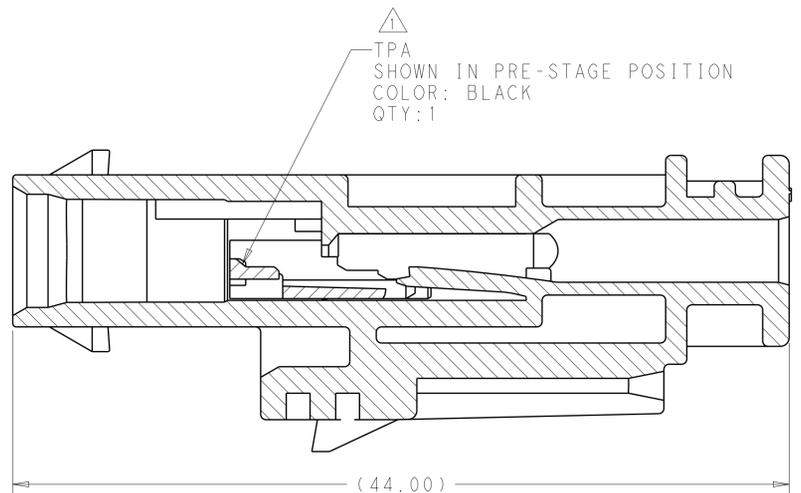

SECTION Z-Z

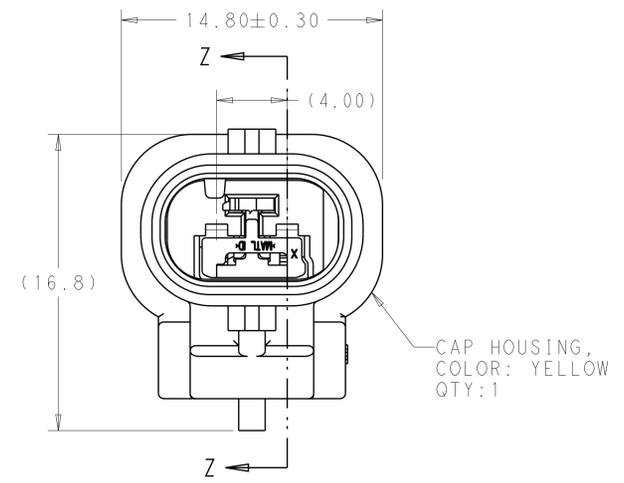

CAP HOUSING,  
COLOR: YELLOW  
QTY: 1

TPA SHOWN IN PRE-STAGE POSITION  
COLOR: BLACK  
QTY: 1

C	2203805-3
B	2203805-2
A	2203805-1
KEY CODE	PART NUMBER

125°C	2141114	1.40-1.90mm	5	5	5 6	967067-1
	2141116	1.40-1.90mm				967067-1
	2177610	1.90-2.40mm				964972-1
MAX TEMP 4	MALE TERMINAL P/N	APPLICABLE WIRE FINISHED O.D.	W.C.H.	W.C.W.	I.C.D.	WIRE SEAL PART NUMBER 4

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	0 PLC ±
	1 PLC ±
	2 PLC ±
	3 PLC ±
	4 PLC ±
ANGLES	±
MATERIAL	FINISH

TE Connectivity  
 CAP ASSEMBLY,  
 2 POSITION, SEALED, MCON SIR

SIZE: A1 CAGE CODE: 00779 DRAWING NO: 2203805  
 SCALE: 5:1 SHEET 1 OF 1 REV A