

## **RAYCHEM SINGLE PAIR ETHERNET (SPE) CABLES**

---

ENABLING 100 MB/S OR 1 GB/S ETHERNET CONNECTIVITY USING  
A SINGLE PAIR ETHERNET DESIGN



Enabling 100 Mb/s or 1 Gb/s ethernet connectivity using a Single Pair ethernet design



## Description

TE Connectivity (TE) has released a Single Pair Ethernet (SPE) cable that enables the transmission of data by ethernet using one twisted pair. This product is currently capable of transmission rates ranging from 100 Mb/s to 1 Gb/s.

## ELECTRICAL/ENVIRONMENTAL

- **Differential Impedance:** 100 +/- 10  $\Omega$
- **Attenuation (Max.) at 600 MHz:**  
24 AWG: 14.4dB/15m  
26 AWG: 14.4dB/15m
- **Mutual Capacitance (Max.) at 1 kHz:** 13 pF/1ft
- **Temperature Rating:** -65°C to +150°C

## MATERIALS

- **Conductors:** 24 and 26 AWG Silver-coated high strength copper alloy
- **Dielectric:** Foamed FEP
- **Inner Shield:** Al/PET
- **Shielding:** Silver-coated copper
- **Jacket:** FEP
- **Available Jacket Colors:** Laser markable white, black, white, brown, red, orange, yellow, green, blue, violet, gray and clear (translucent available)

## APPLICATIONS

- Avionics
- Inflight Entertainment (IFE)
- Galley Systems
- Interior Cabin Lighting
- eVTOL (Electric Vertical Takeoff and Landing)

## STANDARDS AND SPECIFICATIONS

- Meets requirements of ARINC 800
- Flammability: FAR Part 25, Appendix F, Part 1 & AS4373
- Smoke Density and Toxicity: BSS7238, BSS7239, AITM 2-0008 and AITM 3-0005

## MARKETS SERVED

- Military Aerospace
- Commercial Aerospace
- Defense
- Low Earth Orbit Satellites
- eVTOL

## RUGGED

- Meets many stringent aerospace industry flammability, smoke and toxicity requirements

## REDUCED SIZE AND WEIGHT

- Compared to existing multi-pair ethernet systems
- Termination time: Octax/Quadrax: 15-20 minutes vs. 369: 2-5 minutes

## REDUCED INSTALLATION TIME


- Single pair cable vs. 2 or 4 pair Ethernet cables

## VERSATILE

- End to end solution using TE ARINC 854 connectors



# Raychem Single Pair Ethernet (SPE) Cables

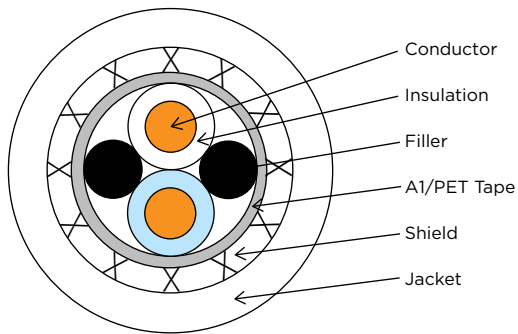

TE Description	TE Part Number	Temperature Range (°C)	Jacket OD (in/mm), Nom.	ARINC 854 Connector Compatibility	Molded Boot Compatibility
0024B8424-9	EP3169-000	-65 to +150°C	0.161 (4.089)	YD369-MP99-NP10000	202D971-4/86-0
0026G8424-9	EP3166-000	-65 to +150°C	0.135 (3.429)	YD369-MP99-NP10000	202D971-4/86-0

Additional constructions and custom designs available upon request - please contact your local account representative for questions

## Complete System Solutions



End-to-End Solutions

### 369 Series Shielded Connectors

- 100Base-T1 standard
- 15 m link with four connector breaks
- Reduces termination complexity
- (369) 2-5 minutes vs. (Quadrax) 6-10 minutes



Molded Parts

### Molded Parts

- Molded part shape designed specifically for use with 369 connector and Single-Pair Ethernet cable
- Flexible polyolefin (-4) material provides strain relief, environmental sealing, and abrasion resistance
- High temperature adhesive (/86) for bonding with cable jacket or heat shrink tubing
- Low profile design and 2:1 heat shrink ratio for ease of installation

Empower Engineers to Solve Problems, Moving the World Forward.

AMP | AGASTAT | CII | HARTMAN | KILOVAC | MICRODOT | NANONICS | POLAMCO | Raychem  
SEACON | Rochester | DEUTSCH

## Connect With Us

We make it easy to connect with our experts and are ready to provide all the support you need. Visit [te.com/support](https://te.com/support) to chat with a Product Information Specialist.

### [te.com/single-pair-ethernet](https://te.com/single-pair-ethernet)

AMP, AGASTAT, CII, DEUTSCH, HARTMAN, KILOVAC, MICRODOT, NANONICS, POLAMCO, Raychem, SEACON, TE, TE Connectivity, and TE Connectivity (logo) are trademarks owned or licensed by TE Connectivity. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2021 TE Connectivity All Rights Reserved.

2386805-1 03/21

### RAYCHEM SINGLE PAIR ETHERNET (SPE) CABLES

TE Connectivity  
Aerospace, Defense & Marine  
2900 Fulling Mill Road  
Middletown, PA 17057