



EN3660 QUALIFIED BACKSHELLS

HIGH PERFORMANCE BACKSHELLS FOR EN2997 AND
EN3645 CONNECTORS



VERSATILE PRODUCT OFFERING

- Compatible with all defined shell sizes
- Available in a variety of materials and plating finishes

HIGH RELIABILITY

- Provides strain-relief and cable support to help prevent bending or overflexing
- Individual or overall screening against EMI/RFI interference
- Helps protect the connector and cable when combined with a heat shrinkable boot by preventing water and dirt ingress into the harness system

EASY INSTALLATION

- Simple and fast termination solutions

TARGET MARKETS

- Commercial Aerospace
- Military Aerospace
- Ground Defense
- Marine
- Space



For High-Performance Sealing and Strain Relief, the Ideal Mate for a Connector in a Wiring Application is a TE Backshell

TE Connectivity (TE) supplies a comprehensive range of circular backshells and accessories fully qualified to EN3660 that offer harness strain relief for harsh environments, environmental sealing with features for heat shrinkable boots and outlet connections for screen termination bands. These products help manage electromagnetic interference (EMI)/radio frequency interference (RFI) in order to meet the requirements of many military and commercial aerospace applications.

Rugged Designs that Save Weight

When it comes to taming harsh environments, TE offers a broad array of shell styles, materials, and finishes to help meet the requirements of a program.

These highly durable circular backshells are time tested for reliability in some of the toughest environments

Solve Tough Application Challenges with TE

We work closely with customers to help meet their most demanding requirements for some of the world’s toughest applications. Whether for commercial or military aerospace applications, TE designs and manufactures circular backshells and accessories to be ruggedly reliable, easy to install, lighter, and with more options. Various materials and configurations help maximize performance, reliability, and efficiency.

Contents

EN3660-003 Grommet Nut	3
EN3660-004 Cable Outlet, Straight, Unsealed with Clamp Strain Relief	4
EN3660-005 Cable Outlet, 90°, Unsealed with Clamp Strain Relief	5
EN3660-062 Cable Outlet, 90°, for Heat Shrink Boot, Shielded, Sealed and Self-Locking	6
EN3660-063 Cable Outlet, Straight, for Heat Shrink Boot, Shielded, Sealed and Self-Locking	7
EN3660-064 Cable Outlet, Straight, for Heat Shrink Boot, Shielded, Sealed and Self-Locking	8
EN3660-065 Cable Outlet, 90°, for Heat Shrink Boot, Shielded, Sealed and Self-Locking	9
EN3660-033 Stainless Steel Screen Termination Band	10

EN3660-003 Grommet Nut

Interface Compatible with EN2997

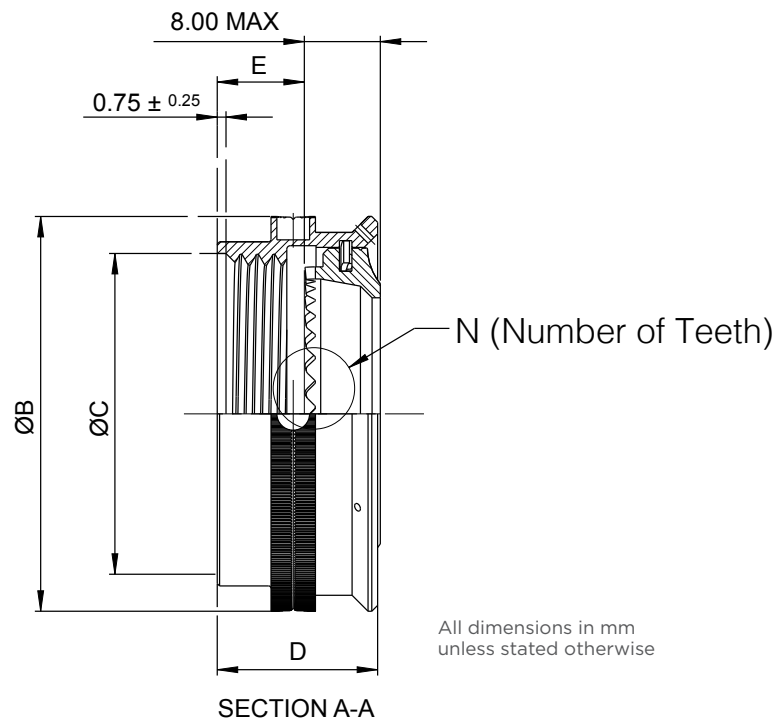


TABLE 1

Class	Material/Finish
F/N	Aluminum/Nickel Plated
K	Stainless Steel/Passivated
W	Aluminum/Olive Drab Cadmium Plated

SERIES _____ **EN3660-003** _____ **W** _____ **15** _____ **A**

CLASS, MATERIAL FINISH (TABLE 1) _____

SHELL SIZE (TABLE 2) _____


VARIANT (A = STANDARDIZED INTERFACE) _____

TABLE 2

Shell Size	Thread (Inches)	N	Ø B +0.00/-0.10	Ø C ± 0.20	D +0.00/-0.10	E ± 0.1
08	1/2-20 UNF	12	19.27	13.18	13.72	7.45
10	5/8-24 UNEF	15	22.27	16.32	13.72	7.45
12	3/4-20 UNEF	21	25.27	19.49	13.72	7.45
14	7/8-20 UNEF	24	28.47	22.67	13.72	7.45
16	1-20 UNEF	30	31.47	25.84	13.72	7.45
18	1 1/16-18 UNEF	33	33.77	27.44	13.72	7.45
20	1 3/16-18 UNEF	36	37.07	30.62	13.72	7.45
22	1 5/16-18 UNEF	39	40.47	33.79	13.72	7.45
24	1 7/16-18 UNEF	42	43.87	36.97	13.72	7.45
28	1 3/4-18 UNS	54	50.35	44.89	16.30	7.45

EN3660-004 Cable Outlet, Straight, Unsealed with Clamp Strain Relief

Interface Compatible with EN2997

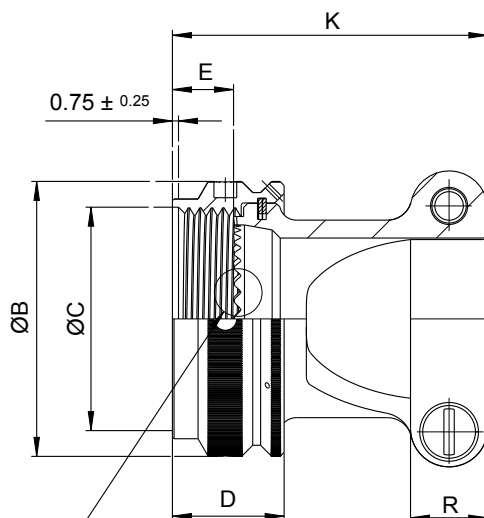

N (Number of Teeth)

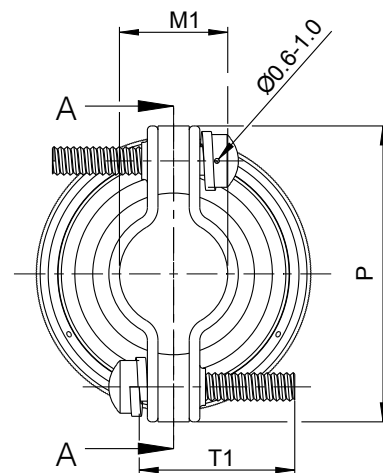


TABLE 1

Class	Material/Finish
F/N	Aluminum/Nickel Plated
K	Stainless Steel/Passivated
W	Aluminum/Olive Drab Cadmium Plated

All dimensions in mm unless stated otherwise

SERIES ————— **EN3660-004**

CLASS, MATERIAL FINISH (TABLE 1) ————— **W**

SHELL SIZE (TABLE 2) ————— **15**

VARIANT A = M ENTRY AND T SCREW ————— **B**

B = M1 ENTRY AND T1 SCREW

TABLE 2

Shell Size	Thread (Inches)	N	Ø B +0.00/-0.10	Ø C ± 0.20	D +0.00/-0.10	E ± 0.1	K ± 1.57	P ± 0.1	M1 Min	M1 Max	T1
08	1/2-20 UNF	12	19.27	13.18	13.72	7.45	22.61	18.54	3.2	5.2	12.7
10	5/8-24 UNEF	15	22.27	16.32	13.72	7.45	25.4	20.54	4.8	7.3	12.7
12	3/4-20 UNEF	21	25.27	19.49	13.72	7.45	28.58	24.54	7.4	10.6	15.9
14	7/8-20 UNEF	24	28.47	22.67	13.72	7.45	28.58	26.04	9.0	12.0	15.9
16	1-20 UNEF	30	31.47	25.84	13.72	7.45	31.75	32.94	12.8	16.0	15.9
18	1 1/16-18 UNEF	33	33.77	27.44	13.72	7.45	38.1	36.34	13.2	18.0	19.1
20	1 3/16-18 UNEF	36	37.07	30.62	13.72	7.45	41.28	38.94	15.0	21.0	22.3
22	1 5/16-18 UNEF	39	40.47	33.79	13.72	7.45	43.18	41.44	16.3	24.3	25.4
24	1 7/16-18 UNEF	42	43.87	36.97	13.72	7.45	47.62	44.54	18.0	27.5	28.6
28	1 3/4-18 UNS	54	50.35	44.89	16.30	7.45	55.55	50.74	19.0	30.0	31.8

Note
Table 2, M1 and T1 dimensions shown are only for variant B
Variant A, M and T dimensions are compliant to EN3660

EN3660-005 Cable Outlet, 90°, Unsealed with Clamp Strain Relief

Interface Compatible with EN2997

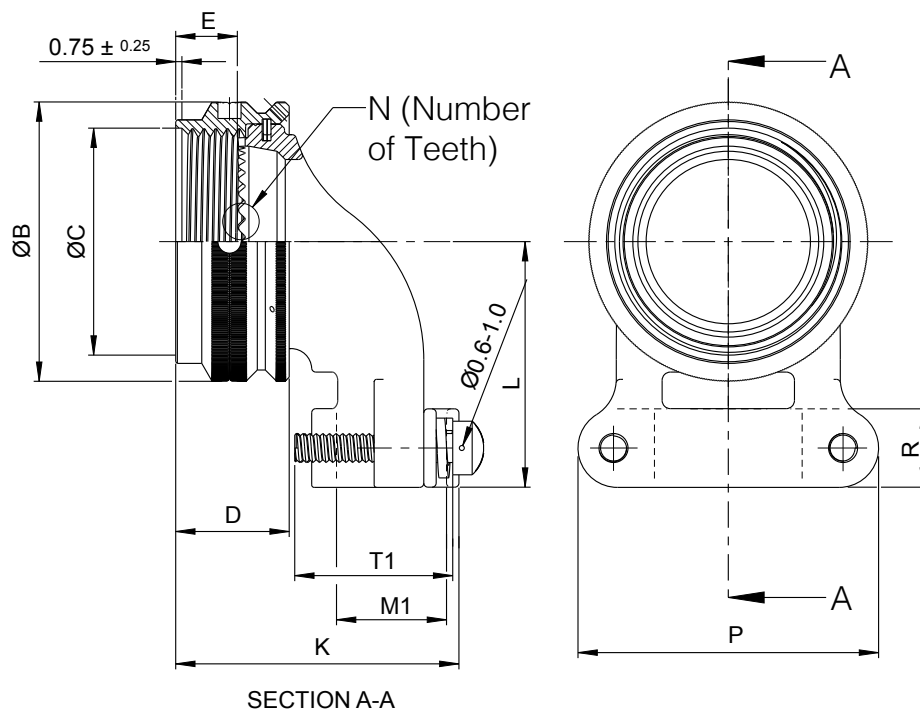


TABLE 1

Class	Material/Finish
F/N	Aluminum/Nickel Plated
K	Stainless Steel/Passivated
W	Aluminum/Olive Drab Cadmium Plated

All dimensions in mm unless stated otherwise

SERIES _____ **EN3660-005** _____ **W** _____ **15** _____ **B**

CLASS, MATERIAL FINISH (TABLE 1) _____

SHELL SIZE (TABLE 2) _____

VARIANT A = M ENTRY AND T SCREW _____

B = M1 ENTRY AND T1 SCREW

TABLE 2

Shell Size	Thread (Inches)	N	Ø B +0.00/-0.10	Ø C ± 0.20	D +0.00/-0.10	E ± 0.1	K ± 1.57	P ± 0.1	M1 Min	M1 Max	T1
08	1/2-20 UNF	12	19.27	13.18	13.72	7.45	22.61	18.54	3.2	5.2	12.7
10	5/8-24 UNEF	15	22.27	16.32	13.72	7.45	25.4	20.54	4.8	7.3	12.7
12	3/4-20 UNEF	21	25.27	19.49	13.72	7.45	28.58	24.54	7.4	10.6	15.9
14	7/8-20 UNEF	24	28.47	22.67	13.72	7.45	28.58	26.04	9.0	12.0	15.9
16	1-20 UNEF	30	31.47	25.84	13.72	7.45	31.75	32.94	12.8	16.0	15.9
18	1 1/16-18 UNEF	33	33.77	27.44	13.72	7.45	38.1	36.34	13.2	18.0	19.1
20	1 3/16-18 UNEF	36	37.07	30.62	13.72	7.45	41.28	38.94	15.0	21.0	22.3
22	1 5/16-18 UNEF	39	40.47	33.79	13.72	7.45	43.18	41.44	16.3	24.3	25.4
24	1 7/16-18 UNEF	42	43.87	36.97	13.72	7.45	47.62	44.54	18.0	27.5	28.6
28	1 3/4-18 UNS	54	50.35	44.89	16.30	7.45	55.55	50.74	19.0	30.0	31.8

Note
Table 2, M1 and T1 dimensions shown are only for variant B
Variant A, M and T dimensions are compliant to EN3660

EN3660-062 Cable Outlet, 90°, for Heat Shrink Boot, Shielded, Sealed and Self-Locking

Interface Compatible with EN3645

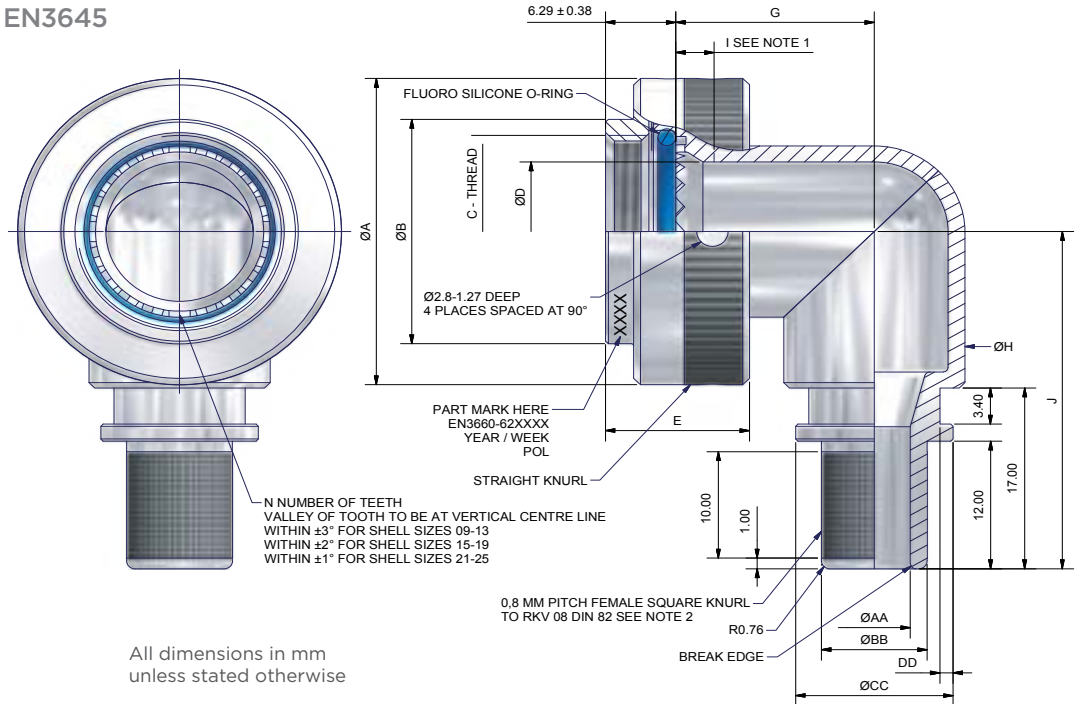


TABLE 1

Class	Material/Finish
F/N	Aluminum/Nickel Plated
K	Stainless Steel/Passivated
W	Aluminum/Olive Drab Cadmium Plated

SERIES _____ **EN3660-062** **W** **15** **B**

CLASS, MATERIAL FINISH (TABLE 1) _____

SHELL SIZE (TABLE 2) _____

CABLE ENTRY SIZE CODE (TABLE 4) _____

TABLE 4

Cable Entry Size Code	AA ± 0.1	BB ± 0.1	CC ± 0.3	DD + 0.2/-0
A	4.7	7.7	12.2	1.12
B	6.4	9.4	14.0	1.12
C	7.9	11.0	15.5	1.12
D	9.5	12.6	17.1	1.12
E	11.1	14.1	18.7	1.12
F	12.7	15.7	20.3	1.12
G	15.9	18.9	23.5	1.12
H	19.1	22.0	26.7	1.12
J	22.2	25.2	29.8	1.75
K	25.5	28.4	33.0	1.75
L	28.6	31.5	36.2	1.75
M	31.8	34.7	39.4	1.75

TABLE 2

A Max	B Max	C Thread	D Min	E Max	G Max	H Max	J Max	I Min	N	Shell Size	Maximum Entry Size
21.79	15.24	M12x1.0-6H	6.70	16.76	14.85	10.20	31.05	2.90	12	09	D
24.99	18.21	M15x1.0-6H	9.90	16.76	16.60	13.70	34.21	2.90	16	11	F
29.39	21.18	M18x1.0-6H	12.80	16.76	18.15	16.80	37.95	2.90	20	13	H
32.49	25.14	M22x1.0-6H	16.00	16.76	19.50	17.90	39.65	2.90	24	15	J
35.71	28.12	M25x1.0-6H	19.20	16.76	21.10	21.20	41.25	2.90	28	17	K
38.50	31.09	M28x1.0-6H	21.40	16.76	22.10	23.20	43.75	2.90	32	19	K
41.70	34.04	M31x1.0-6H	24.60	16.76	23.60	26.20	46.91	2.90	36	21	L
44.91	36.90	M34x1.0-6H	27.70	16.76	25.20	29.40	50.10	2.90	40	23	M
47.98	39.88	M37x1.0-6H	30.90	16.76	26.90	32.60	53.26	1.70	44	25	M

Notes: 1 - Minimum penetration of ØD from front of serrations. 2 - Please note there may be crossover dependent on diameter and pitch. Measurements shown in mm.

EN3660-063 Cable Outlet, Straight, for Heat Shrink Boot, Shielded, Sealed and Self-Locking

Interface Compatible with EN3645

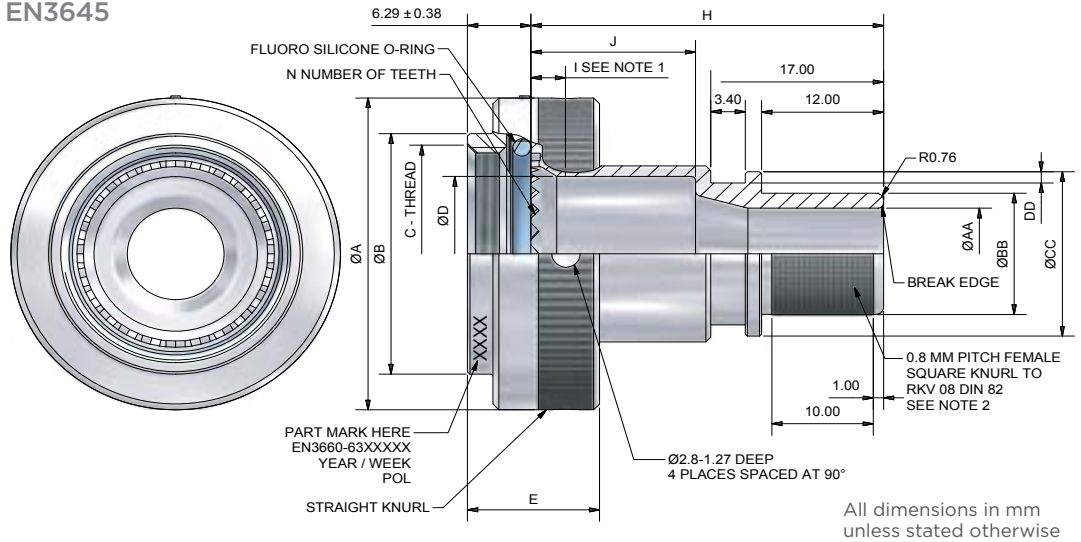


TABLE 1

Class	Material/Finish
F/N	Aluminum/Nickel Plated
K	Stainless Steel/Passivated
W	Aluminum/Olive Drab Cadmium Plated

TABLE 3

Length Code	Wiring Chamber	H Max	J
A		27.1	8.2
B		35.1	16.2
C		40.1	21.2
D		50.1	31.2

TABLE 4

Cable Entry Size Code	AA ± 0.1	BB ± 0.1	CC ± 0.3	DD + 0.2/-0
A	4.7	7.7	12.2	1.12
B	6.4	9.4	14.0	1.12
C	7.9	11.0	15.5	1.12
D	9.5	12.6	17.1	1.12
E	11.1	14.1	18.7	1.12
F	12.7	15.7	20.3	1.12
G	15.9	18.9	23.5	1.12
H	19.1	22.0	26.7	1.12
J	22.2	25.2	29.8	1.75
K	25.5	28.4	33.0	1.75
L	28.6	31.5	36.2	1.75
M	31.8	34.7	39.4	1.75

SERIES ————— **EN3660-063**
CLASS, MATERIAL FINISH (TABLE 1) ————— **W**
SHELL SIZE (TABLE 2) ————— **15**
LENGTH CODE WIRING CHAMBER (TABLE 3) ————— **B**
CABLE ENTRY SIZE CODE (TABLE 4) ————— **D**

TABLE 2

A Max	B Max	C Thread	D Min	E Max	I Min	N	Shell Size	Maximum Entry Size
21.79	15.24	M12x1.0-6H	6.70	16.76	2.90	12	09	D
24.99	18.21	M15x1.0-6H	9.90	16.76	2.90	16	11	F
29.39	21.18	M18x1.0-6H	12.80	16.76	2.90	20	13	H
32.49	25.14	M22x1.0-6H	16.00	16.76	2.90	24	15	J
35.71	28.12	M25x1.0-6H	19.20	16.76	2.90	28	17	K
38.50	31.09	M28x1.0-6H	21.40	16.76	2.90	32	19	K
41.70	34.04	M31x1.0-6H	24.60	16.76	2.90	36	21	L
44.91	36.90	M34x1.0-6H	27.70	16.76	2.90	40	23	M
47.98	39.88	M37x1.0-6H	30.90	16.76	1.70	44	25	M

Notes: 1 - Minimum penetration of ØD from front of serrations. 2 - Please note there may be crossover dependent on diameter and pitch. Measurements shown in mm.

EN3660-064 Cable Outlet, Straight, for Heat Shrink Boot, Shielded, Sealed and Self-Locking

Interface Compatible with EN3645

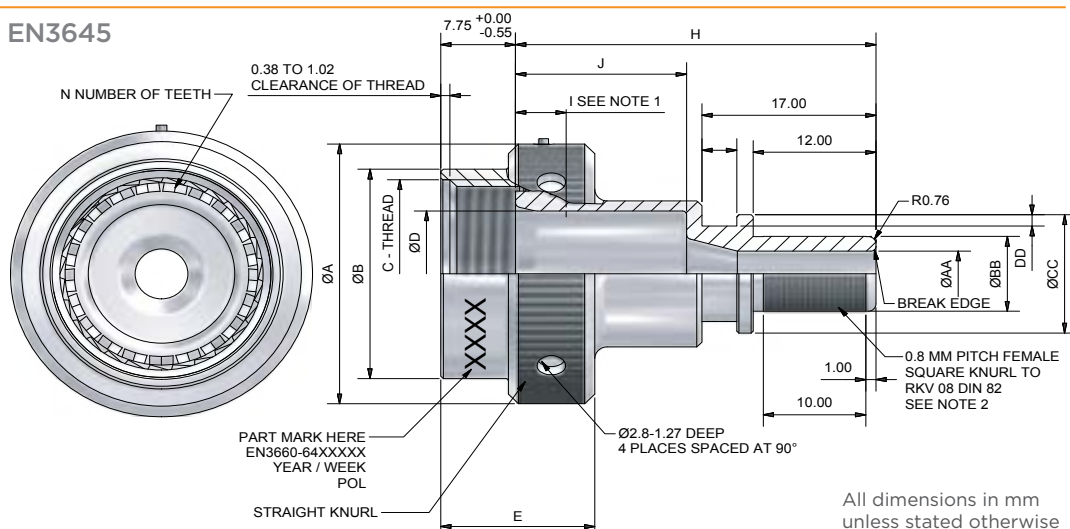


TABLE 1

Class	Material/Finish
F	Aluminum/Nickel Plated
K	Stainless Steel/Passivated
KE	Stainless Steel/Passivated
W	Aluminum/Olive Drab Cadmium Plated

STAINLESS STEEL VERSION




TABLE 3

Length Code Wiring Chamber	H Max	J
A	27.5	8.57
B	35.5	16.57
C	40.5	21.6
D	50.5	31.6

TABLE 4

Cable Entry Size Code	AA ± 0.1	BB ± 0.1	CC ± 0.3	DD + 0.2/-0
A	4.7	7.7	12.2	1.12
B	6.4	9.4	14.0	1.12
C	7.9	11.0	15.5	1.12
D	9.5	12.6	17.1	1.12
E	11.1	14.1	18.7	1.12
F	12.7	15.7	20.3	1.12
G	15.9	18.9	23.5	1.12
H	19.1	22.0	26.7	1.12
J	22.2	25.2	29.8	1.75
K	25.5	28.4	33.0	1.75
L	28.6	31.5	36.2	1.75
M	31.8	34.7	39.4	1.75

SERIES **EN3660-064**

CLASS, MATERIAL FINISH (TABLE 1) **W**

SHELL SIZE (TABLE 2) **10**

LENGTH CODE WIRING CHAMBER (TABLE 3) **B**

CABLE ENTRY SIZE CODE (TABLE 4) **B**


TABLE 2

Shell Size	A Max	B Max	C Thread	D + 0/-0.25	D2 + 0/-0.25	E Max	I Min	N	Maximum Entry Size
08	22.48	15.67	1/2-20 UNF	6.86	6.68 see note 3	15.30	4.95	12	B
10	25.65	18.64	5/8-24 UNEF	9.53	9.35 see note 3	15.30	4.95	15	D
12	28.83	21.79	3/4-20 UNEF	12.98	12.62 see note 3	15.30	4.95	21	F
14	32.00	24.99	7/8-20 UNEF	14.86	14.86	15.30	4.95	24	G
16	35.18	28.24	1-20 UNEF	18.03	17.73 see note 3	15.30	4.95	30	H
18	38.55	30.94	1 1/16-18 UNEF	20.04	20.04	15.30	4.95	33	H
20	41.53	34.16	1 3/16-18 UNEF	23.22	23.22	15.30	4.95	36	J
22	44.70	37.29	1 5/16-18 UNEF	26.39	26.39	15.30	4.95	39	K
24	47.89	40.46	1 7/16-18 UNEF	29.31	29.31	15.30	4.95	42	L
28	54.23	49.45	1 3/4-18 UNS	35.28	35.28	15.30	4.95	54	M

Notes: 1 - Minimum penetration of ØD from front of serrations. 2 - Please note there may be crossover dependent on diameter and pitch. Measurements shown in mm.
3 - Apply tolerance +0.18/-0

EN3660-065 Cable Outlet, 90°, for Heat Shrink Boot, Shielded, Sealed and Self-Locking

Interface Compatible with EN2997

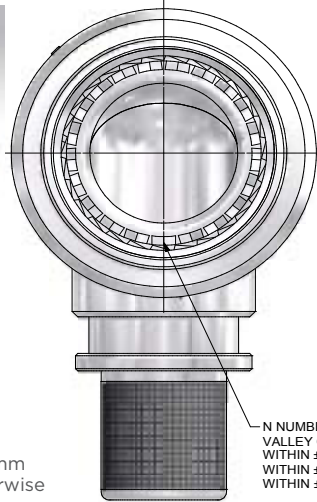

All dimensions in mm unless stated otherwise

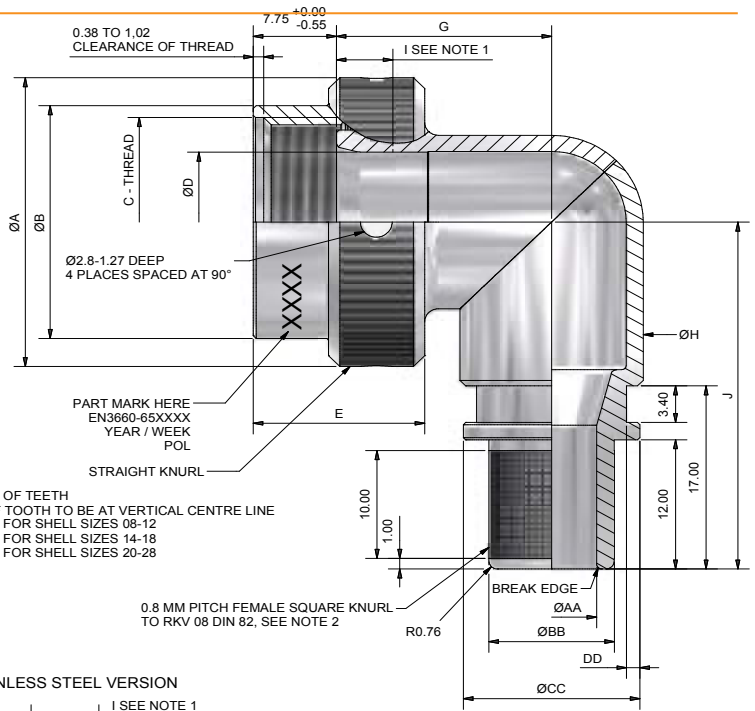


TABLE 1

Class	Material/Finish
F	Aluminum/Nickel Plated
K	Stainless Steel/Passivated
KE	Stainless Steel/Passivated
W	Aluminum/Olive Drab Cadmium Plated

EN3660-065

W

10

B

SERIES

CLASS, MATERIAL FINISH (TABLE 1)

SHELL SIZE (TABLE 2)

CABLE ENTRY SIZE CODE (TABLE 4)




TABLE 4

Cable Entry Size Code	AA ± 0.1	BB ± 0.1	CC ± 0.3	DD + 0.2/-0
A	4.7	7.7	12.2	1.12
B	6.4	9.4	14.0	1.12
C	7.9	11.0	15.5	1.12
D	9.5	12.6	17.1	1.12
E	11.1	14.1	18.7	1.12
F	12.7	15.7	20.3	1.12
G	15.9	18.9	23.5	1.12
H	19.1	22.0	26.7	1.12
J	22.2	25.2	29.8	1.75
K	25.5	28.4	33.0	1.75
L	28.6	31.5	36.2	1.75
M	31.8	34.7	39.4	1.75


TABLE 2

Shell Size	A Max	B Max	C Thread	D + 0/-0.25	D2 + 0/-0.25	E Max	G Max	H Max	J Max	I Min	N	Maximum Entry Size
08	22.48	15.67	1/2-20 UNF	6.86	6.68 see note 3	15.30	16.10	10.20	31.05	4.95	12	B
10	25.65	18.64	5/8-24 UNEF	9.53	9.35 see note 3	15.30	17.90	13.70	34.21	4.95	15	D
12	28.83	21.79	3/4-20 UNEF	12.98	12.62 see note 3	15.30	19.40	16.80	37.95	4.95	21	F
14	32.00	24.99	7/8-20 UNEF	14.86	14.86	15.30	20.00	17.90	39.65	4.95	24	G
16	35.18	28.24	1-20 UNEF	18.03	17.73 see note 3	15.30	21.60	21.20	41.25	4.95	30	H
18	38.55	30.94	1 1/16-18 UNEF	20.04	20.04	15.30	22.60	23.20	43.75	4.95	33	H
20	41.53	34.16	1 3/16-18 UNEF	23.22	23.22	15.30	24.10	26.20	46.91	4.95	36	J
22	44.70	37.29	1 5/16-18 UNEF	26.39	26.39	15.30	25.70	29.40	50.10	4.95	39	K
24	47.89	40.46	1 7/16-18 UNEF	29.31	29.31	15.30	27.40	32.60	53.29	4.95	42	L
28	54.23	49.45	1 3/4-18 UNS	35.28	35.28	15.30	30.90	39.60	56.46	4.95	54	M


Notes: 1 - Minimum penetration of ØD or ØD2 from front of serrations. 2 - Please note there may be crossover dependent on diameter and pitch. 3 - Apply tolerance of +0, 18/-0. Measurements shown in mm.

EN3660-033 Stainless Steel Screen Termination Band



EN3660-033AF - FLAT
EN3660-033AC - PRE-COILED
ONE-STEP
STANDARD BAND



EN3660-033CF - FLAT
EN3660-033CC - PRE-COILED
ONE-STEP
MICRO BAND



EN3660-033DF - FLAT
EN3660-033DC - PRE-COILED
EXTENDED ONE-STEP
MICRO BAND

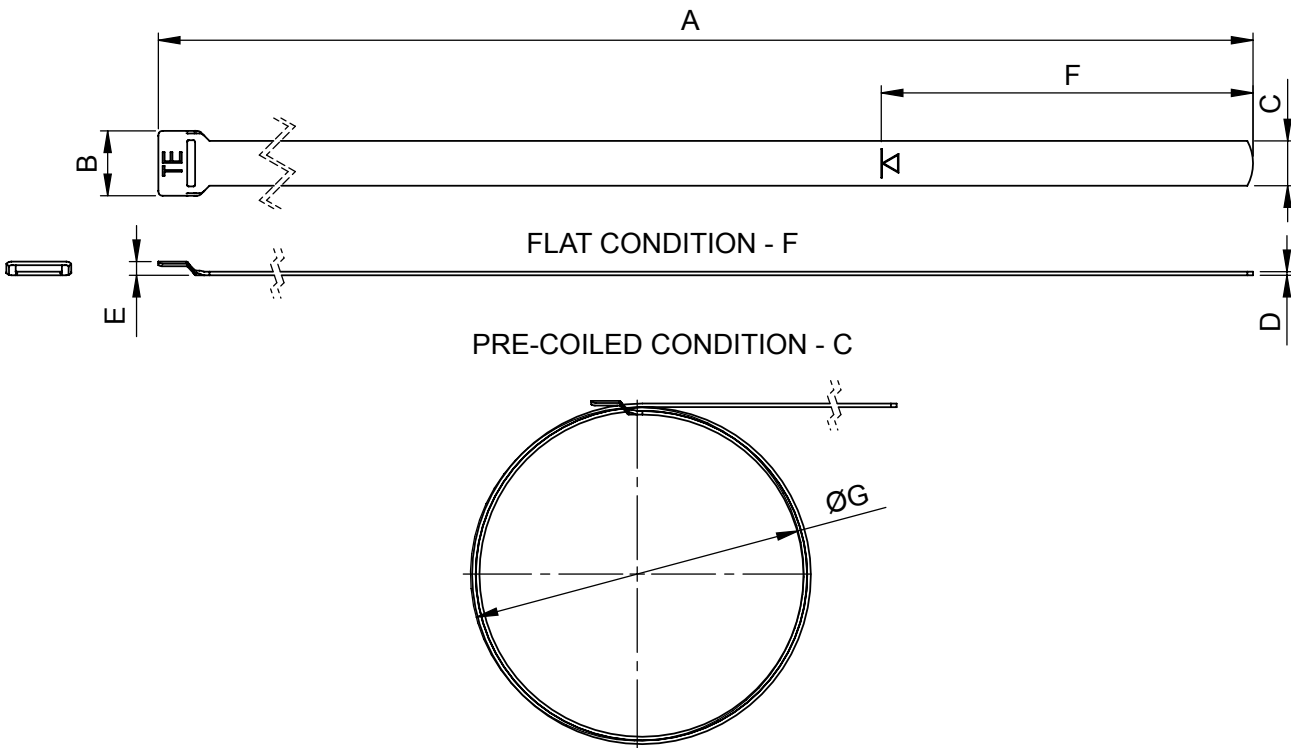

Variant	A	B ± 0.76	C ± 0.25	D ± 0.08	E ± 0.38	F Ref	ØG Max	Mass/100 [g] Max	Tool Req.
A	360.42 363.47	8.89	6.22	0.48	1.88	52.00	47.80	1060	M81306/1-01
B	204.72 207.77	4.95	2.92	0.38	1.35	52.00	22.40	250	M81306/1-02
C	360.42 363.47	4.95	2.92	0.38	1.35	52.00	47.80	425	M81306/1-02

Measurements shown in mm

Notes

Empower Engineers to Solve Problems, Moving the World Forward.

AMP | AGASTAT | CII | DEUTSCH | DRI | HARTMAN | KILOVAC
MICRODOT | NANONICS | POLAMCO | Raychem | SEACON

CONNECT WITH US

We make it easy to connect with our experts and are ready to provide all the support you need. Visit te.com/support to chat with a Product Information Specialist.

te.com/en3660-backshells

AMP, AGASTAT, CII, DEUTSCH, DRI, HARTMAN, KILOVAC, MICRODOT, NANONICS, POLAMCO, Raychem, Rochester, SEACON, TE, TE Connectivity, and TE connectivity (logo) are trademarks owned or licensed by TE Connectivity. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2023 TE Connectivity All Rights Reserved.

2432671-1 09/23

EN3660 QUALIFIED BACKSHELLS

TE Connectivity
Aerospace, Defense & Marine
2900 Fulling Mill Road
Middletown, PA 17057