

THIS DRAWING IS UNPUBLISHED.




RELEASED FOR PUBLICATION

© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00						
			B	REVISED PER ECO-14-011808	09AUG2014	AP	SB

1. CONNECTOR ACCEPTS SIZE 20 DF PIN CONTACTS, RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
2. CONNECTOR COMPLIES WITH AMP SPEC. 108-40005 WHERE APPLICABLE.

- 3 MATERIAL:
MOLDED PARTS: GLASS-FILLED PBT OR GLASS-FILLED NYLON,
UL94V-0 RATED. COLOR: BLACK
SHELLS: STEEL.
- 4 FINISH:
SHELLS: ZINC PLATED .000200-.000400 THICK, YELLOW CHROMATE COATING.

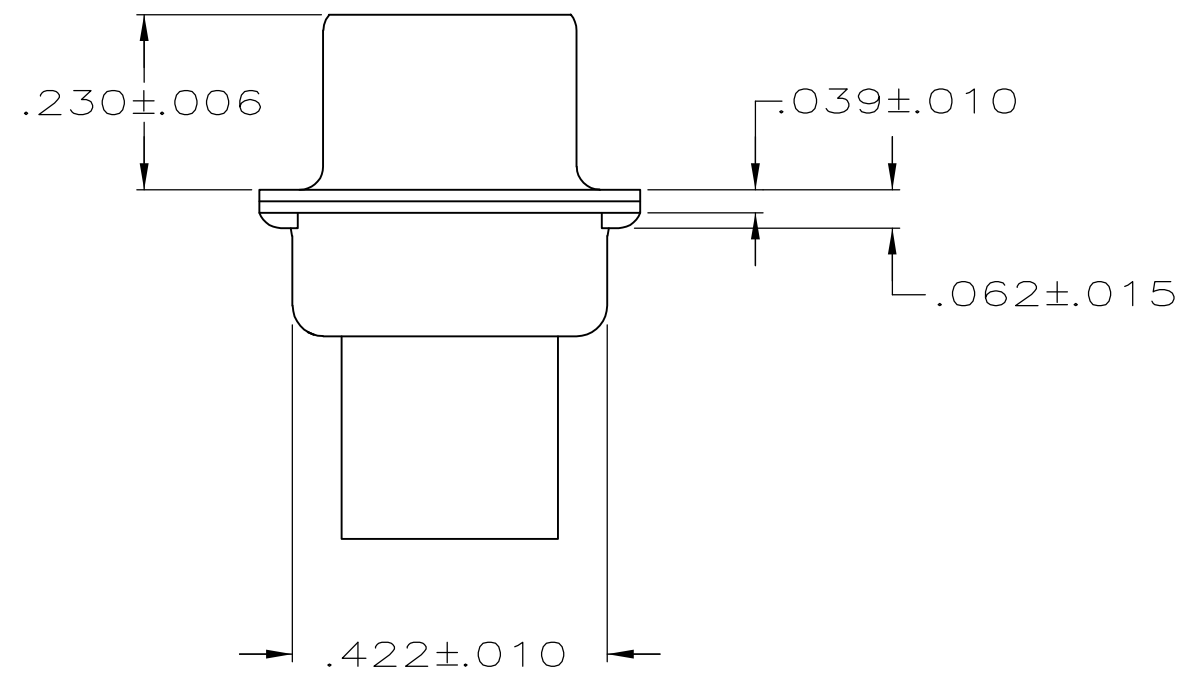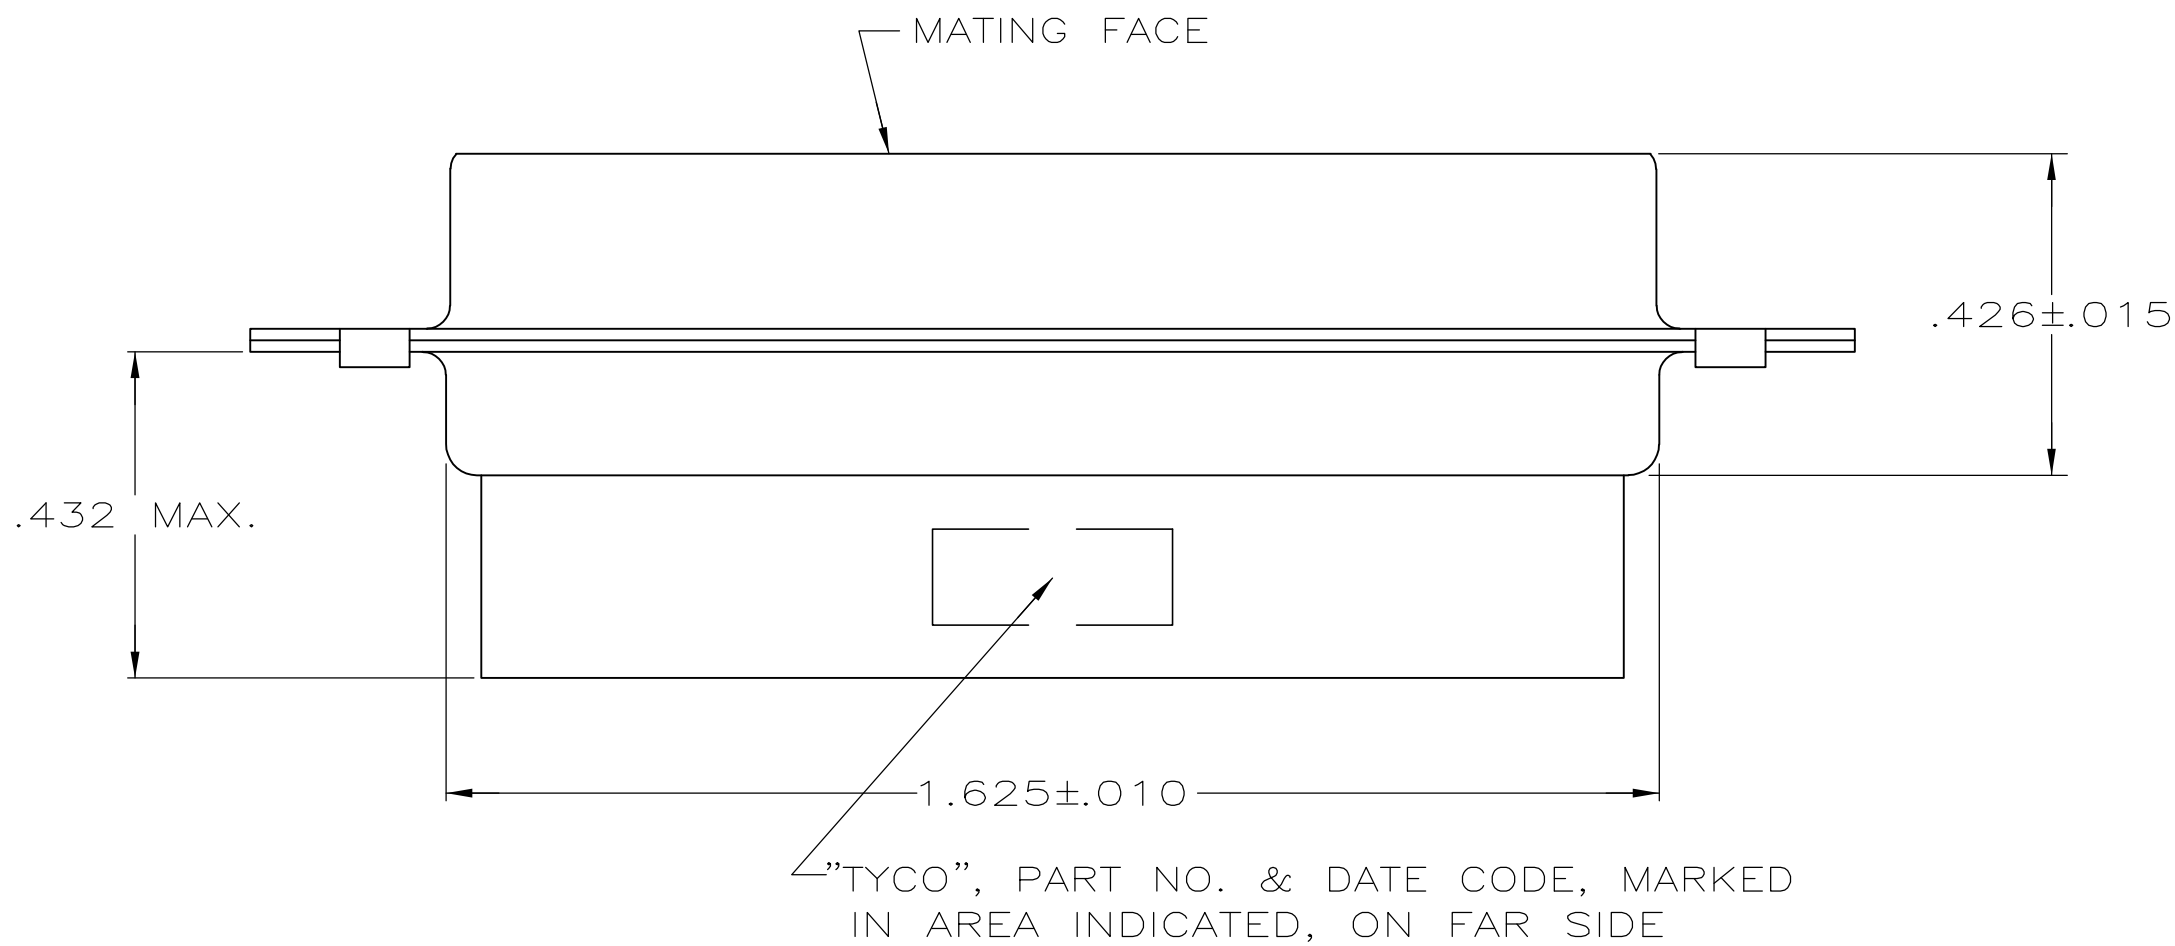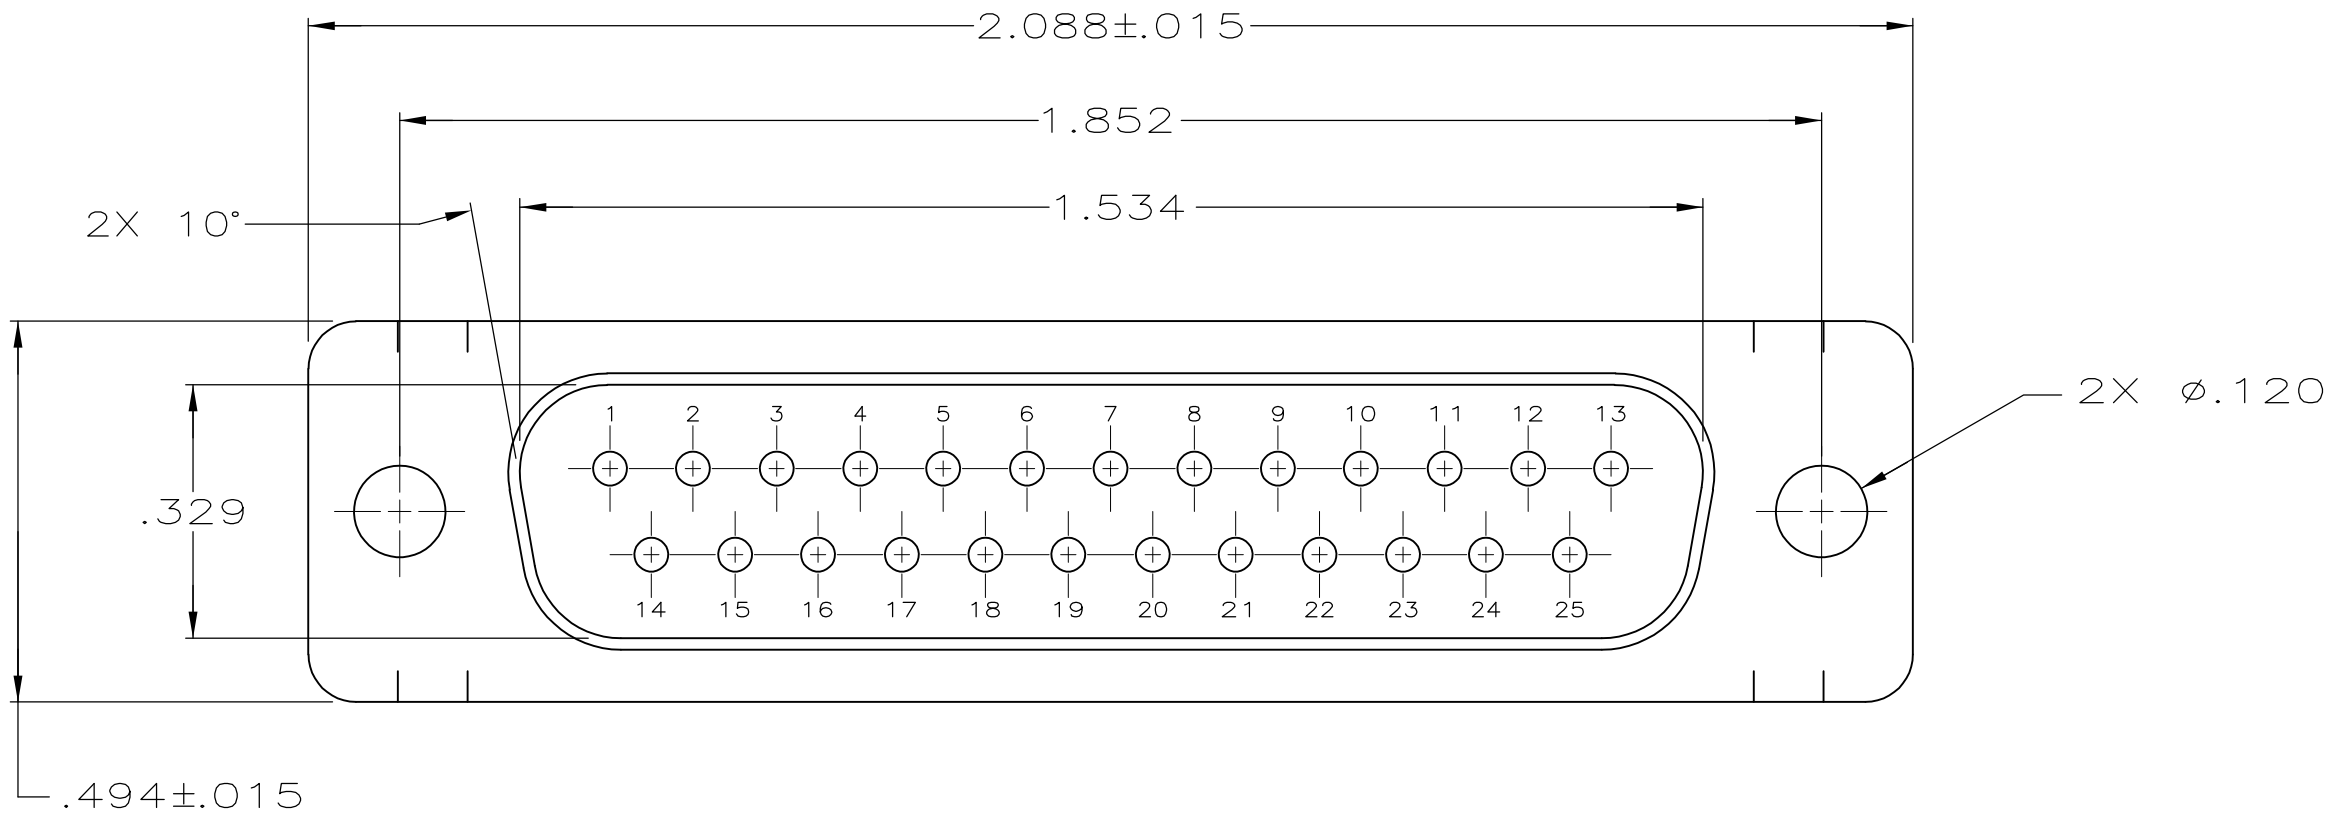

**COPYRIGHT 2005
TYCO ELECTRONICS CORP
ALL RIGHTS RESERVED**

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. MCMASTER 08SEP05	 TE Connectivity				
DIMENSIONS: INCHES		CHK C. ROHDE 08SEP05					
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± 2°	APVD M. WALMSLEY 08SEP05	NAME PLUG CONNECTOR, SIZE 3, 25 POS., AMPLIMITE HDP				
		PRODUCT SPEC —					
		MATERIAL	FINISH	APPLICATION SPEC —	SIZE	CAGE CODE	DRAWING NO
		WEIGHT —	A2	00779	C=5205208	—	
CUSTOMER DRAWING					SCALE NTS	SHEET 1 of 1	REV B