© – TE Connectivity. All Rights Reserved.

| REVISIONS | | | | | |
|---|---|---|---|---|---|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | A4 | REVISED AS PER ECR-23-169440 | 19APR2023 | JK | WH |

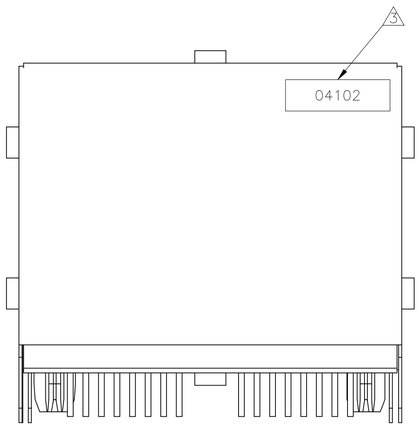


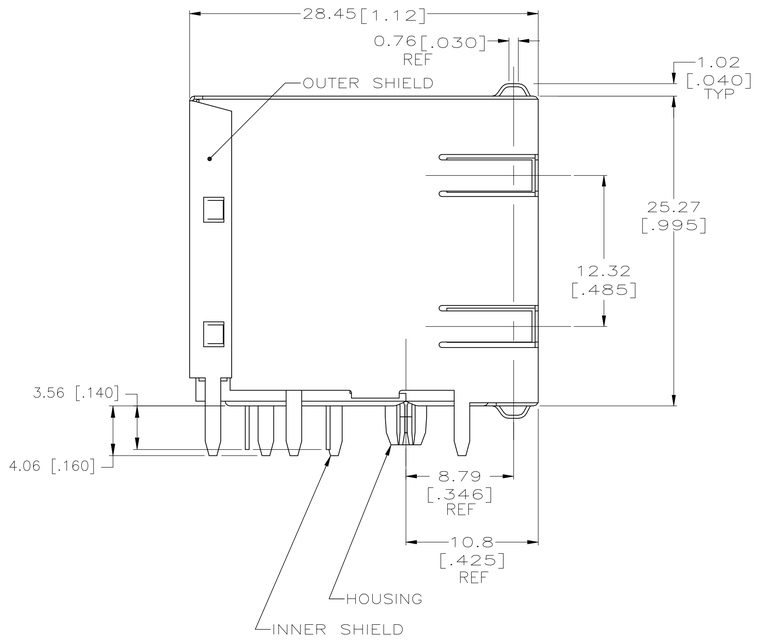


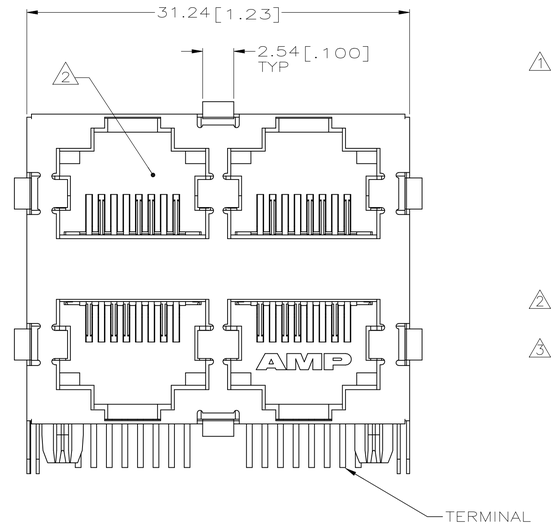


1. MATERIAL:
HOUSING – PCT POLYESTER, BLACK, UL94V–0.
OVERMOLDED TERMINAL ARRAY – PBT, BROWN.
TERMINALS – 0.33 [.013] THICK PHOS BRONZE PLATED WITH 1.27um [.000050] MIN THICK HARD GOLD IN LOCALIZED AREA AND 3.81um [.000150] MIN THICK MATTE TIN IN SOLDER AREA OVER 1.27um [.000050] MIN THICK NICKEL UNDERPLATE.
OUTER SHIELD AND INNER SHIELD – 0.25 [.010] THICK COPPER ALLOY PLATED WITH 1.27 um [.000050] MINMUM NICKELAND 2.03 um [.000080] MINIMUM HOT TIN DIP ON PCB GROUND TABS.

2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.

3. DATE CODE LOCATED ON REAR OF PART APPROXIMATELY AS SHOWN:
FIRST 2 DIGITS ARE LAST 2 DIGITS OF YEAR,
SECOND 2 DIGITS ARE MANUFACTURING WORK WEEK,
LAST DIGIT IS DAY OF WEEK, WITH SUNDAY = 1.

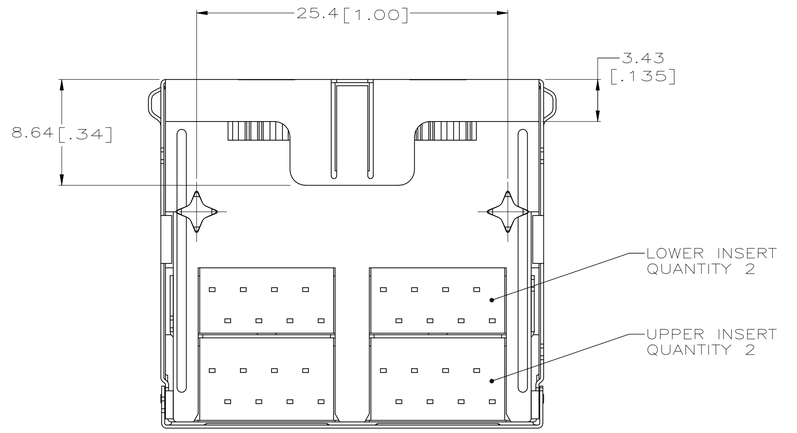


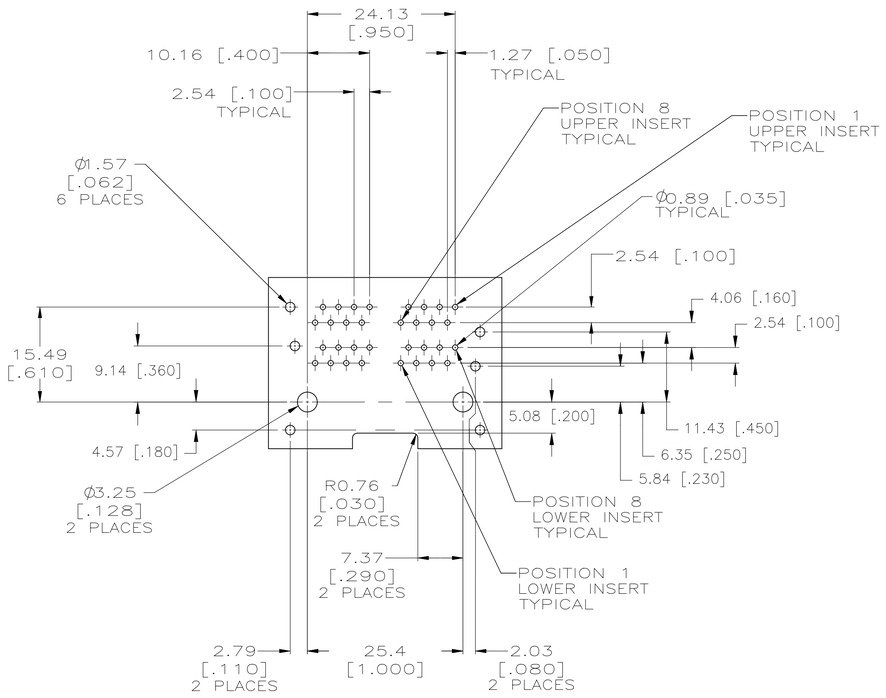


PC BOARD LAYOUT VIEWED FROM COMPONENT SIDE
SCALE 2:1

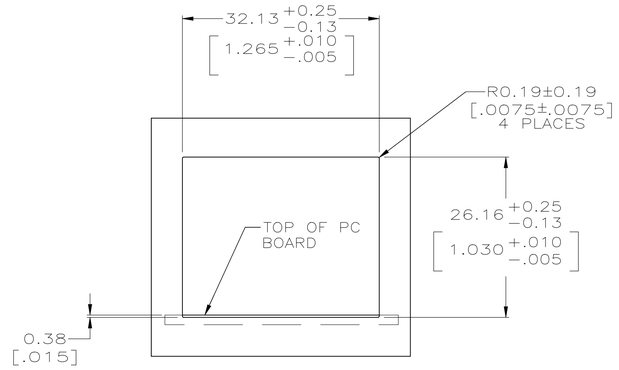


SUGGESTED PANEL CUTOUT DIMENSIONS
SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.25[.01]
3 PLC ± 0.13[.005]
4 PLC ± –
ANGLES ± –

MATERIAL ⚠1

FINISH ⚠1

DWN 15JUN2005 A. FERNANDEZ-DOCK5
CHK 15JUN2005 J. WESTMAN
APVD 15JUN2005 S. FLICKINGER

PRODUCT SPEC 108-1163-2
APPLICATION SPEC 114-2048
WEIGHT 0.000000

TE Connectivity

NAME
STACKED MODULAR JACK ASSEMBLY, 2x2 PORT, 8 POSITION, SHIELDED, PANEL GROUND, CATEGORY 5

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A1 | 00779 | C-5569260 | – |

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV A4

5569260-1
PART NUMBER