


REVISIONS			
REV	DESCRIPTIONS	DATE	APPROVED
N/C	NEW RELEASE PER E.O.H4106	9/22/04	F.B.

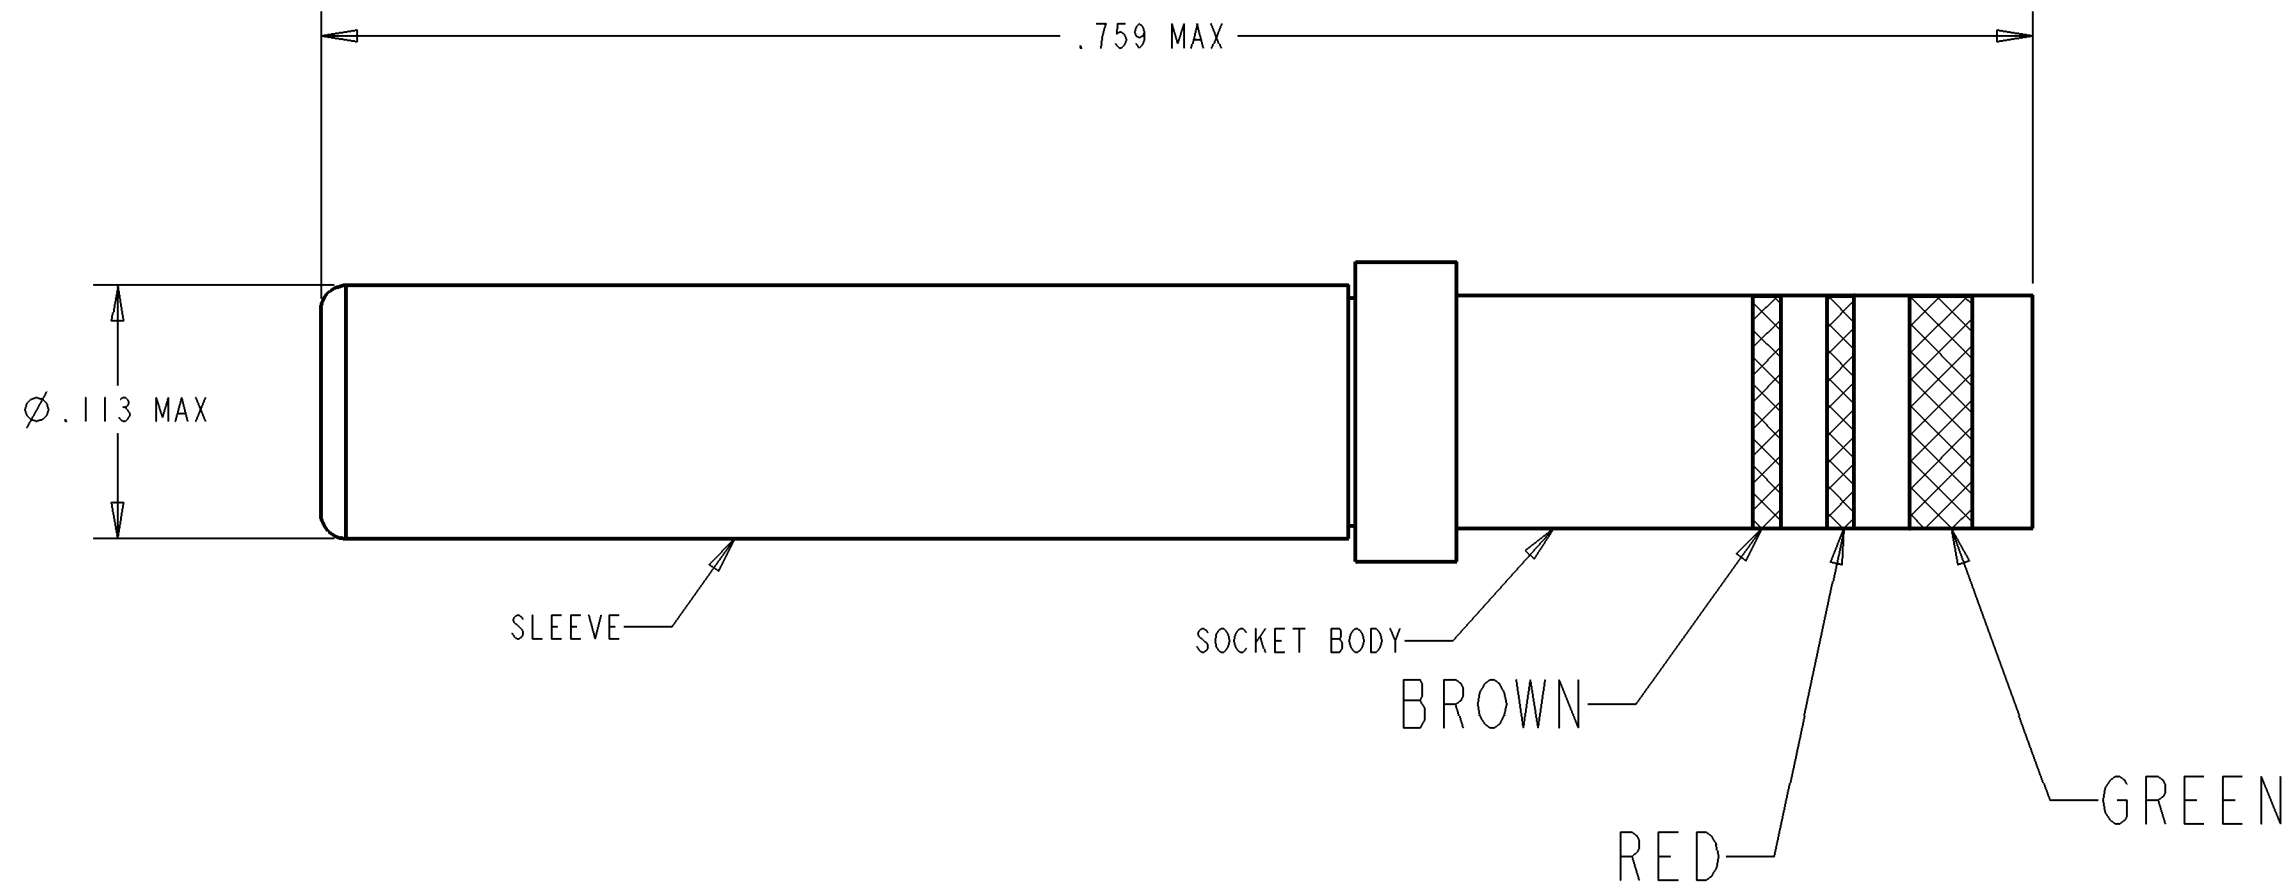

1. DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
2. MATING CONTACT PIN: M39029/9-516
3. REFERENCE TOOLS:

CRIMPING TOOL - M22520/1-01

POSITIONER - M22520/1-02

INSTALL/REMOVAL TOOL - M81969/14-03
4. WIRE GAGE RANGE: AWG 16 & 18
5. STRIP LENGTH: .250±.020

NOTE(S):

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES DECIMALS XXX ± .005 ANGLES ± .5° T.I.R. .010 PARTS TO HAVE NO BURRS OR SHARP EDGES		SIGNATURE & DATE		CONTACT, SOCKET SIZE 16 REMOVABLE CRIMP THERMOCOUPLE ALUMEL M39029/10-521 ENVELOPE		CP		MATL CODE 73		
		DR	S.LUI 9/22/04			DEUTSCH ENGINEERED INTERCONNECT SOLUTIONS  250 Eddie Jones Way Oceanside, CA 92054				
		CHK	F.BAUTISTA 9/22/04							
		PE	M.ALLEN 9/22/04							
MATERIAL						B	7362-225-1601			
ALUMEL SOCKET BODY STAINLESS STEEL SLEEVE										
FINISH		APPD	M.ALLEN 9/22/04			DWG SIZE	CAGE CODE 11139		SHEET 1 OF 1	
UNPLATED		SCALE:								