

# Virtual Sample Kit

## Power Versa-Lock Connectors



TE Connectivity's Power Versa-Lock connector system is a high-performance, wire-to-wire power solution featuring perimeter and wire seals that deliver IP67 rated protection against water and dust. These locking connectors offer enhanced reliability with four points of contact between tab and receptacle contacts and a mounting clip to reduce movement in applications where panel mounting is not an option. Find out whether Power Versa-Lock connector products meet your connection needs by getting samples from this select group of housings, contacts, and accessories.

Don't see what you are looking for? [Contact us today!](#)

### Applications



Lawn Tools



Washer & Dryer



Air Conditioning Unit



Data and Networking




Automotive








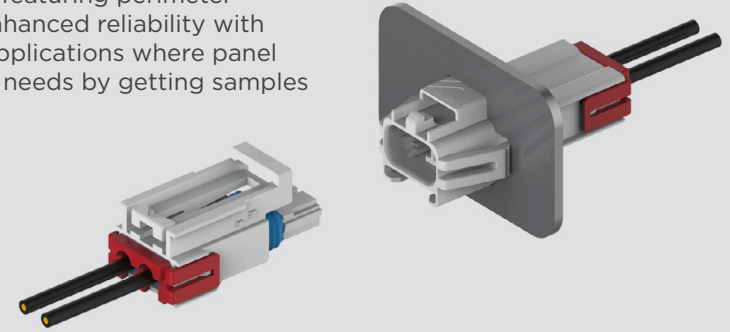












Lighting



Healthcare Devices



CAP HOUSINGS		PLUG HOUSINGS		BACK COVERS		INTERFACE SEALS	
	<b>2P Cap Housing, 1x2 Natural</b> <a href="#">1-2378158-2</a>		<b>2P Plug Housing, 1x2 Natural</b> <a href="#">1-2378159-2</a>		<b>2P Protective Back Cover</b> <a href="#">2334614-2</a>		<b>2P Interface Seal, 1x2 Blue</b> <a href="#">2325347-2</a>
	<b>6P Twist and Lock (TNL) GWT* Cap Housing, 2x3 Blue</b> <a href="#">1-2381608-6</a>		<b>6P GWT* Plug Housing, 2x3 Blue</b> <a href="#">1-2381595-6</a>		<b>3P Protective Back Cover**</b> <a href="#">2334614-3</a>		<b>3P Interface Seal, 1x3 Blue**</b> <a href="#">2325347-3</a>
	<b>9P GWT* Cap Housing, 3x3 Blue</b> <a href="#">1-2370523-9</a>		<b>9P GWT* Plug Housing, 3x3 Blue</b> <a href="#">1-2370527-9</a>				
CONTACTS FOR SEALED CONNECTORS		CONTACTS FOR UNSEALED CONNECTORS		BACK COVERS		GANG WIRE SEALS	
	<b>20-18AWG Tin Plated Copper Alloy Receptacle</b> <a href="#">2329914-1</a>		<b>20-18AWG Tin Plated Copper Alloy Receptacle</b> <a href="#">2329912-1</a>		<b>2P TPA, 1x2 Black</b> <a href="#">2329016-2</a>		<b>2P Gang Wire Seal, 1x2 Blue</b> <a href="#">2325349-2</a>
	<b>20-18AWG Tin Plated Copper Alloy Tab</b> <a href="#">2329908-1</a>		<b>20-18AWG Tin Plated Copper Alloy Tab</b> <a href="#">2329906-1</a>		<b>3P TPA, 1x3 Black**</b> <a href="#">2329016-3</a>		<b>3P Gang Wire Seal, 1x3 Blue**</b> <a href="#">2325349-3</a>

\*For more information on glow wire testing please review the white paper [Glow Wire Testing for the Appliance Industry](#) or visit the [Glow Wire Capable Connectors product page](#).

\*\*Use 2 TPA, back cover, or wire seal devices with 6 position connectors and 3 devices with 9 position connectors

[te.com/power-versa-lock](https://te.com/power-versa-lock)

© 2023 TE Connectivity Ltd. All Rights Reserved.

TE, TE Connectivity, Power Versa-Lock and TE connectivity (logo) are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application. TE Connectivity reserves the right to make any adjustments to the information contained herein at any time without notice. TE Connectivity expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose.

