

RECEPTACLES COMBINING THE AMPLIVAR SPLICE AND THE FASTON QUICK CONNECT

SPECIALLY DESIGNED FOR COMPRESSORS

TE Connectivity's (TE) receptacles combining the AMPLIVAR splice and the FASTON quick connect are designed to simplify magnet wire connections in compressor motor production. This solution combines the interface of a FASTON quick connect with the insulation piercing design of AMPLIVAR splices. The result is a direct connection to magnet wire, eliminating the need for a separate stranded wire terminal connection to input/output devices. This receptacle will help to increase production efficiency and reduce the cost of raw materials by crimping directly to magnet wire, without pre-stripped wire, lead wire, or soldering. The unique wire barrel design, with serrations and burrs, is adaptable to Al (aluminum) magnet wire systems and produces a superior metal-to-metal compression crimp with excellent tensile strength.

ELECTRICAL

- Operating voltage: 240 VAC

MECHANICAL

- Operating Temperature (°C): -40 to +105
- Thermal shock: 25 cycles

MATERIALS

- Contact: copper alloy, tin plated

STANDARDS & SPECIFICATIONS

- UL310
- Product Specification: [114-2152](#)
- Application Specification: [108-2086](#)

KEY FEATURES

- Contact is available for copper and/or aluminum magnet wire
- Compact wire connection with excellent tensile strength for vibration resistance
- High quality, high rate terminations with a statistical process controlled termination process
- Quick connection to hermetic header
- Compression crimp eliminates cold solder points, weld burns and many contaminants
- Capable of crimping up to three magnet wires together (for >3 magnet wire crimping situation, please contact TE engineers for dedicated solutions)

APPLICATIONS



Compressors



Motor windings



Coil connections



Solid wire connections




Transformers



Power supplies


RECEPTACLES COMBINING THE AMPLIVAR SPLICE AND THE FASTON QUICK CONNECT

PRODUCT DIMENSIONS

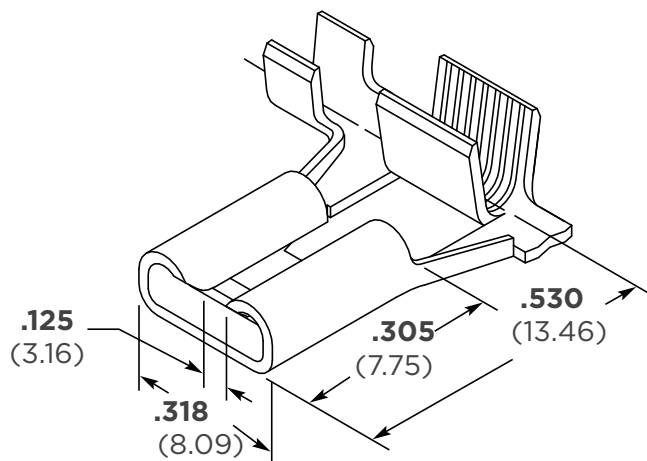

PRODUCT OFFERING

Magnet Wire Range (CMA)	Mating Area	Part Number	Applicator Part Number
500-1900	6.35x0.81	1742881-1	2150450-1
1000-2700	6.35x0.81	1742882-1	2150460-1
1500-4220	6.35x0.81	1742977-1	2150448-1
4000-8500	6.35x0.81	1742979-1	2150449-1

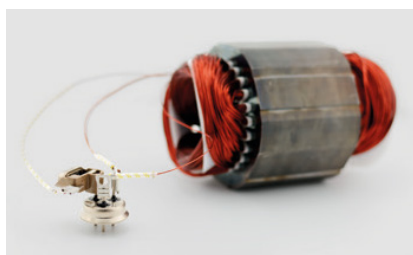

Connect With Us

We make it easy to connect with our experts and are ready to provide all the support you need. Visit te.com/support to chat with a Product Information Specialist.

te.com/amplivar

TE Connectivity, TE, TE connectivity (logo), EVERY CONNECTION COUNTS, AMPLIVAR and FASTON are trademarks owned or licensed by the TE Connectivity plc family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners. .

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

© 2025 TE Connectivity. All Rights Reserved.

Published 07-25