


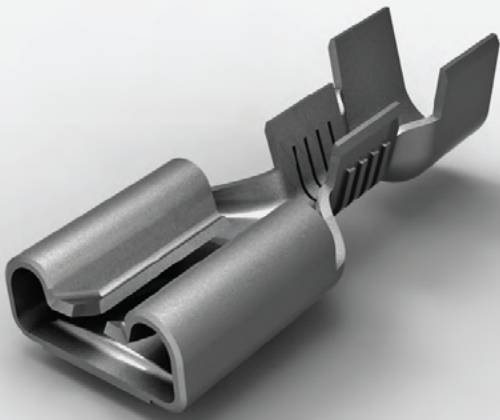

INTRODUCING **LOW INSERTION FORCE FASTON TERMINALS**

TE Connectivity (TE)'s FASTON terminals and connectors have been one of the industry leader in the appliance and automotive industries for years. TE continues to reinvent the FASTON terminal product line to meet the changing trends in these industries. We have seen the need for terminals with lower insertion forces for improved ergonomics so TE is proud to introduce several products specifically designed to meet these applications. These latest products come with the same strong engineering support and high quality that TE has provided for over 50 years.

LOW INSERTION FORCE FASTON TERMINALS

HIGH TEMPERATURE LOW INSERTION FORCE RECEPTACLES

- Nickel plated steel terminals
- “Dog bone” design allows tab to slide on rolled edges
- Terminals rated up to 250°C. Housings on pre-insulated Ultra-Pod rated up to 150°C
- Can be used with high temperature FASTON housings
- UL recognized



Straight Terminal



Flag Terminal



Ultra-Pod Terminal

Part Number	Mating Interface (in/mm)	Orientation	Wire AWG	Insulation Diameter (in/mm)	Stock Thickness (in/mm)	Pre-Insulated Ultra-Pod	Max. Insertion Force (lbs)
1742198-1	.250 x .032 [6.35 x 0.81]	Straight	18 - 14	.120 - .170 [3.05 - 4.32]	.016 [.41]	No	12
1742883-1	.187 x .032 [4.75 x 0.81]	Straight	20 - 16	.090 - .130 [2.29 - 3.30]	.012 [.31]	No	8
1742899-1	.187 x .032 [4.75 x 0.81]	Straight	18 - 16, 2 (18)	.105 - .210 [2.67 - 5.33]	.012 [.31]	No	8
1742841-1	.187 x .020 [4.75 x 0.51]	Straight	20 - 16	.090 - .130 [2.29 - 3.30]	.012 [.31]	No	8
1742543-1	.250 x .032 [6.35 x 0.81]	Flag	18 - 12	.110 - .210 [2.79 - 5.33]	.016 [.41]	No	12
2238041-1	.187 x .032 [4.75 x 0.81]	Flag	20 - 16	.110 - .179 [2.79 - 4.32]	.013 [.33]	No	8

BRASS LOW INSERTION FORCE RECEPTACLES

- Brass and tin plated brass terminals
- .250" x .032" mating interface (6.35mm x 0.81mm)
- Stock thickness 0.16" (0.41mm)
- Redesign of the budget style terminal
- Max insertion force ≤ 6 lbs
- Ultra-Pod receptacles use a V-0, 130°C raw material



Straight Terminal



Flag Terminal



Ultra-Pod Terminal

Part Number	Material / Finish	Orientation	Wire AWG	Insulation Diameter (in/mm)	Pre-Insulated Ultra-Pod
2238196-3	Tin plated brass	Straight	18 - 14	.120 - .170 [3.05 - 4.32]	No
1-1969529-1	Brass	Straight	18 - 14	.110 - .170 [3.05 - 4.32]	Yes
2238027-3	Brass	Straight	22 - 18	.090 - .130 [2.29 - 3.30]	No
2238027-4	Tin plated brass	Straight	22 - 18	.090 - .130 [2.29 - 3.30]	No
1969161-5	Brass	Straight	22 - 18	.090 - .130 [2.29 - 3.30]	Yes
1742999-1	Brass	Flag	18 - 14	.110 - .160 [2.79 - 4.06]	No
1742999-2	Tin plated brass	Flag	18 - 14	.110 - .160 [2.79 - 4.06]	No

LOW INSERTION FORCE FASTON TERMINALS

FOR MORE INFORMATION

ASK OUR EXPERT ►

te.com/en/products/terminals-splices/quick-disconnects

TE Connectivity, TE, TE connectivity (logo), FASTON and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

© 2025 TE Connectivity. All Rights Reserved

07/25