## LGH

TE Internal #: 2-830611-1

Lead Assembly, 10000 VDC, 16 AWG, Wire-to-Wire, Wire & Cable,

Socket, -55 – 125 °C [-67 – 257 °F], Pre-Terminated to Cable,

Package

View on TE.com >



Connectors > Power Connectors > Circular Power > Circular Power Connectors



Connector Product Type: Lead Assembly

Operating Voltage: 10000 VDC

Wire Size: 16 AWG

Connector System: Wire-to-Wire

Sealable: No

## **Features**

### **Product Type Features**

Product Type reatures	
Connector Product Type	Lead Assembly
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Electrical Characteristics	
Operating Voltage	10000 VDC
Body Features	
Positive Stop Ferrule	Without
Contact Features	
Contact Type	Socket
Termination Features	
Termination Method to Wire & Cable	Pre-Terminated to Cable
Dimensions	
Wire Size	16 AWG
Assembly Length	152.4 mm[6 in]
Usage Conditions	

-55 – 125 °C[-67 – 257 °F]

Operating Temperature Range



## Operation/Application

Shielded	No	
Packaging Features		
Packaging Quantity	20	
Packaging Method	Package	

# **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250)  Candidate List Declared Against: JUNE 2023 (235)  SVHC > Threshold:  Pb (4% in Contact/Component)  Article Safe Usage Statements:  Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Customers Also Bought**




















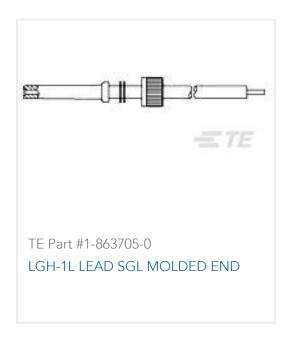



## **Documents**

## **Product Drawings**

LGH 1/2 ELECT MLD END LEAD

English

## **CAD Files**

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_2-830611-1\_AH.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2-830611-1\_AH.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2-830611-1\_AH.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

Lead Assembly, 10000 VDC, 16 AWG, Wire-to-Wire, Wire & Cable, Socket, -55 – 125 ° C [-67 – 257 °F], Pre-Terminated to Cable, Package



1308940\_Sec9\_lghlead

English