ASU103-03PC-HE <

DEUTSCH | DEUTSCH ASU

TE Internal #: ASU103-03PC-HE 3 Position Circular Connector, Wire-to-Wire, Black Zinc, Aluminum Alloy, C Code, Hard Dielectric/Silicone, 22 AWG, 3 Shell Size, DEUTSCH ASU

View on TE.com >



Connectors > Circular Connectors > Standard Circular Connectors



Connector System: Wire-to-Wire Number of Positions: 3 Shell Plating Material: Black Zinc Shell Base Material: Aluminum Alloy Polarization Code: C

Features

Product Type Features

Connector Product Type

Assembly Type

Connector Assembly

Electrical Connector

Connector System	Wire-to-Wire
Circular Connector Type	Receptacle
Shell Type	Metal
Configuration Features	
Factory Installed Backshell	No
Number of Positions	3
Contacts Preloaded	No
Body Features	
Entry Style	Rear Insertion
Environmental Protection	With
Environmental Protection Type	Sealed
Feedthrough Type	No
Shell Plating Material	Black Zinc
Shell Base Material	Aluminum Alloy
Circular Connector Insulation Material Type	Hard Dielectric/Silicone

ASU103-03PC-HE

3 Position Circular Connector, Wire-to-Wire, Black Zinc, Aluminum Alloy, C Code, Hard Dielectric/Silicone, 22 AWG, 3 Shell Size, DEUTSCH ASU



Hermetically Sealed	No
Contact Features	
Contact Quantity (Size 22D)	3
Contact Layout Arrangement	3 – 3
Circular Connector Contact Type	Pin
Mechanical Attachment	
Mating Retention Type	Bayonet Peg
Mating Alignment	With
Polarization Code	С
Mating Alignment Type	Keyed
Mating Retention	With
Housing Features	
Circular Connector Shell Size	3
Dimensions	
Assembly Length	18.2 mm
Wire Size	22 AWG

Usage Conditions

IP Dust Sealing Level	6
IP Water Sealing Level	7
Fluid Resistance	Immersion
Operating Temperature Range	-55 – 170 °C[-67 – 338 °F]
Operation/Application	
Durability Rating	500 Cycles
Other	
Field Serviceable	Yes
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	
	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold

ASU103-03PC-HE

3 Position Circular Connector, Wire-to-Wire, Black Zinc, Aluminum Alloy, C Code, Hard Dielectric/Silicone, 22 AWG, 3 Shell Size, DEUTSCH ASU



 Current ECHA Candidate List: JAN 2025 (247)
Candidate List Declared Against: JAN 2025 (247)
SVHC > Threshold:
Pb (1.2% in Contact)
Pb (1.2% in Contact)
Pb (.4% in Shell)
Article Safe Usage Statements:
Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Not Yet Reviewed for halogen content

Halogen Content

Solder Process Capability

Reflow solder capable to 245°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Also in the Series | DEUTSCH ASU




Customers Also Bought

ASU103-03PC-HE

3 Position Circular Connector, Wire-to-Wire, Black Zinc, Aluminum Alloy, C Code, Hard Dielectric/Silicone, 22 AWG, 3 Shell Size, DEUTSCH ASU



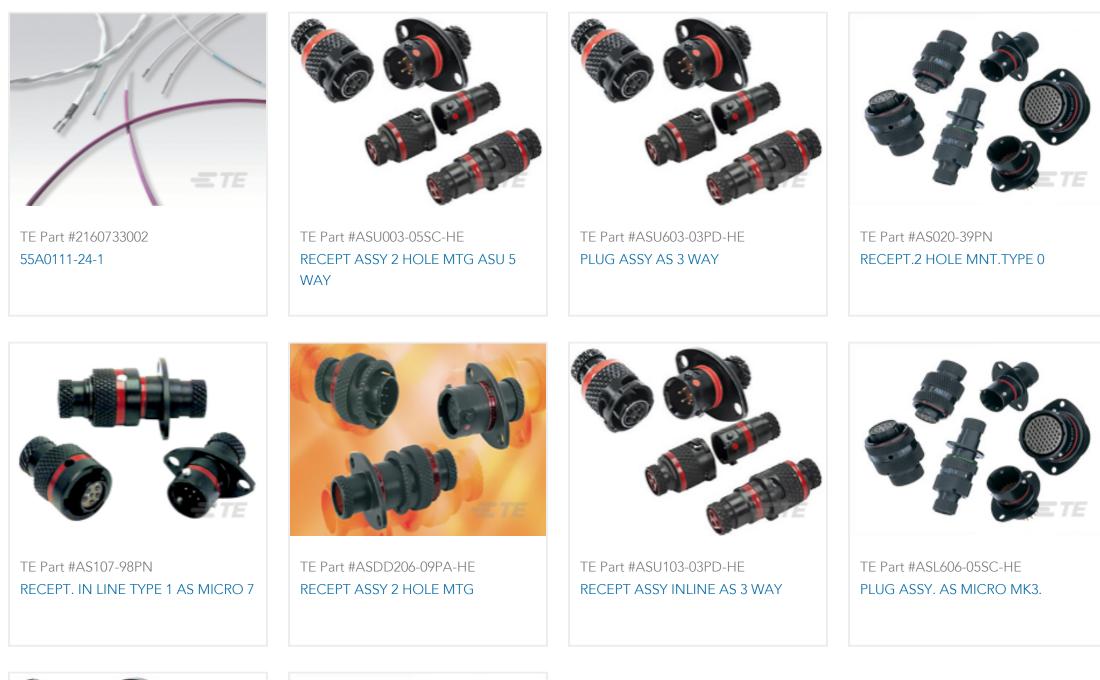



TE Part #ASU003-05SD-HE RECEPT ASSY 2 HOLE MTG ASU 5 WAY



TE Part #AS012-35SA RECEPT.2 HOLE MNT.TYPE 0

Documents

Product Drawings RECEPT ASSY INLINE AS 3 WAY

English

Datasheets & Catalog Pages DEUTSCH Autosport Interconnection Solutions English AS Micro Xtra Lite HE English