


te.com




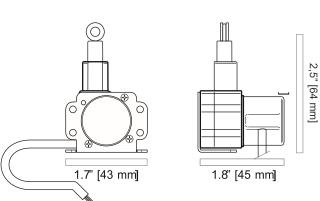

Just like the SM1, the SM2 is the perfect sensing solution when tight space is an issue. With its rugged compact design, handy mounting bracket and a 40-inch electrical cable for easy signal connection, the SM2 is the perfect solution for the OEM and single piece users alike.

At just a little over an inch across, this miniature stringpot offers full stroke measurement ranges from 2½ to 25 inches. A precision plastic hybrid 10K-ohm potentiometer delivers a voltage divider output signal that is linearly proportional to the travel of the spring-loaded measuring cable.

#### **Output Signal:**

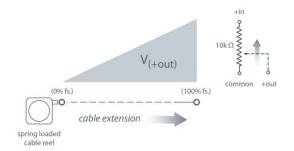

# SM2

# Linear Position to 25 inches (635 mm) Fits In Tight Spaces | Handy Mounting Bracket Polycarbonate Enclosure | Free Release Tolerant

#### **SPECIFICATIONS**

Available Stroke Ranges 2.375, 7.5, 12.5, 25 inches

Output Signal voltage divider (potentiometric)

Accuracy .25% to 1% FS. (See ordering info)

Repeatability .05% FS.

**Resolution** essentially infinite

Measuring Cable .014-inch dia. nylon-coated stainless steel

Maximum Acceleration15 g (retraction)Measuring Cable Tension5.1 oz. (1,4 N) ±30%

Sensor Plastic-hybrid precision potentiometer

Input Resistance 10K ohms, ±10%

Power Rating, Watts 2.0 at 70°F derated to 0 at 250°

 Max Input Voltage
 30 V (AC/DC)

 Sensitivity
 940 ±40 mV/V FS

Cycle Life See ordering information

Electrical Connection 40 inch (1 m), 24 ga. Shielded 3-conductor

cable


Enclosure Glass-filled polycarbonate

Environmental IP 50


Operating Temperature 0° to 160° F (-18° to 70° C)

Weight (not including bracket) 3 oz (90 g)


#### **Electrical Connection:**




## **Mounting Options:**

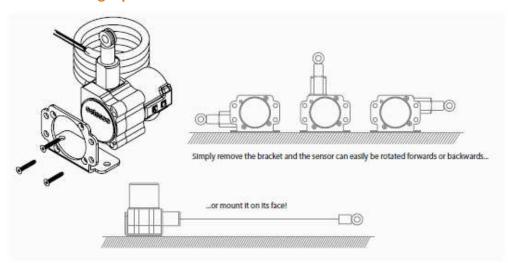


## **Outline Drawing (w/bracket):**

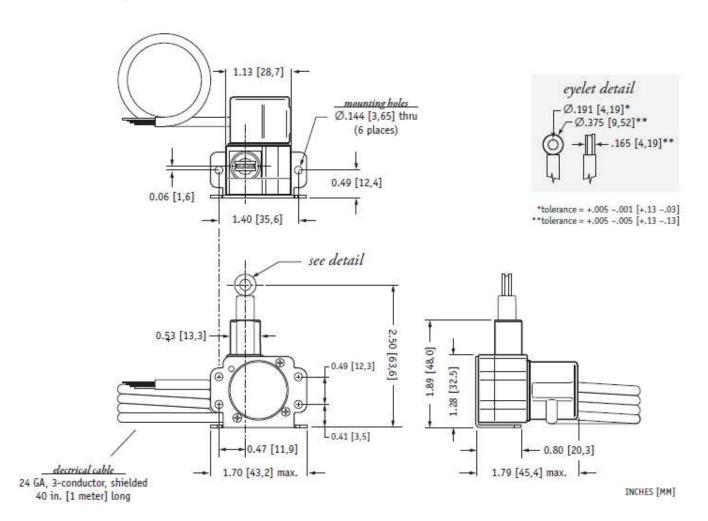

### **Outline Drawing (w/o bracket):**

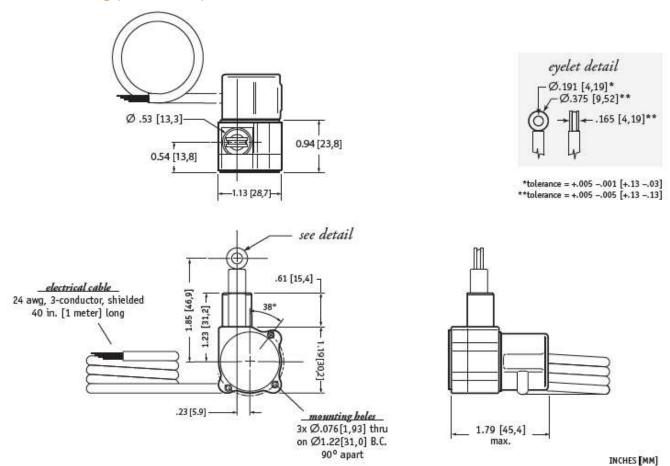

### **Mounting Options Details:**

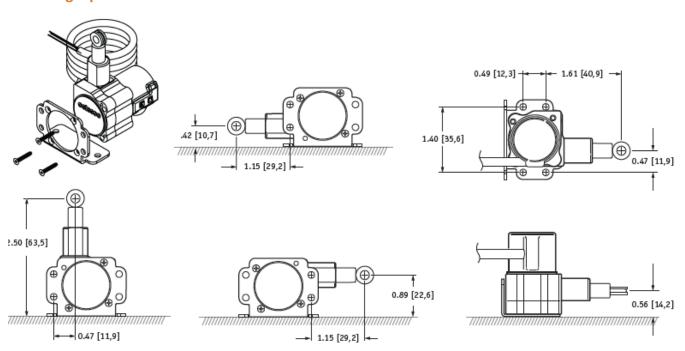

#### **Ordering Information:**



# CLICK HERE > CONNECT WITH A SPECIALIST

**NORTH AMERICA** 

Tel +1 800 522 6752

**EUROPE** 

Tel +31 73 624 6999

ASIA

Tel +86 0400 820 6015

#### te.com/sensors

TE Connectivity, TE, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2021 TE Connectivity Corporation. All Rights Reserved.

Version # 08/2023

