


CDSUX-C Series - Extended Range Buffer Networks *(continued)*

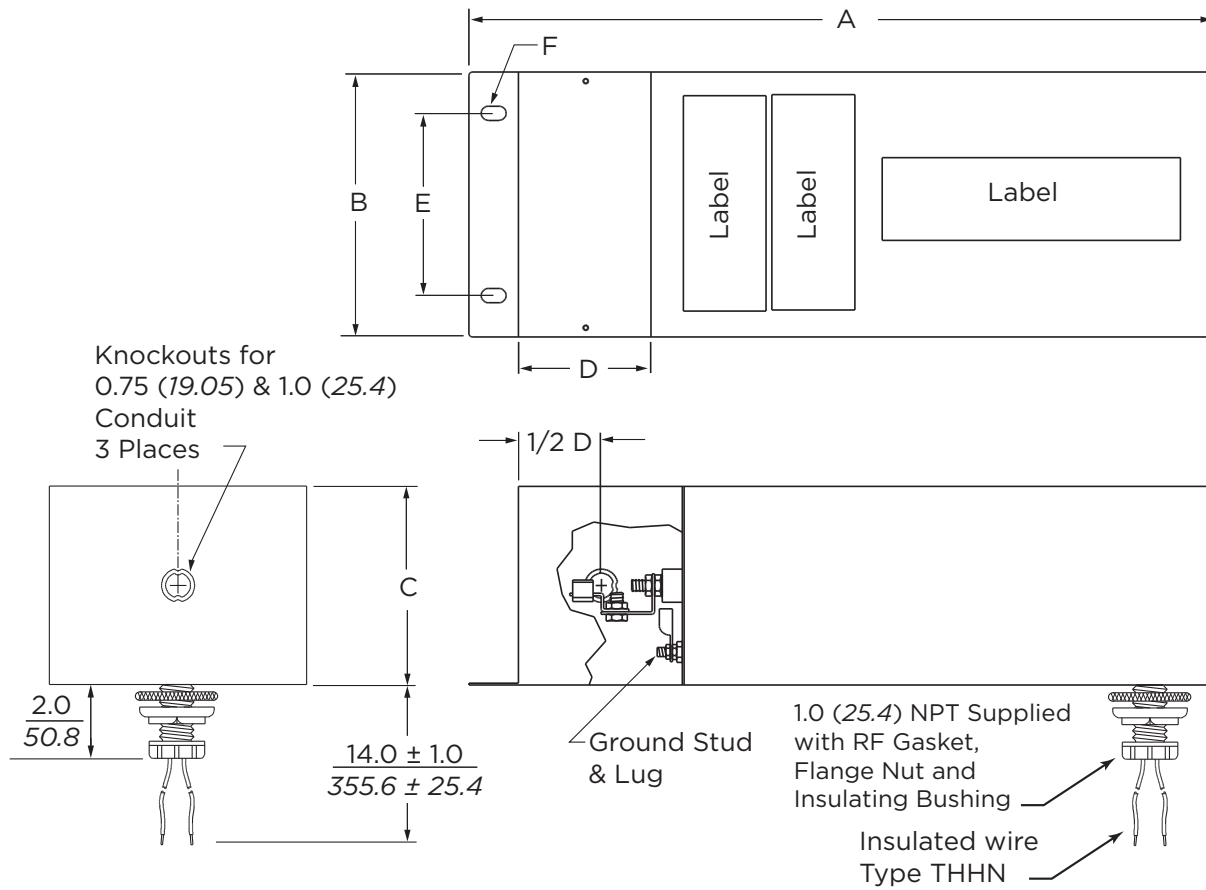

CDSUX	Rated Current	Dimensions						Wire Gauge (AWG/mm ²)	Approx. Weight (Pounds/KG)
		A ±.063 [1.6]	B ±.063 [1.6]	C ±.063 [1.6]	D	E	F		
1010**-C	10A	21.0 <i>533.4</i>	4.0 <i>101.6</i>	5.0 <i>127.0</i>	5.0 <i>127.0</i>	3.0 <i>76.2</i>	.31 x .50 <i>7.87 x 12.7</i>	10 <i>5.26</i>	15 <i>6.80</i>
2010**-C	2 @ 10A	21.0 <i>533.4</i>	8.0 <i>203.2</i>	5.0 <i>127.0</i>	5.0 <i>127.0</i>	5.5 <i>139.7</i>	.43 x .75 <i>10.9 x 19.1</i>	10 <i>5.26</i>	30 <i>13.6</i>
1030**-C	30A	26.0 <i>660.4</i>	6.0 <i>152.4</i>	6.0 <i>152.4</i>	5.0 <i>127.0</i>	4.0 <i>101.6</i>	.31 x .50 <i>7.87 x 12.7</i>	6 <i>13.20</i>	30 <i>13.6</i>
2030**-C	2 @ 30A	26.0 <i>660.4</i>	12.0 <i>304.8</i>	6.0 <i>152.4</i>	5.0 <i>127.0</i>	9.0 <i>228.6</i>	.43 x .75 <i>10.9 x 19.1</i>	6 <i>13.20</i>	60 <i>27.2</i>
1060**-C	60A	32.0 <i>812.8</i>	8.0 <i>203.2</i>	6.0 <i>152.4</i>	6.0 <i>152.4</i>	5.5 <i>139.7</i>	.43 x .75 <i>10.9 x 19.1</i>	6 <i>13.20</i>	60 <i>27.2</i>
1100**-C	100A	34.0 <i>863.6</i>	8.0 <i>203.2</i>	6.0 <i>152.4</i>	8.0 <i>203.2</i>	5.5 <i>139.7</i>	.43 x .75 <i>10.9 x 19.1</i>	2 <i>33.6</i>	70 <i>31.8</i>
1150**-C	150A	41.0 <i>1041.4</i>	10.0 <i>254.0</i>	6.0 <i>152.4</i>	9.0 <i>228.6</i>	9.0 <i>228.6</i>	.43 x .75 <i>10.9 x 19.1</i>	0 <i>53.5</i>	90 <i>40.8</i>
1225**-C	225A	41.0 <i>1041.4</i>	10.0 <i>254.0</i>	6.0 <i>152.4</i>	9.0 <i>228.6</i>	9.0 <i>228.6</i>	.43 x .75 <i>10.9 x 19.1</i>	250 MCM <i>126.0</i>	120 <i>54.4</i>

*400Hz filters available upon request. Will require external power factor correction coil. Please contact TE Connectivity Application Engineering 1-847-573-6517.

Max. Operating Voltage	
A6:	120/208V, 60 Hz
B6:	277/480V, 60 Hz
A4*:	120/208V, 400 Hz