

## 5K3A1 SERIES 1 THERMISTOR

### SPECIFICATIONS

- Thermally conductive epoxy coating
- Ø 2.4 mm Maximum Diameter
- 32 AWG Alloy 180 Leads
- Choice of 4 temperature tolerance classifications
- RoHS Compliant

The BetaCURVE Chip is Soldered to 32 AWG Alloy 180 Leads and Encapsulated in Stycast Epoxy Resin.

### FEATURES

- Interchangeability
- Proven Stability and Reliability.
- Rapid time response.
- Alloy lead wires for reduced thermal conductivity ("stem effect").
- Thermally Conductive Epoxy Coating
- Temperature range -40 °C to +125°C

### APPLICATIONS


- Temperature sensing, control and compensation
- Tight Tolerance Instrumentation
- Assembly into probes for a wide variety of applications
- General Instrumentation applications

## 5K3A1 SERIES 1 THERMISTOR

### PERFORMANCE SPECS

Parameters	Units	Value
Resistance @ +25°C	Ohms	5,000
5K3A1A Resistance tolerance from 0°C to +70°C	°C	± 0.1
5K3A1B Resistance tolerance from 0°C to +70°C	°C	± 0.2
5K3A1C Resistance tolerance from 0°C to +70°C	°C	±0.5
5K3A1D Resistance tolerance from 0°C to +70°C	°C	± 1.0
Alpha Value @ 25°C	%/°C	4.39
Beta Value 25/85	K	3976
Tolerance on Beta Value 25/85	%	± 0.5
Time response in Liquids	Seconds	<1
Dissipation Constant in still air	mW/°C	0.75

### MECHANICAL DETAILS

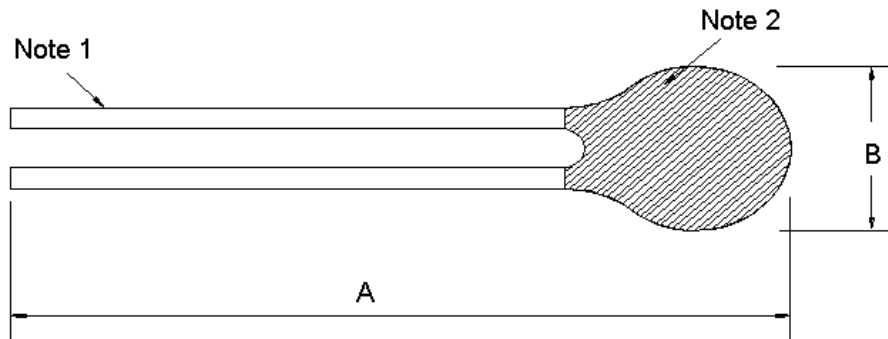

	Dimensions	
	A	B
	76 ± 2mm	2.4mm Max
<b>Note 1</b>	32 AWG Solid Alloy 180 Leads	
<b>Note 2</b>	Orange Stycast 2850ft Epoxy	

## 5K3A1 SERIES 1 THERMISTOR

### RESISTANCE V TEMPERATURE TABLE

Temp °C	Ohms
---------	------

-40	167862
-39	157111
-38	147117
-37	137820
-36	129169
-35	121114
-34	113611
-33	106620
-32	100102
-31	94022
-30	88349
-29	83054
-28	78107
-27	73486
-26	69166
-25	65127
-24	61348
-23	57811
-22	54499
-21	51397
-20	48490
-19	45765
-18	43210
-17	40812
-16	38562
-15	36450
-14	34465
-13	32601
-12	30848
-11	29200
-10	27649
-9	26191
-8	24817
-7	23524
-6	22306
-5	21158
-4	20075
-3	19055
-2	18092
-1	17183
0	16325
1	15515

Temp °C	Ohms
---------	------

2	14750
3	14027
4	13344
5	12698
6	12086
7	11508
8	10961
9	10443
10	9952
11	9487
12	9046
13	8629
14	8233
15	7857
16	7501
17	7162
18	6841
19	6536
20	6247
21	5972
22	5710
23	5461
24	5225
25	5000
26	4786
27	4582
28	4388
29	4204
30	4028
31	3860
32	3701
33	3549
34	3403
35	3265
36	3133
37	3007
38	2887
39	2772
40	2662
41	2558
42	2458
43	2362

Temp °C	Ohms
---------	------

44	2271
45	2183
46	2100
47	2020
48	1944
49	1870
50	1800
51	1733
52	1669
53	1608
54	1549
55	1493
56	1438
57	1387
58	1337
59	1289
60	1244
61	1200
62	1158
63	1117
64	1078
65	1041
66	1005
67	971
68	938
69	906
70	876
71	847
72	818
73	791
74	765
75	740
76	716
77	693
78	670
79	649
80	628
81	608
82	589
83	570
84	553
85	535

Temp °C	Ohms
---------	------

86	519
87	503
88	487
89	472
90	458
91	444
92	431
93	418
94	406
95	394
96	382
97	371
98	360
99	349
100	339
101	330
102	320
103	311
104	302
105	294
106	285
107	277
108	270
109	262
110	255
111	248
112	241
113	235
114	228
115	222
116	216
117	211
118	205
119	200
120	194
121	189
122	184
123	180
124	175
125	170

## 5K3A1 SERIES 1 THERMISTOR

### ORDERING INFORMATION

Part Number	Description	$\Omega$ @25°C	MOQ
5K3A1A	Series 1 Thermistor	5,000	1,000*
5K3A1B	Series 1 Thermistor	5,000	1,000*
5K3A1C	Series 1 Thermistor	5,000	1,000*
5K3A1D	Series 1 Thermistor	5,000	1,000*

\* For quantities less than Minimum Order Quantity – Contact Distribution

#### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity Company  
1711 139th Lane NW  
Andover, MN 55304  
Tel: +1 763 689 4870  
Fax: +1 763 689 5033  
customer care.ando@te.com

#### EUROPE

Measurement Specialties (Europe), Ltd.,  
a TE Connectivity Company  
Ballybrit Business Park  
Galway Ireland  
Tel : +353-91-753238  
Fax : +353-91-770789  
Email: customer care.glwy@te.com

#### ASIA

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
No. 368 Wulian 1st Road  
Gongxing Town  
Shuangliu, Chengdu  
Sichuan, 610200  
China  
Tel: +86 (0) 28 8573 9088  
Fax: +86 (0) 28 8573 9070  
Email: customer care.chdu@te.com

#### te.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties (MEAS), American Sensor Technologies (AST), TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2016 TE Connectivity Ltd. family of companies All Rights Reserved.