
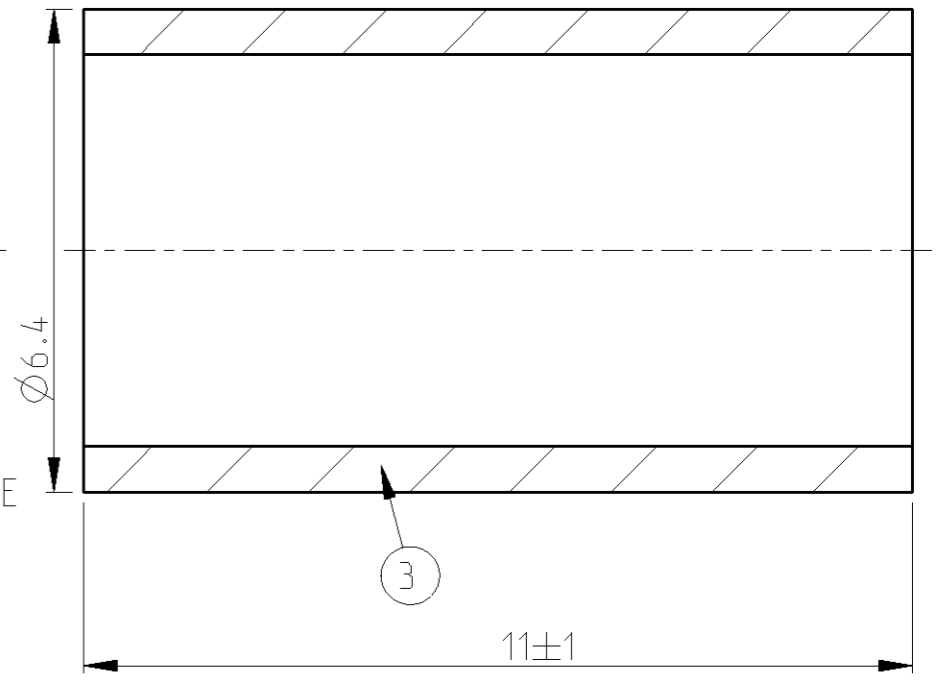
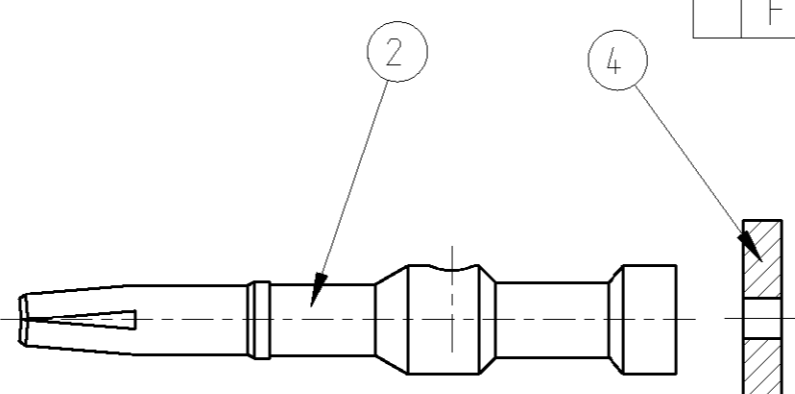


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2001
 © COPYRIGHT 2001 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
E1	EG00-2695-01		29OCT01	JJ	
E2	EG00-3647-01		10DEC01	JJ	
E3	EG00-0279-02		28JAN02	JJ	
F	EGA0-0916-04		20APR04	PK	WS

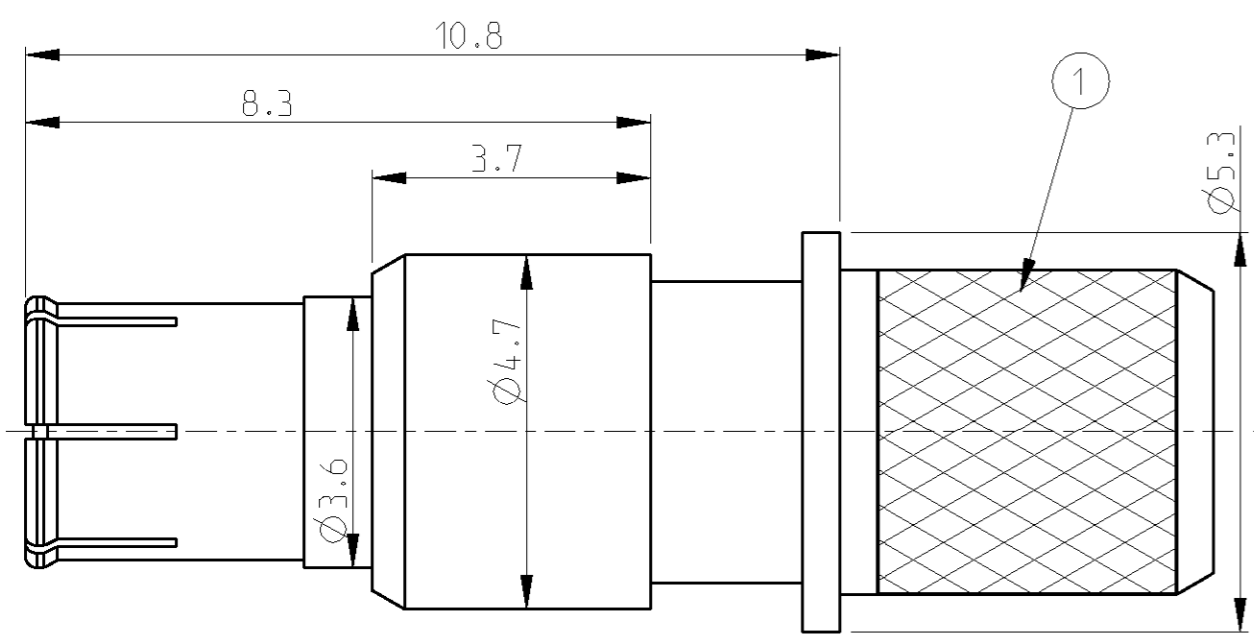

1 Ni PLATING 1.0 µm MIN. - 5.0 µm MAX. THX.

1 VERNICKELT 1,0 µm MIN. - 5,0 µm MAX. DICKE

2 PLATING: 0.1 - 1.0 µm Au OVER 0.1 - 9.0 µm Ni

2 VERGOLDET 0,1 - 1,0 µm Au UEBER 0,1 - 9,0 µm Ni

3 500 OUTER SHELL ASSIES (POS.1) PACKED WITH 500 CENTER CONTACTS (POS.2) AND 500 FERRULES (POS.3) AND 500 WASHERS (POS.4) EACH SEPARATELY IN A PLASTIC BAG, 1 BAG PER POS. PACKED IN A CARDBOARD BOX.

3 500 OUTER-SHELL-ASSIES (POS.1) MIT 500 INNENLEITERN (POS.2) 500 CRIMPHUELSEN (POS.3) UND 500 SCHEIBEN (POS.4) JEWEILS SEPARAT IN PLASTIKBEUTELN VERPACKT, 1 BEUTEL PRO POS. IN EINEM KARTON VERPACKT.

4 HAND CRIMPING TOOL FOR FERRULE (POS.3) AMP PN 539635-1, ADAPTER AMP PN 539958-2 (HEX.5.41+COINING)

4 HANDCRIMPWERKZEUG FUER CRIMPHUELSE (POS.3) AMP PN 539635-1, ADAPTER AMP PN 539958-2 (HEX.5.41+COINING).


5 HAND CRIMPING TOOL FOR CENTER CONTACT (POS.2) PN 601966-1, POSITION 3, ADAPTER AMP PN 957098-1

5 HANDCRIMPWERKZEUG FUER INNENLEITER (POS.2) PN 601966-1, POSITION 3, ADAPTER AMP PN 957098-1.

6 THE CABLE CENTER CONDUCTOR MUST BE TINNED

6 DER INNENLEITER DES KABELS MUSS VERZINNT WERDEN

STRIPPING DIMENSIONS (UNSCALED)
 ABISOLIERMASSE (NICHT MASSTAEBLICH)

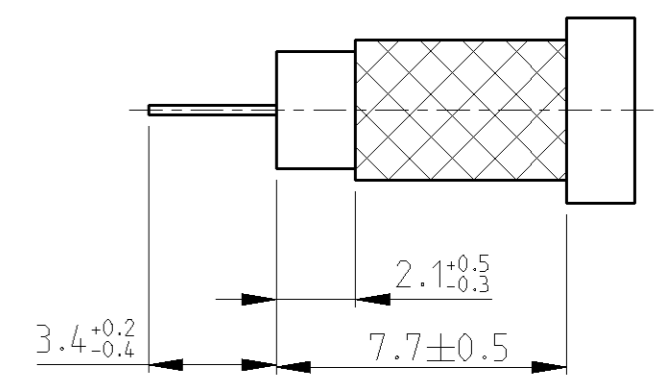

PART-NO.	ITEM NO.	DESCRIPTION	MATERIAL	PLATING
5-619059-1	4	WASHER SCHEIBE	MYLAR TYP A	
	3	FERRULE CRIMPHUELSE	SfCU	1
	2	CENTER CONTACT INNENLEITER	CuZn36Pb1.5	2
	1	OUTER SHELL ASSY AUSSEN KONTAKT	CuZn39Pb3 PE	7 8 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
0 PLC	±0.2
1 PLC	±0.2
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±2°
MATERIAL	FINISH
-	-

DWN	J. Jauris	22MAY01
CHK	O. De Cloet	29OCT01
APVD	H. Wendling	29OCT01
PRODUCT SPEC	-	-
APPLICATION SPEC	114-71003	-
WEIGHT	-	-


		tyco Electronics AMP GmbH D - 64625 Bensheim	
NAME COAXICON, CONNECTION FOR RF, GSM AND GPS PLUG FOR 120 OHM CABLE			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C=619059	-
CUSTOMER DRAWING		SCALE 10:1	SHEET 1 OF 2 REV F

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2000
 © COPYRIGHT 2000 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
A1	-	SEE SHEET 1	-	-	-

CONTROL DIMENSIONS AFTER ASSEMBLY

KONTROLLMASSE NACH MONTAGE

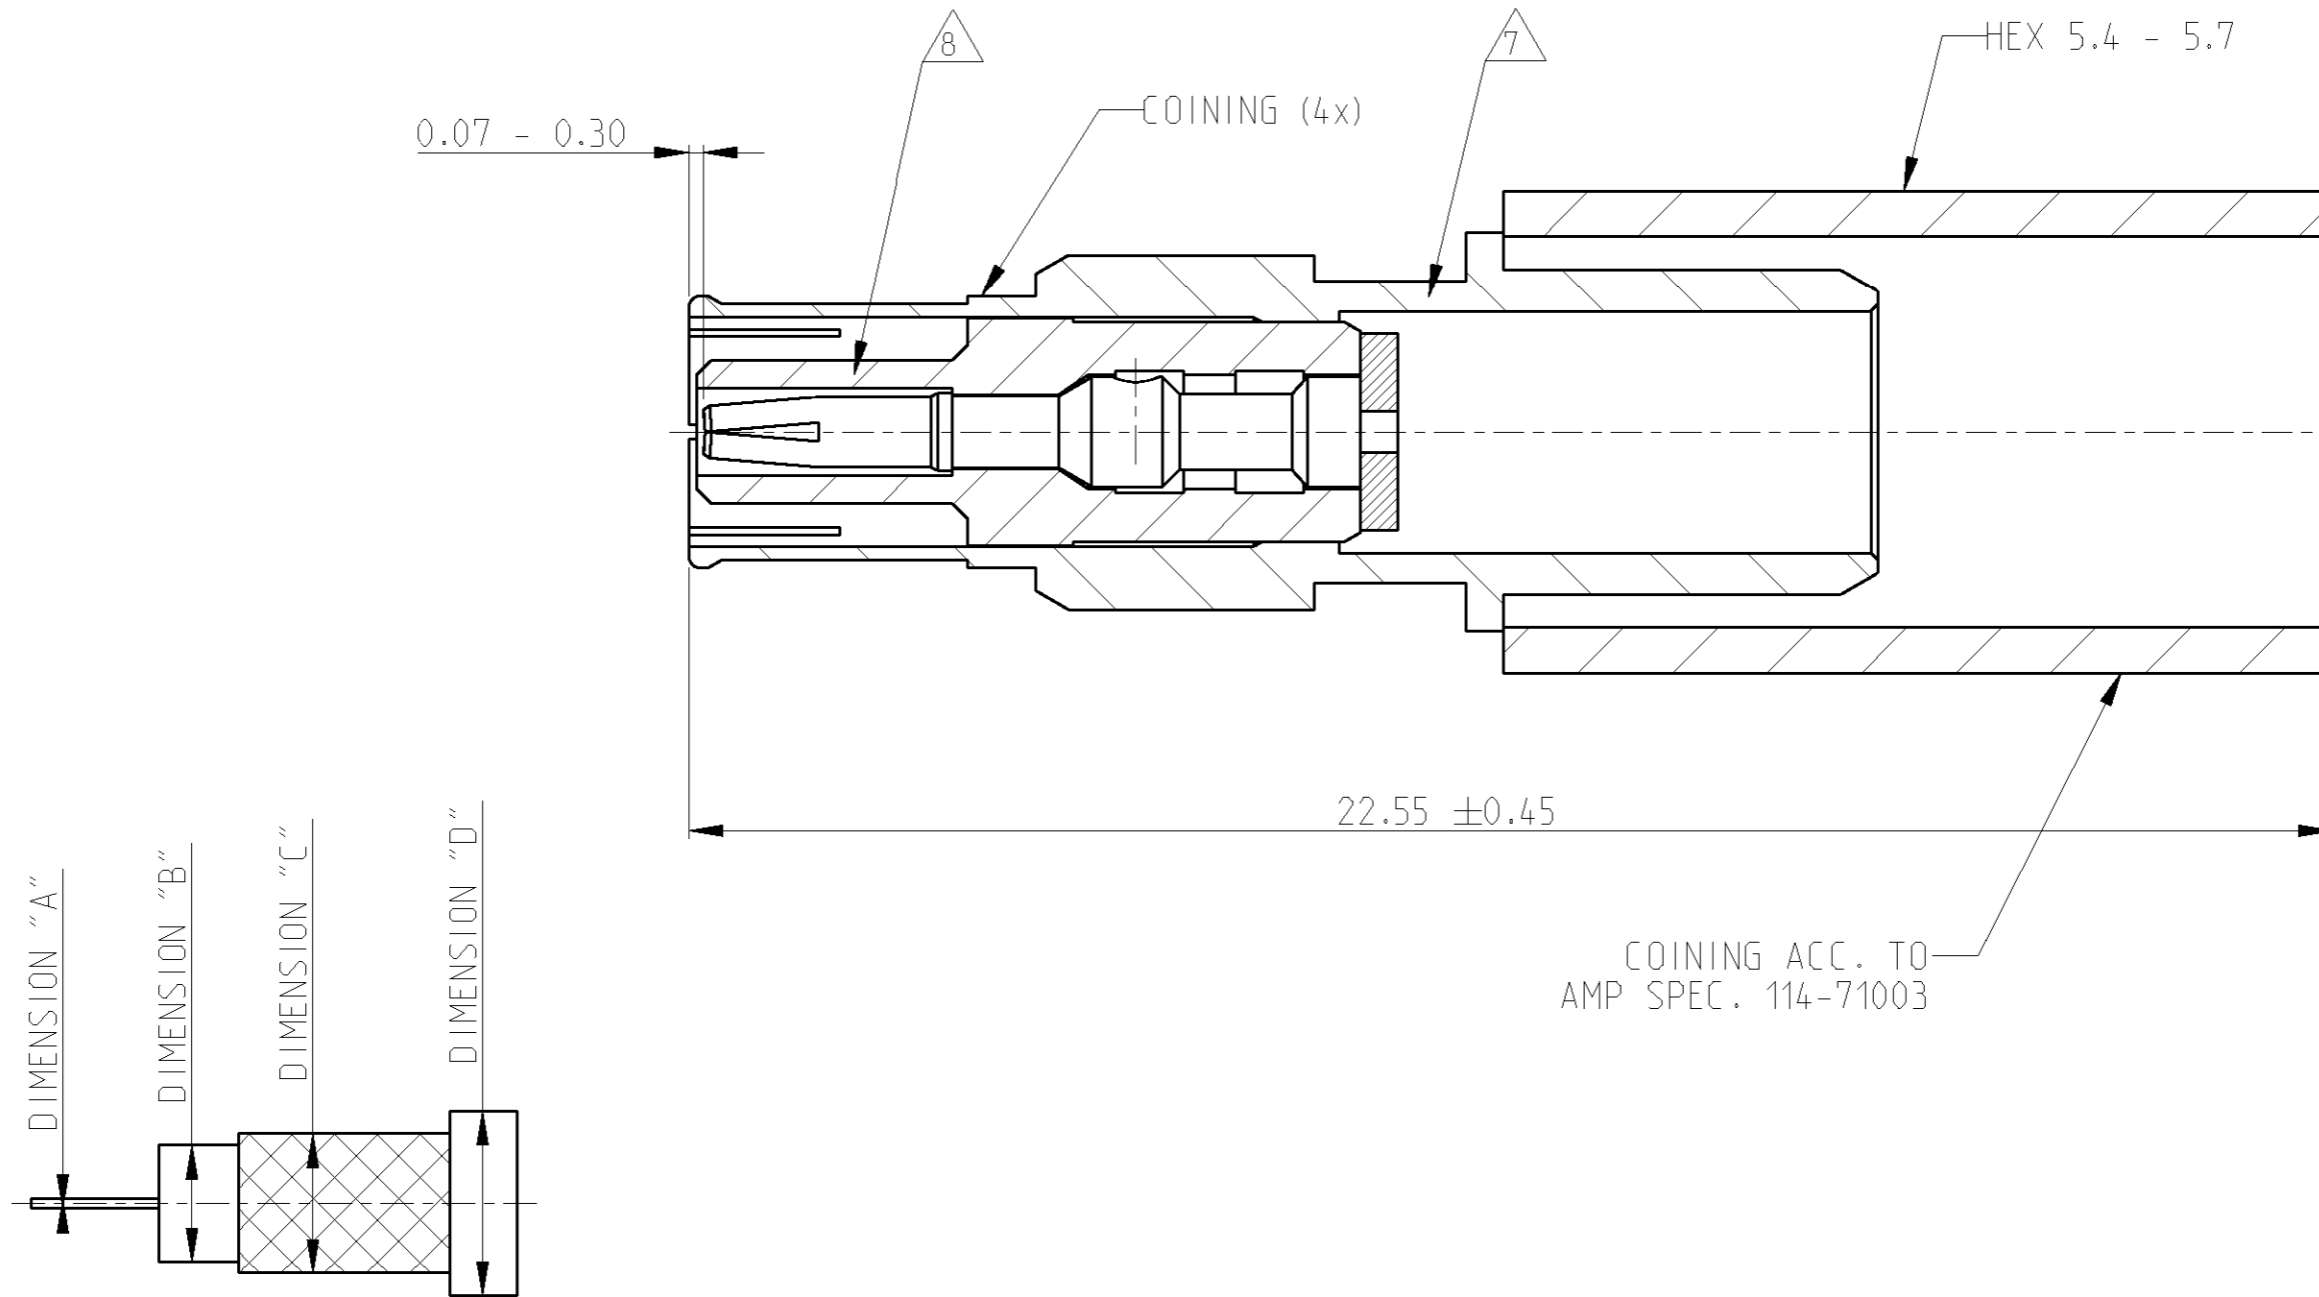

120 OHMS CABLE THAT SUITS TO THIS PN:

A: ONE WIRE $\varnothing 0.25 \pm 0.02$ 6

B: $\varnothing 3.1 +0.05 -0.1$

C: $\varnothing 3.7 \pm 0.1$

D: $\varnothing 4.9 \pm 0.15$

<small>THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.</small>		DWN J. Jauris 01JUN01 CHK O. De Cloet 29OCT01 APVD H. Wendling 29OCT01 PRODUCT SPEC - APPLICATION SPEC 114-71003 WEIGHT -		tyco Electronics tyco Electronics AMP GmbH D - 64625 Bensheim	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.2 1 PLC ± 0.2 2 PLC \pm 3 PLC \pm 4 PLC \pm ANGLES $\pm 2^\circ$		NAME COAXICON, CONNECTION FOR RF, GSM AND GPS PLUG FOR 120 OHM CABLE	
MATERIAL - FINISH -		CUSTOMER DRAWING		SIZE A3 CAGE CODE 00779 DRAWING NO C=619059	RESTRICTED TO -
SCALE 10:1				SHEET 2 OF 2	REV F