





# **DIMENSIONS**

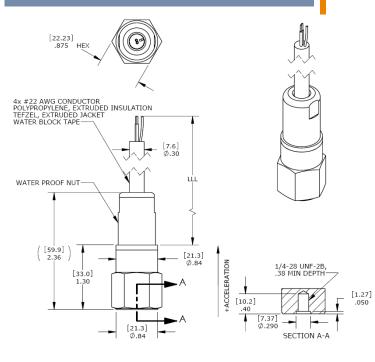

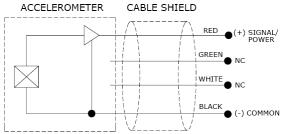

# MODEL 8042-VR/-VP SUBMERSIBLE VELOCITY TRANSMITTER

#### **SPECIFICATIONS**

- **◆** 4-20mA Loop Power Transmitter
- True RMS or Peak Output
- IP68 Protection, >100meters
- Integral Cable, Tefzel & Urethane

The Model 8042-VR/VP is a submersible velocity transmitter designed for harsh environments. The transmitter is available in ranges from 0.5 to 5.0 in/sec, in either 4-20mA RMS or Peak velocity output options, and features a welded Titanium housing. The model 8042 features an integral cable that is custom designed for submersible applications and features a unique water block feature that self-seals in the event of accidental cuts to the cable.

The accelerometer includes internal shielding and a usable bandwidth to 1000Hz.

#### **FEATURES**

- 0.5 to 5.0 in/sec Dynamic Range
- 3-1000Hz Bandwidth
- Case Isolated, Internally Shielded
- Welded Titanium
- Annular Shear Mode Crystals
- Reverse Wiring Protection

# **APPLICATIONS**

- Submersible Pumps
- Rotating Machinery Monitoring
- Underwater Vibration Monitoring
- Outdoor, Harsh Environments
- Gearbox Monitoring
- Shipboard Installations

# PERFORMANCE SPECIFICATIONS

All values are typical at +24°C, 100Hz and 15Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice. Standard product parameters are described in PSC-1003 for Plug & Play AC Accelerometers.

Measurement Specialties family of <u>Piezoelectric Accelerometers</u> are used for vibration/shock monitoring, structural analysis, impact detection and machine monitoring.

**Parameters** 

**DYNAMIC Notes** Measurement Range (in/sec) 0-0.5 0-1.00 0-2.00 0-3.00 0-5.00 Measurement Range (mm/sec) 0 - 12.70-25.4 0-50.80-76.2 0-127 Output (mA) 4-20 4-20 4-20 4-20 4-20 See Note 1 Frequency Response (cpm) 180-60000 180-60000 180-60000 180-60000 180-60000 +10% Frequency Response (Hz) 3-1000 3-1000 3-1000 3-1000 3-1000 ±10% Non-Linearity (%FSO) ±1 Transverse Sensitivity (%) <5

Shock Limit (g) **ELECTRICAL** 

Excitation Voltage (Vdc) 12 to 30
Loop Resistance (Ohms) 900 max See Note 2
Turn on Time (sec) <15

Grounding Case Isolated, Internally Shielded

**ENVIRONMENTAL** 

Temperature Response (%) ±5

Operating Temperature (°C)

-20 to +80 for T (Tefzel) option cable
-20 to +60 for U (Urethane) option cable
Protection Rating

IP68, 100meter minimum submersion

5000

**PHYSICAL** 

Sensing Element Ceramic (shear mode)

Case Material Titanium

Weight (grams) 70

Mounting Torque 24 lb-in (2.7 N-m)

Calibration supplied: CS-FREQ-0100 NIST Traceable Amplitude Calibration from 20Hz to ±10% Frequency Response Limit

**Supplied accessories:** AC-A03663 1/4-28 to 1/4-28 mounting stud

**Optional accessories:** AC-D03664 1/4-28 to M5 mounting stud

AC-D03665 ¼-28 to M6 mounting stud AC-A04209 Magnetic Mounting Adaptor AC-D04210 Adhesive Mounting Adaptor

#### Note 1

The signal output from the 8042 sensor can be calculated using the following formulas.

Velocity Level in IPS (in/sec) = (Signal Output in mA - 4mA) x (Full Scale Range in IPS / 16mA)

Typical outputs are illustrated in the tables below.

| Signal Output | 8042-VR & 8042-VP Velocity Transmitter Ranges |            |            |            |            |  |
|---------------|---|------------|------------|------------|------------|--|
|               | 0.50in/sec                                    | 1.00in/sec | 2.00in/sec | 3.00in/sec | 5.00in/sec |  |
| 4mA           | 0.00in/sec                                    | 0.00in/sec | 0.00in/sec | 0.00in/sec | 0.00in/sec |  |
| 8mA           | 0.125in/sec                                   | 0.25in/sec | 0.50in/sec | 0.75in/sec | 1.25in/sec |  |
| 12mA          | 0.25in/sec                                    | 0.50in/sec | 1.00in/sec | 1.50in/sec | 2.50in/sec |  |
| 16mA          | 0.375in/sec                                   | 0.75in/sec | 1.50in/sec | 2.25in/sec | 3.75in/sec |  |
| 20mA          | 0.50in/sec                                    | 1.00in/sec | 2.00in/sec | 3.00in/sec | 5.00in/sec |  |

#### Note 2

Maximum Loop Resistance = (Excitation Voltage - 12Vdc) / 20mA

# **ORDERING INFORMATION**

PART NUMBERING Model Number+Output Type+Range+Cable Option+Cable Length

| 8042-XX-GG-TZZZZ |  | -XX                | -GG                                  |
|------------------|--|--------------------|--------------------------------------|
| 1                | _ Cable Length (0360 is 360 inches)      | VR = RMS           | 05 = 0-0.5 in/sec (0-12.7 mm/sec)    |
| I I I            | _ Cable Jacket Option (T is Tefzel, U is | Urethane)VP = Peak | 10 = 0-1.0 in/sec (0-25.4 mm/sec)    |
| I I              | Dynamic Range (05 is 0-0.5 in/sec)       |                    | 20 = 0-2.0 in/sec (0-50.8 mm/sec)    |
| <u> </u>         | _ Range Type (VR is RMS Velocity)        |                    | 30 = 0-3.0  in/sec  (0-76.2  mm/sec) |
|                  |  |                    | 50 = 0-5.0  in/sec  (0-127  mm/sec)  |

Example: 8042-VR-10-U0360

Model 8042, RMS Velocity Output, 0-1.0 in/sec, Urethane Cable, 360 inch (30ft) Cable Length

#### **NORTH AMERICA**

Measurement Specialties, Inc., a TE Connectivity Company Tel: 800-522-6752

Email: <a href="mailto:customercare.hmpt@te.com">customercare.hmpt@te.com</a>

#### **EUROPE**

MEAS France SAS a TE Connectivity Company Tel: 800-440-5100

Email: customercare.lcsb@te.com

#### ASIA

Measurement Specialties (China), Ltd., a TE Connectivity Company Tel: 0400-820-6015

Email: customercare.shzn@te.com

#### TE.com/sensorsolutions

 $\label{eq:measurement} \mbox{Measurement Specialties, Inc., a TE Connectivity company.}$ 

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

