



DP86

Constant Voltage with Fitting

SPECIFICATIONS

- ◆ **316L SS**
- ◆ **Wet/Wet Differential**
- ◆ **Low Pressure**
- ◆ **0 – 100mV Output**

The DP86 constant voltage with fitting differential pressure sensor is a double-sided, media compatible, piezoresistive silicon pressure sensor packaged in a 316L stainless steel housing. The DP86 constant voltage with fitting can be designed with up to 8 different threaded process fittings. The sensing package utilizes silicone oil to transfer pressure from the two 316L stainless steel diaphragms to a single sensing element.

The DP86 constant voltage with fitting is designed for high performance, low pressure applications where differential pressure measurement is required. The stainless steel package makes it suitable for use in liquids and corrosive environments.

Please refer to the DP86, uncompensated, non-silicone oil, constant current and constant voltage (fittings and cable design) for more information on different features of the DP86.

FEATURES

Threaded Process Fittings
 Up to -40°C to +125°C Operating Range
 Up to ±0.1% Pressure Non Linearity
 Solid State Reliability
 Low Pressure

APPLICATIONS

Level Controls
 Tank Level Measurement
 OEM Equipment
 Corrosive Fluids and Gas Measurement Systems
 Flow Measurements

STANDARD RANGES

Range	psid	Range	bard
0 to 1	*	0 to .07	*
0 to 5	*	0 to .35	*
0 to 15	*	0 to 001	*
0 to 30	*	0 to 002	*
0 to 50	*	0 to 3.5	*
0 to 100	*	0 to 007	*
0 to 300	*	0 to 020	*
0 to 500	*	0 to 035	*

PERFORMANCE SPECIFICATIONS

Supply Voltage: 10Vdc

Ambient Temperature: 25°C (unless otherwise specified)


PARAMETERS	≤005PSI			≥015PSI			UNITS	NOTES
	MIN	TYP	MAX	MIN	TYP	MAX		
Span		1psi: 77, 80, 83 5psi: 98, 100, 102		99	100	101	mV	
Zero Pressure Output	-2.0	0	2.0	-1.0	0	1.0	mV	1
Pressure Non Linearity		1psi: -0.30 to 0.30 5psi: -0.20 to 0.20		-0.10		0.10	%Span	2
Pressure Hysteresis	-0.10	±0.02	0.10	-0.05	±0.02	0.05	%Span	
Repeatability		±0.02			±0.02		%Span	
Accuracy RMS of NL, HY, RP		±0.6	±1.0		±0.6	±1.0	%Span	
Input Resistance	5500	9000	12500	5500	9000	12500	Ω	
Output Resistance	4000		30000	4000		25000	Ω	
Temperature Error – Span	-1.5		1.5	-1.0		1.0	%Span	3
Temperature Error – Offset	-2.5		2.5	-1.0		1.0	%Span	4
Thermal Hysteresis – Span	-0.25	±0.05	0.25	-0.25	±0.05	0.25	%Span	3
Thermal Hysteresis – Offset	-0.25	±0.05	0.25	-0.25	±0.05	0.25	%Span	3
Long Term Stability – Span		±0.10			±0.10		%Span/Year	
Long Term Stability – Offset		±0.25			±0.10		%Span/Year	
Line (Common Mode) Pressure			1000			1000	psi	
Line Pressure Effect on Zero		1psi: 4.0 Max 5psi: 0.8 Max				0.5	%Span/1Kpsi	
Supply Voltage		10	14		10	14	V	4
Output Load Resistance	5			5			MΩ	5
Insulation Resistance (50Vdc)	50			50			MΩ	6
Output Noise (10Hz to 1KHz)		1.0			1.0		uV p-p	
Response Time (10% to 90%)		0.1			0.1		ms	
Pressure Overload		1psi: 10X Max 5psi: 3X Max				3X	Rated	7
Pressure Burst		1psi: 12X Max 5psi: 4X Max				4X	Rated	7
Compensated Temperature		1psi: 0°C to 50°C 5psi: 0°C to 70°C		-20		+85	°C	
Operating Temperature		1psi: -40°C to +85°C 5psi: -40°C to +125°C		-40		+125	°C	8
Storage Temperature	-40		+125	-40		+125	°C	8
Voltage Breakdown	500V rms @ 50Hz, Leakage Current < 1mA							
Shock	50g, 1msec half sine shock per MIL-STD-202G, Method 213B, Condition A							
Vibration	±20g MIL-STD 810C, Procedure 514.2, Figure 514.2-2, Curve L							
Media – Pressure Port	Liquids and gases compatible with 316/316L Stainless Steel							

Notes


1. Measured at ambient.
2. Best fit straight line
3. Over the compensated temperature range with respect to 25°C.
4. Guarantees output/input ratiometricity.
5. Load resistance to reduce measurement errors due to output loading.
6. Between case and sensing element.
7. For “H” (high-end) port, rated or 1000psi whichever is less. For “L” (low-end) port rated or 150psi whichever is less. The maximum pressure that can be applied to a transducer without rupture of either the sensing element or transducer.
8. -40°C to +125°C for 5psi. Maximum temperature for product with standard cable and connector is -20°C to +105°C.

DIMENSIONS


Dimensions are in inches [mm]

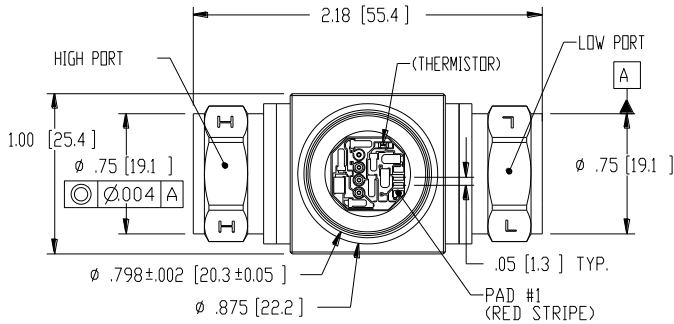

VIEW SHOWN w/o CABLE FOR CLARITY

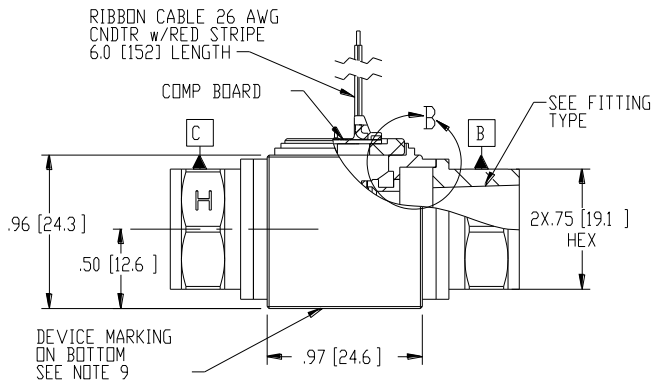





SCALE 1:1
-1~-4 FITTING



DETAIL B
SCALE 2 : 1

PAD NO	FUNCTION
1	-OUT
2	+OUT
3	-EX
4	+EX


FITTING TYPE	
1	1/8-27 NPT, FEMALE, 3/4 HEX
2	1/4-18 NPT, FEMALE, 3/4 HEX
3	7/16-20 UNF, FEMALE, 3/4 HEX
4	1/4-19 BSP, FEMALE, 3/4 HEX
5	1/8-27 NPT, MALE, 3/4 HEX
6	1/4-18 NPT, MALE, 3/4 HEX
7	7/16-20 UNF, MALE, 3/4 HEX
8	1/4-19 BSP, MALE, 3/4 HEX

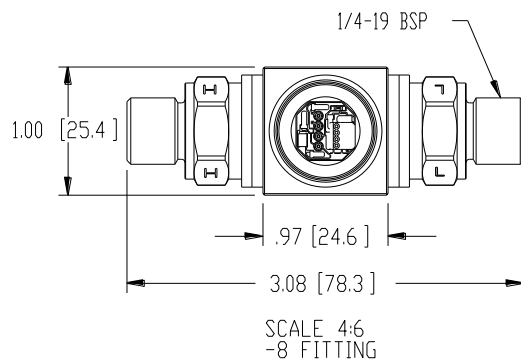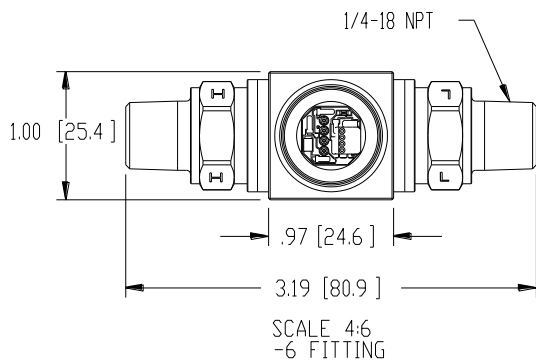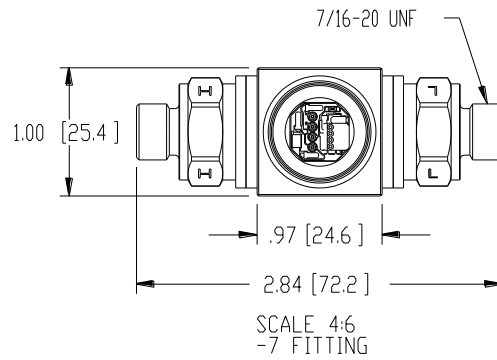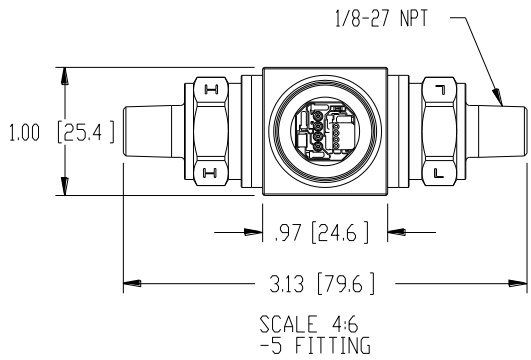

DP86


Constant Voltage with Fitting

CONNECTIONS

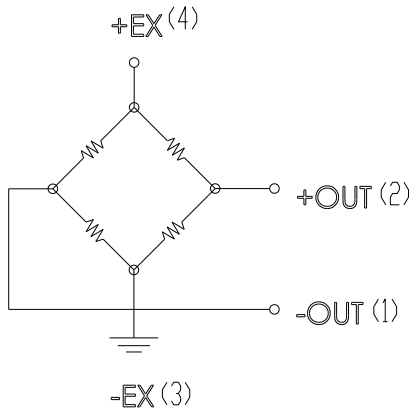

ORDERING INFORMATION

DP86 - 015P - 1 V R

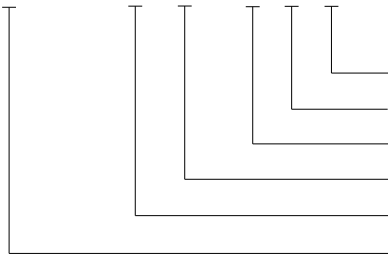

Electrical (C = Ribbon Cable with Connector, R = Ribbon Cable)
Type (V = Constant Voltage, Compensated)
Fitting (See Fitting Table)
Unit (P = psi, B = Bar)
Pressure Range
Model

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
Tel: 800-522-6752
Email: customercare.frmt@te.com

EUROPE

Measurement Specialties (Europe), Ltd.,
a TE Connectivity Company
Tel: 800-440-5100
Email: customercare.lcsb@te.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
Tel: 0400-820-6015
Email: customercare.shzn@te.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.