



DIFFERENTIAL

Pressure Transducer

AST5300 | AST53ED | AST53EN

Overview

The AST5300 offers low differential pressure measurement ranges in high line pressure applications with excellent burst pressure capabilities. The AST5300 has no oil filled cavities and no internal o-rings to fail, making it ideal for food and beverage, oil & gas, pharmaceuticals, semiconductor industries and cold ambients.

Benefits

- ABS (American Bureau of Shipping) Approved
- Oil free - no containment issues
- Wide operating temperature
- Wide range of liquid & gas compatibility
- Compact size
- **Explosion Proof Rated (AST53ED)**
 - ✓ CSA30 Class I Zone 1 Group IIC
 - ✓ Class I Division 1 Groups A, B, C, D
 - ✓ Class II Division 1 Groups E, F and G
 - ✓ Class III Division 1
- **Non-Incendive Rated (AST53EN)**
 - ✓ CSA213 Class I Division 2 Groups A, B, C, D
 - ✓ ANSI/ISA 12.27.01 Single Seal Device

DIFFERENTIAL

AST5300 | AST53ED | AST53EN Pressure Transducer

Applications

- Refrigeration
- Water Management
- Industrial OEM Equipment
- Oil & Gas Platforms
- Pressure Instrumentation
- Process Control
- Gas Compression & Storage
- Test Stands
- Oxygen Delivery Systems
- Hydrogen Fuel (316L)

Performance @ 25°C (77°F) [% of FS]

Line Pressure (Common)	1,500 PSI, maximum (see page 2)
Burst Pressure	5,000 PSI, minimum
Proof Pressure (5-10 PSID)	500 PSI
Proof Pressure (1 PSID)	150 PSI ♦
Linearity	<± 0.2% BFSL
Zero Offset	<± 1.0%
Span Tolerance	<± 0.5%

Environmental Data

Temperature

Operating	-40 to 85°C (-40° to 185°F)
Storage	-55 to 120°C (-67° to 248°F)
Media	-55 to 125°C (-67° to 257°F)
Compensated Range	-5 to 65°C (23° to 149°F)
Total Thermal Error	<±1.0% of FS (10 PSID) <±1.5% of FS (5 to 9 PSID) <±1.0% of FS (1 PSID) ♦


DIFFERENTIAL

AST5300 | AST53ED | AST53EN Pressure Transducer

Electrical Data

Output	0-5V, 1-5V Three Wire	4-20mA	0.5-4.5V Ratiometric
Excitation	10-28VDC	10-28VDC	5VDC, reg
Current Consumption	<10mA	-	<10mA
Output Load	10k Ohms	0-800 Ohms	10k Ohms
EMI / RFI Protection	100V/m	100V/m	100V/m
Reverse Polarity Protection	Yes	Yes	Yes

Dimensions

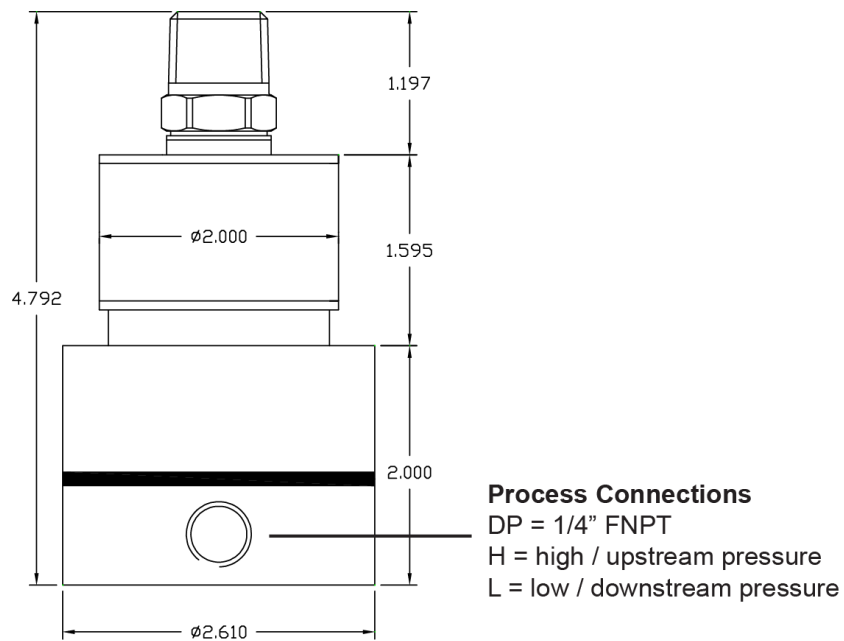

DIFFERENTIAL

AST5300 | AST53ED | AST53EN Pressure Transducer

Ordering Information

AST53	ED	DP	0010	P	4	W	8	000
Series Type								
Approval ED= Explosion proof EN= Non-Incendive 00= OEM								
Mounting / Pressure Connection DP= Threaded Fittings (1/4" FNPT)								
Differential Pressure 0001= 1 PSI* 0008= 8 PSI 0005= 5 PSI 0009= 9 PSI 0006= 6 PSI 0010= 10 PSI 0007= 7 PSI								
Pressure Unit P= PSI								
Output 1= 0.5-4.5V ratiometric 2= 0-5V (3-wire) 3= 1-5V 4= 4-20mA								
Electrical Connection (see table below) Subject to Approval Type Selected								
Wetted Material 8= 316L & Inconel x750								
Options 00= No Special Options								

Electrical Connection Table		00	ED	EN
I	DIN 43650-A	*		*
M	Conduit, 4ft.	*		*
N	Conduit, 6ft.	*		*
R	6-Pin Bendix PT06	*		
T	Conduit, 18AWG, 24 in		*	
U	Conduit, 18AWG, 48 in		*	
W	Conduit, 18AWG, 2m		*	
Y	M12 4-Pin	*		

Line Pressure

The line pressure specification is the maximum pressure the AST5300 can see without damage. Any pressure applied over the listed number will likely damage the transducer and will, at minimum, cause a permanent zero shift. Line pressure should be applied evenly to both ports during start up and shut down. [A Line pressure of 500 psi or less can be applied to one pressure port with the other port at 0psi and will not cause a zero shift of the output. Pressure above 500 PSI to one side may cause a temporary zero shift.]

To recover from a zero shift caused by negative over-pressure to "L" (low / downstream process connection) within the listed limits, apply a positive over-pressure "H" (high / upstream process connection) to 1,450 PSI for a duration of five minutes. Remove the over-pressure and check the zero with no pressure applied. If the zero has not recovered, repeat the positive over-pressure and recheck zero. If it has not recovered after the second try, the zero has been permanently shifted. Contact the factory.

NORTH AMERICA

American Sensor Technologies, Inc. (AST),
a TE Connectivity Company
Tel: 800-522-6752
Email: customercare.molive@te.com

ASIA

Hong Kong Sensor Technologies (HKST),
a TE Connectivity Company
Tel: 0400-820-6015
Email: customercare.shzn@te.com

TE.com/sensors

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.