
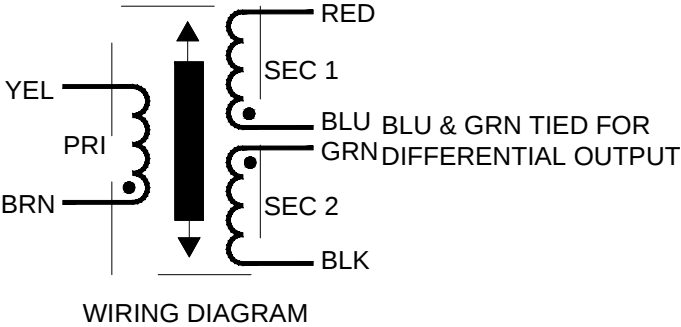


SPECIFICATIONS

INPUT VOLTAGE: 3.0
INPUT FREQUENCY: 2.5 Khz
ELECTRICAL STROKE: +/- 0.500 " [12.52]
SENSITIVITY: .65 mV / VOLT / .001"
SENSITIVITY: 25.6 mV / VOLT / m m
LINEARITY: 0.25% OF FULL RANGE
PHASE SHIFT: +1.0 DEGREES
PRIMARY IMPEDANCE: 1420 OHMS
SECONDARY IMPEDANCE: 735 OHMS
ELECTRO-ETCH:
VISHAY NOBEL
TYPE RAG +/- 12.5/500- M
S/N xxxxx
MADE IN USA

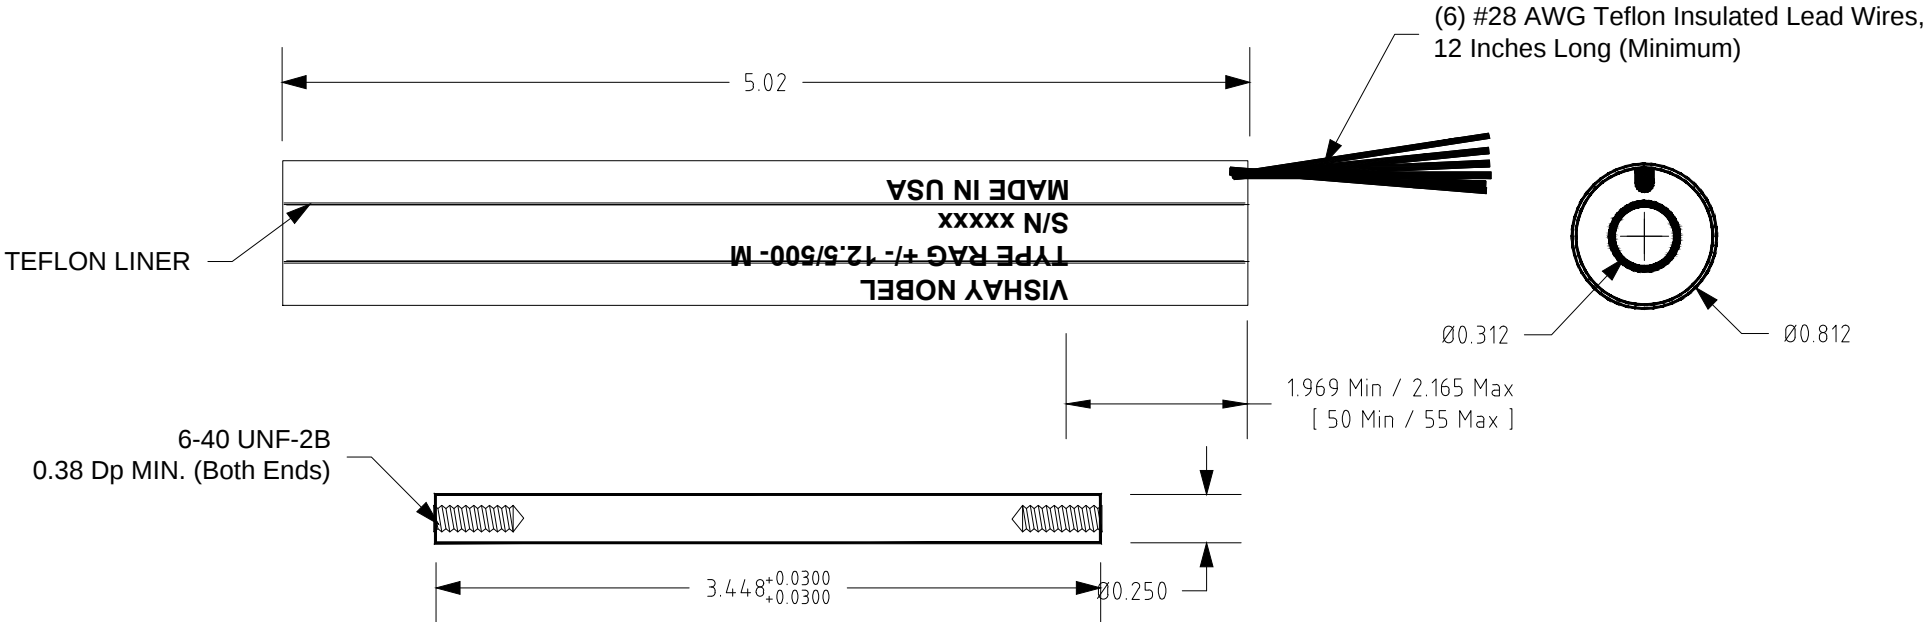

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES TOLERANCES ARE: ANGLES: FRACTIONS: +/- 0.5 DEG. +/-1/64 . DECIMAL: XX= +/- .01 .XXX= +/- .005 This Drawing and Specifications are the property of Macro Sensors, Div. of Howard A. Schaevitz Technologies, Inc. DO NOT COPY without the written approval of Macro Sensors.	DRAFTSMAN: R.E.A.	DATE: 2 MAR 01	 EVERY CONNECTION COUNTS TITLE PR 812 500-0473 OUTLINE		
	CHECKER:	DATE:			
	APPROVED:	DATE:			
	APPROVED:	DATE:	A	C.A.G.E. No. 06WW0	DRAWING No. 015912755000
FINISH:	APPROVED:	DATE:			