

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

FEB '02

© COPYRIGHT 2002 BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD


A

REVISED (FJ00-1621-02)

6AUG02

S.W

I.E

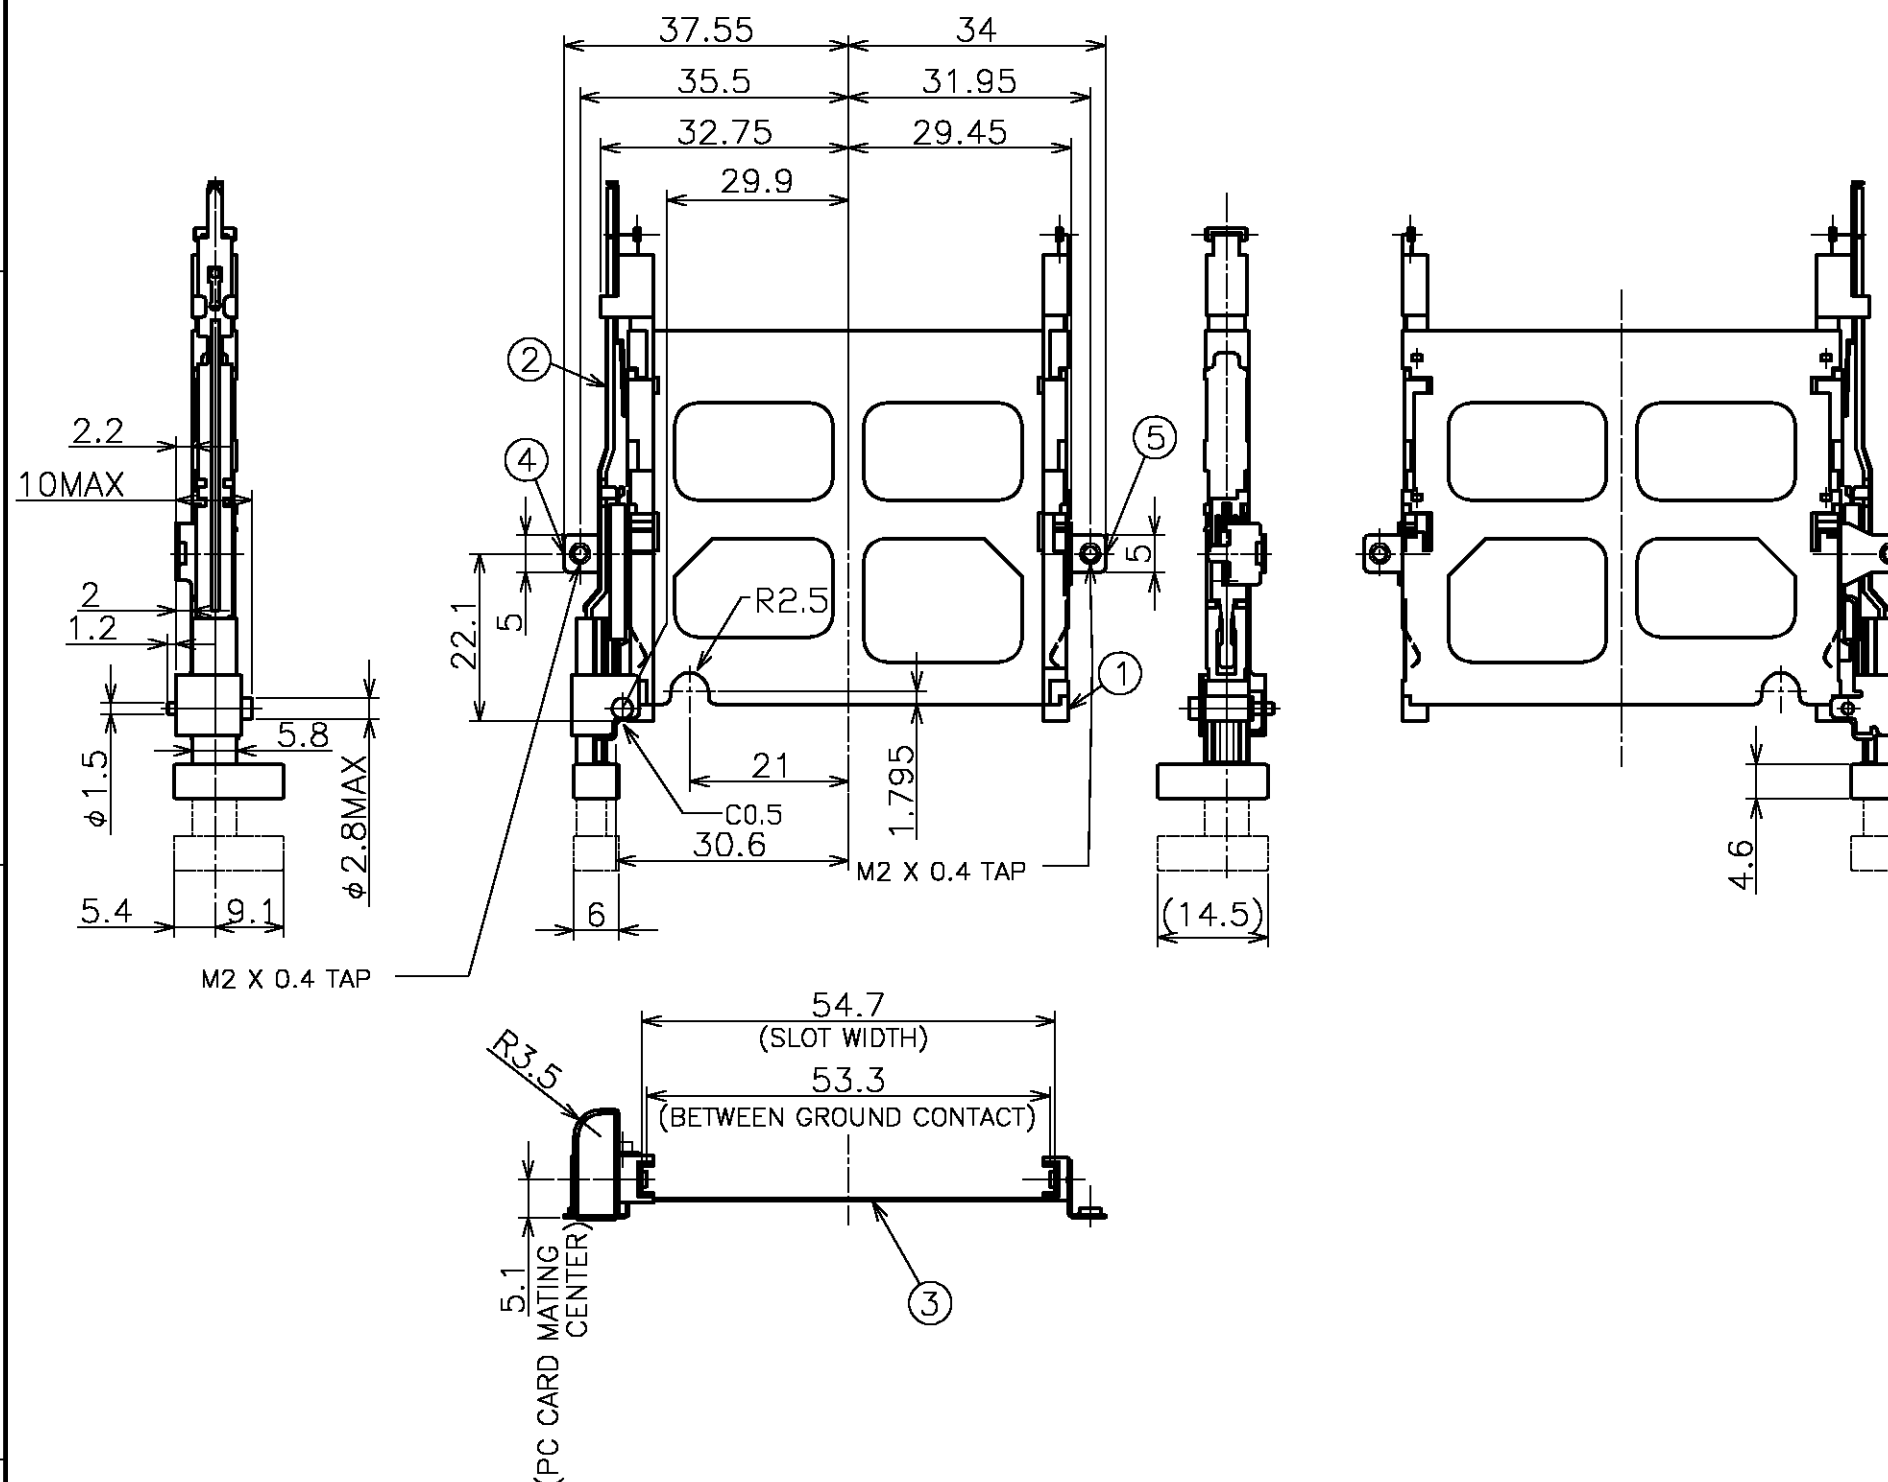

- 1 : AS SHOWN

1	BRACKET(WITHOUT BUTTON SIDE)	(5)
1	BRACKET(BUTTON SIDE)	(4)
1	BELT	(3)
1	PUSH PUSH SUB ASSEMBLY	(2)
1	HOUSING ARM(WITHOUT BUTTON SIDE)	(1)
QTY	NAME	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN S.WATANABE 5FEB02

CHK T.KUSUHARA 5FEB02

APVD I.ENOMOTO 5FEB02

PRODUCT SPEC

108-5678

APPLICATION SPEC

411-5942

WEIGHT 8.8g

CUSTOMER DRAWING

tyco
Electronics

 Tyco Electronics AMP K.K.
 Kawasaki, Japan

NAME

 SINGLE SLOT CARDBUS EJECTOR ASSY
 TOP MOUNT TYPE , PUSH-PUSH LEFT BUTTON
 TOP SIDE BELT

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-1565679

SCALE 1:1

SHEET 1 OF 3

REV A

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

FEB '02



© COPYRIGHT 2002 BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC
JDIST
—

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—	—	—	—	—

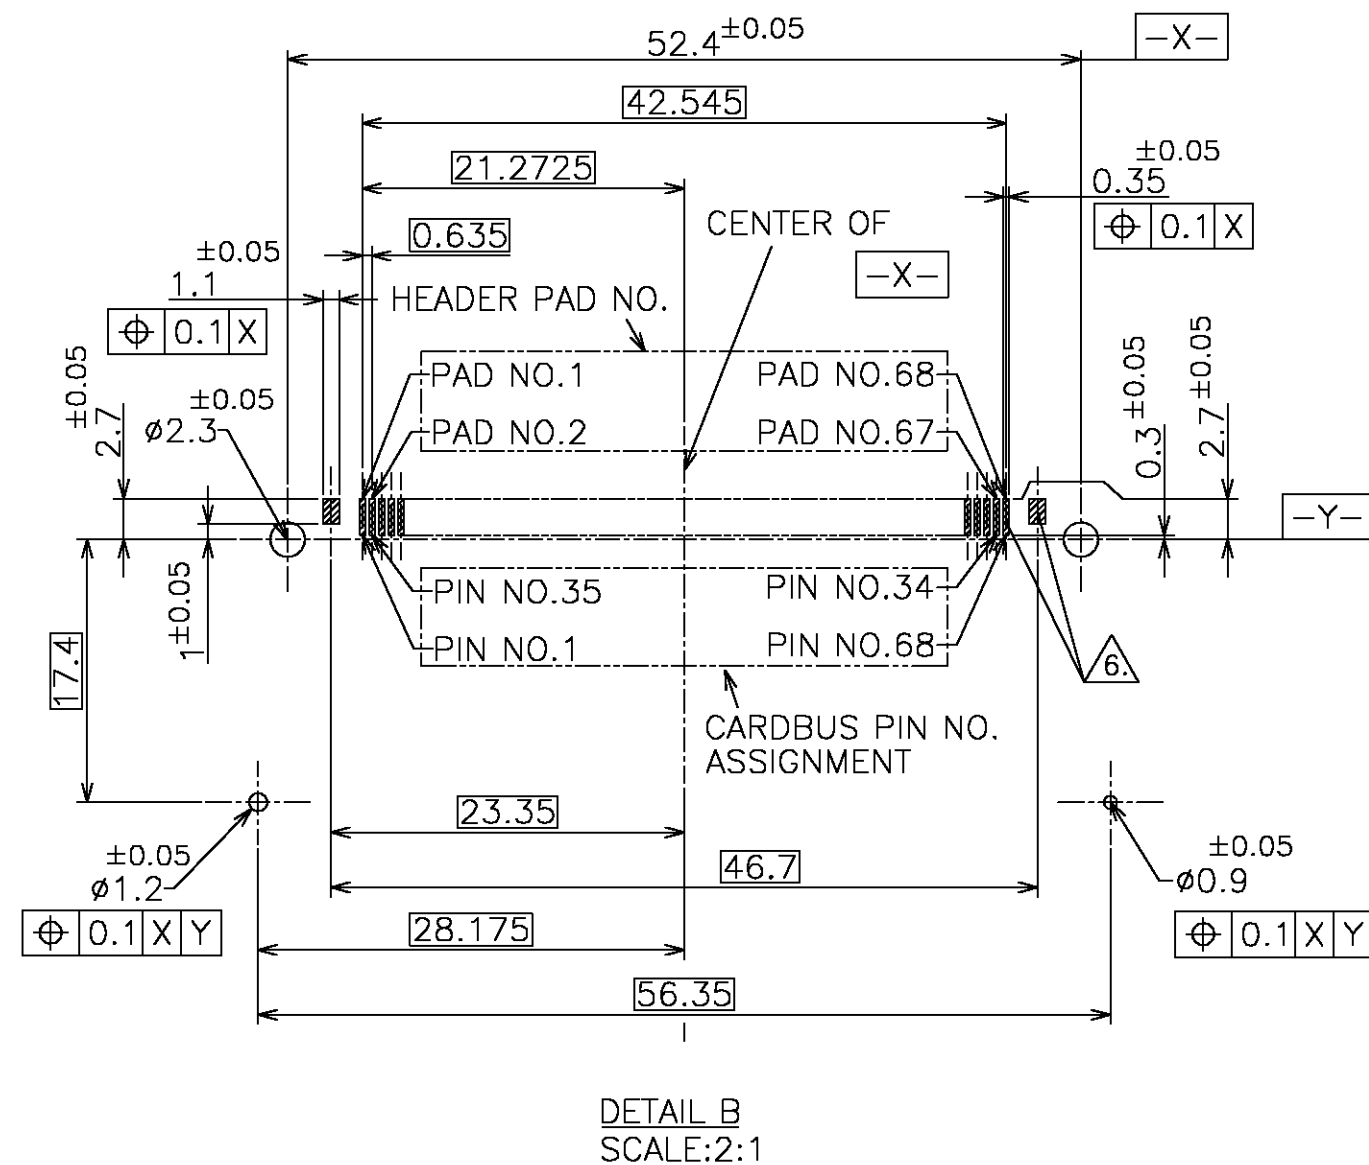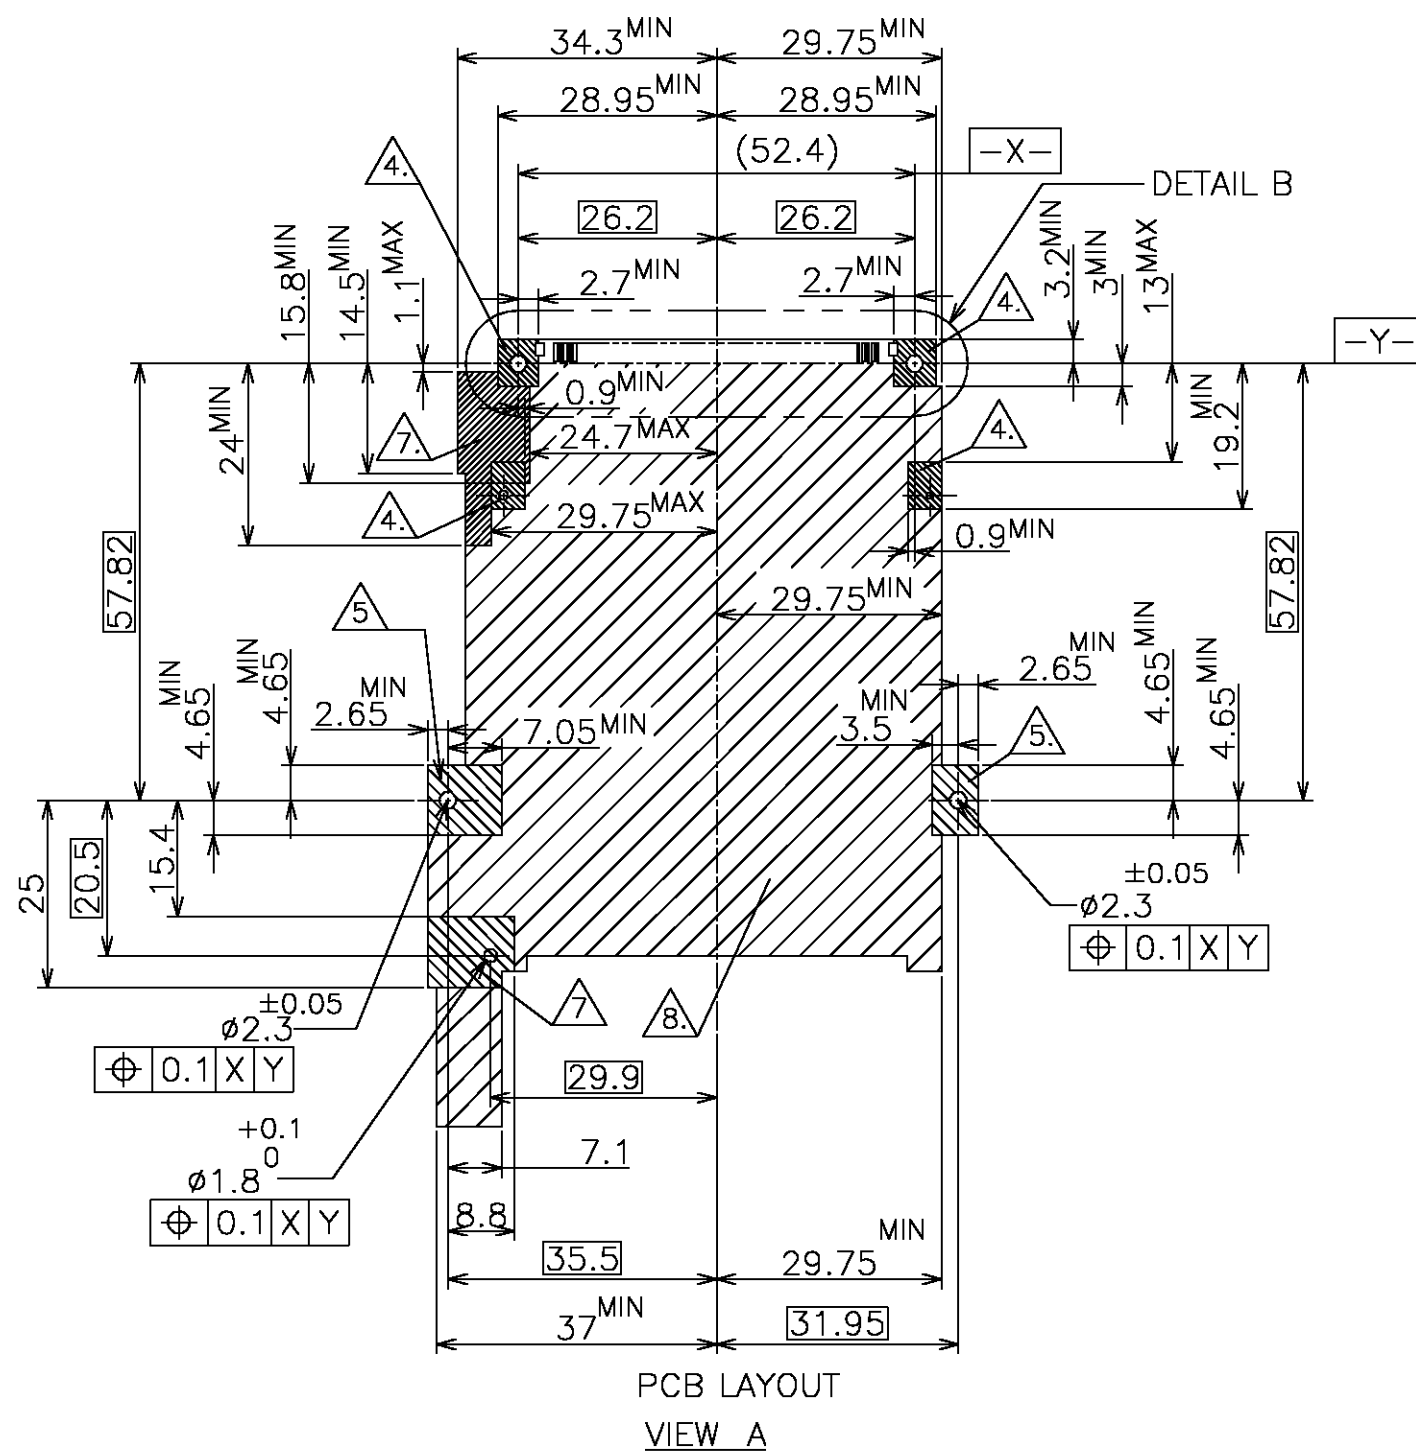

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

MM



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC $\pm$ -
 1 PLC $\pm$ -
 2 PLC $\pm$ -
 3 PLC $\pm$ -
 4 PLC $\pm$ -
 ANGLES $\pm$ -

MATERIAL

FINISH

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

tyco
Electronics

Tyco Electronics AMP K.K.
 Kawasaki, Japan

NAME

SINGLE SLOT CARDBUS EJECTOR ASSY
 TOP MOUNT TYPE, PUSH-PUSH LEFT BUTTON
 TOP SIDE BELT

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-1565679

SCALE 1:1

SHEET 2 OF 3

REV A


4

3

2

1

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
J							

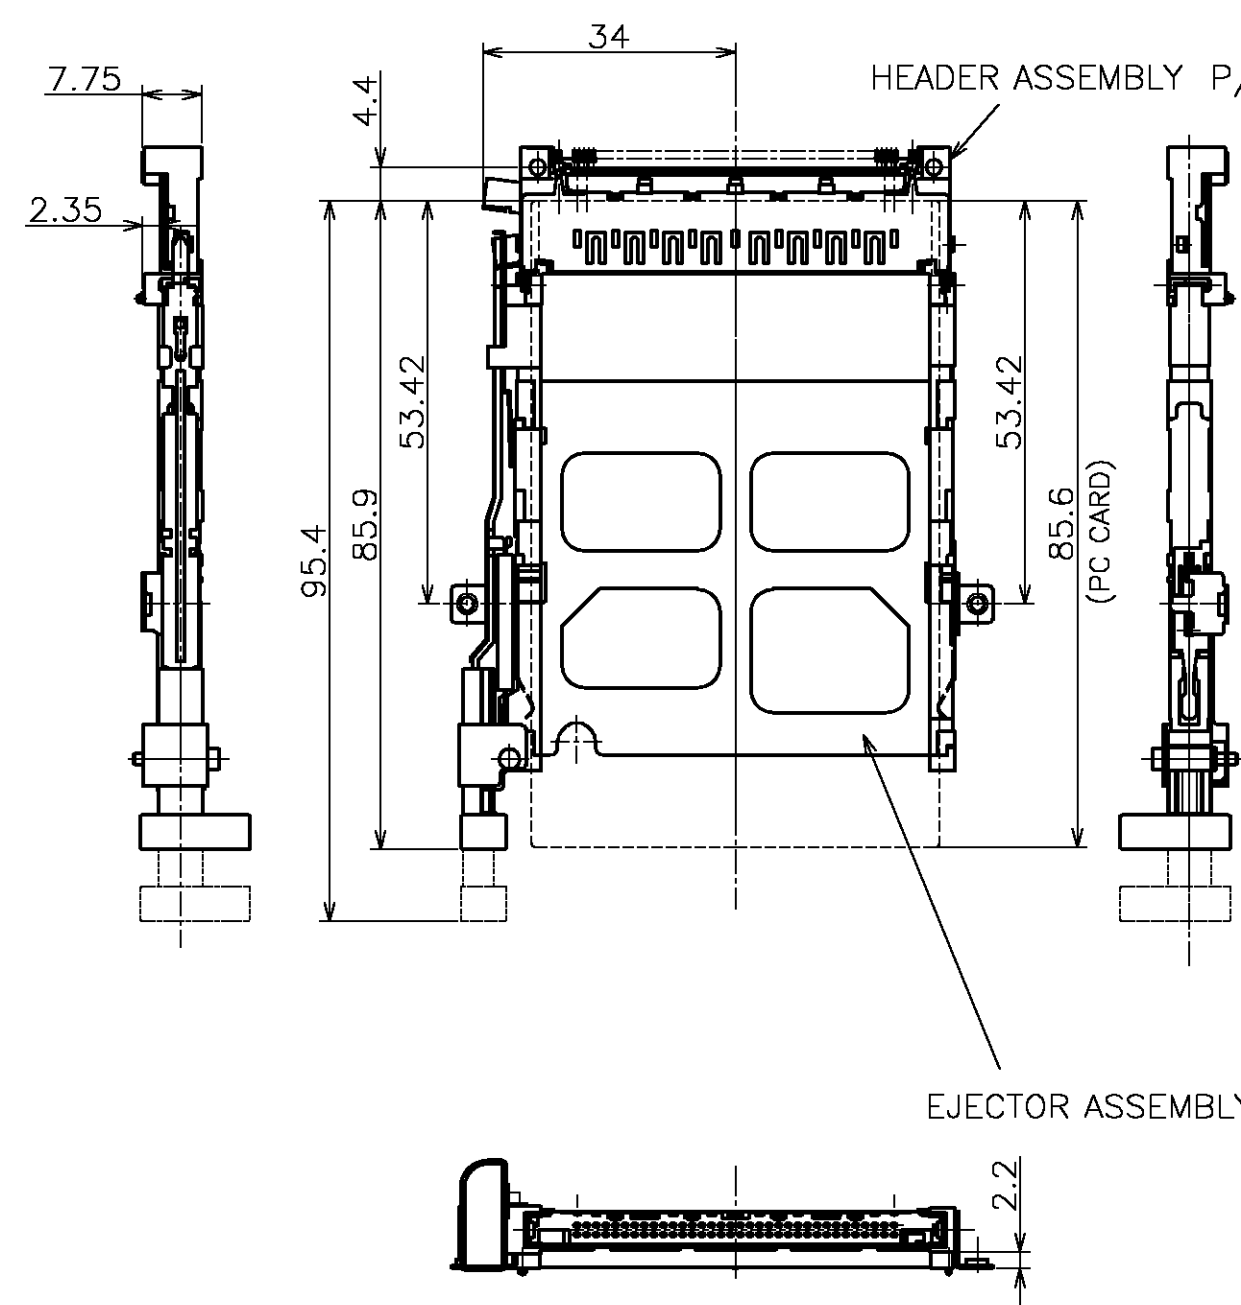

注記

- 推奨ネジ締めトルク:0.15~0.2Nm(1.5~2kgf・cm)
- ネジの締め付けの際は、イジェクタが基板から離れないように、ブラケットの下側を支えて下さい。(参考規格:411-5942)
- 適用PCカード:PCMCIA準拠のPCカード
- 実装エリア(パターン禁止エリア)
- グランドパッド
- 半田付けパッド
- 部品実装及びパターン禁止エリア
- コネクタエリア
- ネジ締め時のネジ押し付け力:14.7N(1.5kgf)以下
- 一般公差:±0.5, ±3°

NOTE

- RECOMMENDED TIGHTENING TORQUE:0.15~0.2Nm(1.5~2kgf・cm)
- WHEN SCREW LOCK TO THE EJECTOR, PLEASE SUPPORT THE BOTTOM SIDE OF BRACKET AS SHOWN. (REFERENCE SPEC.:411-5942)
- APPLIED CARD:PCMCIA ATTRIBUTE PC CARD.
- NO ELECTRONICS COMPONENTS.(NO SIGNAL LINE AREA)
- GROUNDING PAD.
- SOLDERING PAD.
- NO COMPONENT AND NO SIGNAL LINE AREA.
- CONNECTOR AREA.
- THE AXIAL FORCE TO SCREW WHEN MOUNTING CARDBUS : 14.7N(1.5kgf)MAX.
- GENERAL TOLERANCE:±0.5, ±3°

THE FIGURE WHICH ATTACHED HEADER-ASSEMBLY
REFERENCE FIGURE

CARDBUS PIN NO. ASSIGNMENT	HEADER PAD NO.
1	1
35	2
2	3
36	4
3	5
37	6
4	7
38	8
5	9
39	10
6	11
40	12
7	13
41	14
8	15
42	16
9	17
43	18
10	19
44	20
11	21
45	22
12	23
46	24
13	25
47	26
14	27
48	28
15	29
49	30
16	31
50	32
17	33
51	34
18	35
52	36
19	37
53	38
20	39
54	40
21	41
55	42
22	43
56	44
23	45
57	46
24	47
58	48
25	49
59	50
26	51
60	52
27	53
61	54
28	55
62	56
29	57
63	58
30	59
64	60
31	61
65	62
32	63
66	64
33	65
67	66
34	67
68	68

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	tyco		Tyco Electronics AMP K.K.	
DIMENSIONS: MM		CHK	Electronics		Kawasaki, Japan	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME		SINGLE SLOT CARDBUS EJECTOR ASSY	
0 PLC ±		PRODUCT SPEC	SIZE		CAGE CODE	DRAWING NO
1 PLC ±		APPLICATION SPEC	A3		00779	C-1565679
2 PLC ±		WEIGHT	CUSTOMER DRAWING		SCALE	SHEET
3 PLC ±					1:1	3 OF 3
4 PLC ±						REV A
ANGLES ±						
FINISH						
MATERIAL						