




STRAIGHT ADAPTOR

-00

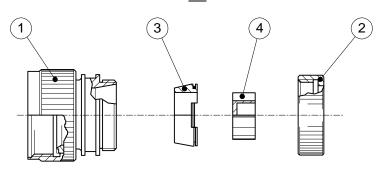



<u>-45</u>

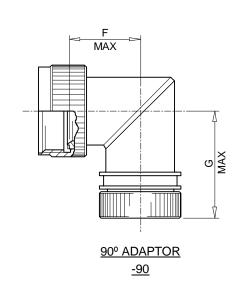

© 2006 Tyco Electronics Corporation. All rights reserved.

TITLE: **tyco** | Electronics **HEXASHIELD ADAPTOR FOR CODE** Tyco Electronics 300 Constitution Drive **54 CONNECTORS-PLAIN CLAMPING** Menlo Park, CA 94025 Wire and Harnessing Products NUT USA This drawing and the information set forth hereon is the property of Tyco Electronics and is to be held in trust and confidence. Publication, duplication, disclosure or use for UNLESS OTHERWISE SPECIFIED DOCUMENT NO. DIMENSIONS ARE IN MILLIMETERS. HEX54-SC-YY-YY-AYY-1-YY any other purpose not expressly authorized in writing by INCH DIMENSIONS ARE SHOWN IN Tyco Electronics is prohibited. **BRACKETS** SHEET: DATF: Tyco Electronics reserves the right to amend this drawing at FILE: SCALE: DRAWN: any time. Users should evaluate the suitability of the **IRT** MAY, 2001 D060257 NONE 1 OF 4 product for their application.

REV:	DCR #	DATE:
Α	D060257	AUG 17, 2006

KIT DESCRIPTION

ITEM	DESCRIPTION	MATERIAL		
1	BODY ASSEMBLY	NUT - STAINLESS STEEL		
		BODY - ALUMINIUM ALLOY		
2	CLAMPING NUT - PLAIN	ALUMINIUM ALLOY		
3	CONIC RING	ALUMINIUM ALLOY		
4	STAR	ALUMINIUM ALLOY		


TABLE OF DIMENSIONS

Order Number		Size /erleaf)	ØA Thread UNF/UNEF-2B	ØB Max	ØC Max	D Max	E Max	F Max	G Max		rule ntity
			1							Std.	Opt.
09	08	N/A	0.5000"-20	16.0 [0.63"]	17.5 [0.69"]	12.5 [0.49"]	25.5 [1.00"]	17.0 [0.67"]	30.5 [1.20"]	1	-
11	10	N/A	0.6250"-24	22.0 [0.87"]	21.5 [0.85"]	13.0 [0.51"]	26.0 [1.02"]	17.5 [0.69"]	30.5 [1.20"]	2	-
13	12	07	0.7500"-20	25.0 [0.98"]	22.5 [0.89"]	14.0 [0.55"]	26.5 [1.04"]	19.0 [0.75"]	32.0 [1.26"]	3	-
15	14	12	0.8750"-20	30.0 [1.18"]	25.5 [1.00"]	14.5 [0.57"]	27.5 [1.08"]	20.5 [0.81"]	33.5 [1.32"]	5	-
17	16	19	1.0000"-20	33.0 [1.30"]	28.5 [1.12"]	15.0 [0.59"]	28.0 [1.10"]	22.0 [0.87"]	35.0 [1.38"]	6	-
19	18	27	1.0625"-18	37.0 [1.46"]	31.5 [1.24"]	15.5 [0.61"]	28.5 [1.12"]	23.5 [0.93"]	36.5 [1.44"]	7	-
21	20	37	1.1875"-18	38.0 [1.50"]	35.0 [1.38"]	16.5 [0.65"]	29.0 [1.14"]	25.5 [1.00"]	38.5 [1.52"]	9	11
23	22	N/A	1.3125"-18	41.0 [1.61"]	38.0 [1.50"]	17.0 [0.67"]	30.0 [1.18"]	27.0 [1.06"]	40.0 [1.57"]	10	13
25	24	N/A	1.4375"-18	46.0 [1.81"]	41.0 [1.61"]	18.0 [0.71"]	31.0 [1.22"]	28.5 [1.12"]	41.5 [1.63"]	12	17

tyes Electronics Wire and Harnessing Products		Tyco Electronics 300 Constitution Drive Menlo Park, CA 94025 USA	HEXASHIELD ADAPTOR FOR CODE 54 CONNECTORS-PLAIN CLAMPING NUT			
DIMENSIONS ARE IN property of Tyco Electron confidence. Publication, of			ormation set forth hereon is the nics and is to be held in trust and duplication, disclosure or use for pressly authorized in writing by bited.	HEX5		YY-AYY-1-YY
DRAWN: IRT	DATE: MAY, 2001 Tyco Electronics reserves the right to amend this draw any time. Users should evaluate the suitability of the product for their application.		evaluate the suitability of the	FILE: D060257	SCALE: NONE	SHEET: 2 OF 4

REV:	DCR#	DATE:
Α	D060257	AUG 17, 2006

PART NUMBERING

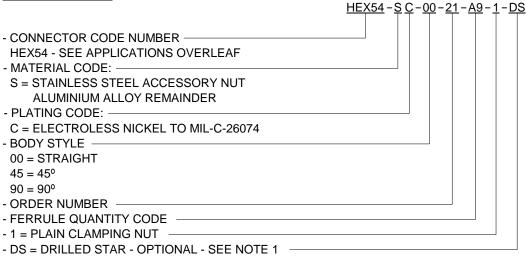


APPLICATION

- These adaptors are designed to be mounted on the following connectors:

```
MIL-C-26482 Series II )
MIL-C-83723 Series I and III )
MIL-C-5015 ) Shell Size Type A
HE312 ) Shell Size Type B
DBAD )
```

- They are qualified to the Raychem specification RB-114, when installed on metallic Mil-Specification circular connectors only.
- They are designed primarily for open wire bundle installation but are also designed to accept Raychem heat shrink moulded parts where strain relief is required see illustration.

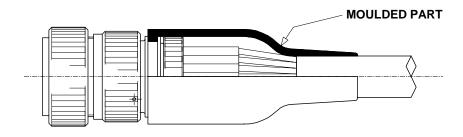

- Use in conjunction with the ferrules HET-A-0XX, which are purchased separately. Refer to HET-A-0XX S.C.D. for relevant selection details.

INSTALLATION

- See Installation Procedure RPIP-696-04.

tyco Electronics Wire and Harnessing Products		Tyco Electronics 300 Constitution Drive Menlo Park, CA 94025 USA			PTOR FOR CODE PLAIN CLAMPING T	
DIMENSIONS ARE IN property of Tyco Electronic confidence. Publication, of			ormation set forth hereon is the iics and is to be held in trust and duplication, disclosure or use for pressly authorized in writing by bited.	HEX5		YY-AYY-1-YY
DRAWN: IRT	DATE: MAY, 2001	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		FILE: D060257	SCALE: NONE	SHEET: 3 OF 4


REV:	DCR #	DATE:
Α	D060257	AUG 17, 2006

PACKAGING

- All components are supplied in a plastic bag.

NOTES!

- 1. Item 4 Star is **not** supplied with Hexashield Order Number 09.
- 2. The DS option, illustrated below, is for a Drilled Star that is available on sizes 15 to 25 only. This option is to allow unshielded wires to pass through the assembly.




STAR SIZE	15	17	19	21	23	25
ØH MAX	3.0	6.0	9.0	12.0	15.0	18.0
	[0.12"]	[0.24"]	[0.35"]	[0.47"]	[0.59"]	[0.71"]

3. Where the ferrule quantities required are standard, the item 4 - Star - is also standard. If the optional quantity is selected then 2 items 4 will be supplied - one "split" and the other one standard. See below for illustration.

EXAMPLE: FERRULE QUANTITY CODE -A13

-A13 = -A10 SPLIT STAR + -A3 STANDARD STAR



4. Assembly is to be permanently marked with Code Identity Number and Part Number. (e.g. 06090 HEX54-SC-00-21-A9-1)



Wire and Harnessing Products

Products

Tyco Electronics 300 Constitution Drive Menlo Park, CA 94025 USA TITLE:

HEXASHIELD ADAPTOR FOR CODE 54 CONNECTORS-PLAIN CLAMPING NUT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN

MILLIMETERS.
INCH DIMENSIONS ARE SHOWN IN

BRACKETS DRAWN:

IRT

DATE: MAY, 2001 This drawing and the information set forth hereon is the property of Tyco Electronics and is to be held in trust and confidence. Publication, duplication, disclosure or use for any other purpose not expressly authorized in writing by Tyco Electronics is prohibited.

Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.

DOCUMENT NO.

HEX54-SC-YY-YY-AYY-1-YY

FILE: SCALE: SHEET: D060257 NONE 4 OF 4