

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE NPR 8914	93-2-3	R6
B	REV'D P1 & P2 ECO 9060	93-7-22	R4
C	REV'D P11 & P12 ECO 9098	93-10-07	PK

SALES DRAWING

REVISION STATUS OF SHEETS

REV.	C	B	A	A	A	A	A	A	A	A	B	B								
SHEET	1	2	3	4	5	6	7	8	9	10	11	12								



P.O. BOX 4422
Santa Barbara, CA 93140-4422

TITLE **GENERAL PURPOSE AEROSPACE
270VDC, 10A VACUUM RELAY**

PREP. BY	OCAMPO	93-1-23	DWG. NO.	AP10A SERIES	
CHKD. BY	Janner	93-1-25			
ENG. APRVL	Kohlmeier	93-1-26	FSCM. NO.	18741	SHEET 1 OF 12

SPECIFICATIONS:

REV.
B

PHYSICAL

CONTACT ARRANGEMENT	SPST-NO
FORM	A

ENVIRONMENTAL

SHOCK, 11 MS 1/2 SINE (g, Peak)	50
VIBRATION, SINUSOIDAL (55-2000 Hz; g PEAK)	10
OPERATING TEMPRATURE (°C)	-55 TO +85
OPERATIONAL ALTITUDE, MAX. (FT.)	80,000

ELECTRICAL

CONTACT RATING	
OPERATING VOLTAGE (Vdc)	270
RATED RESISTIVE LOAD @ 270 VDC (Amps)	10*
LOAD LIFE, MIN. (CYCLES)	10,000
OVERLOAD, SWITCHED (Adc)	20
OVERLOAD CONTACT LIFE, MIN (CYCLES)	50
CONTINUOUS CURRENT CARRY, MAX. (Adc)	SEE TABLE I

TABLE I	ADC
AP10A232, AP10A234, AP10A332, AP10A334, AP10A532, AP10A534 AP10A732, AP10A734, AP10A832, AP10A834, AP10A932, AP10A934 AP10AA57, AP10AB57, AP10AC57	15
AP10A235, AP10A245, AP10A335, AP10A345, AP10A535, AP10A545, AP10AA47, AP10AB47, AP10AC47	10

OTHER DATA

DIELECTRIC STRENGTH AT SEA LEVEL (VRMS)	
COIL TO CASE	500
ALL OTHER POINTS	2,000
DIELECTRIC STRENGTH AT 80,000 FT, ALL POINTS (VRMS)	500
OPERATE TIME, MAX., INCLUDING BOUNCE AT NOMINAL VOLTAGE (ms)	10
RELEASE TIME, MAX. (ms)	10
INSULATION RESISTANCE, 500 Vdc, MIN. (MEGOHMS)	
BEFORE LIFE	100
AFTER LIFE	50
CONTACT RESISTANCE, MAX. (OHMS)	SEE TABLE II

TABLE II	OHMS
AP10A232, AP10A234, AP10A332, AP10A334, AP10A532, AP10A534 AP10A732, AP10A734, AP10A832, AP10A834, AP10A932, AP10A934 AP10AA57, AP10AB57, AP10AC57	.010
AP10A235, AP10A245, AP10A335, AP10A345, AP10A535, AP10A545 AP10AA47, AP10AB47, AP10AC47	.030

COIL DATA

COIL VOLTAGE, NOMINAL (Vdc)	12	28	120
COIL VOLTAGE, MAX. (Vdc)	14	32	140
PICK-UP VOLTAGE, MAX. (Vdc)	10	20	85
DROP-OUT VOLTAGE, (Vdc)	.3-6	.7-12	5-55
COIL RESISTANCE (OHMS \pm 10% @ 25°C)	53	290	4700

NOTES: RATINGS LISTED ARE ACROSS THE OPERATING TEMPERATURE RANGE.

*THE LOAD TERMINALS SHOULD ALWAYS BE CONNECTED AS FOLLOWS: COMMON CONTACT +; OTHER CONTACT -.

DIMENSIONS IN INCHES
(DIMENSIONS IN PARENTHESES ARE IN
MILLIMETERS)

TOLERANCES EXCEPT AS NOTED

.xx = \pm .03

.xxx = \pm .010

\angle x° = \pm 2°

DO NOT SCALE DWG.

Kilovac[®]
Corporation

P.O. BOX 4422
Santa Barbara, CA 93140-4422

AP10A SERIES

CAGE CODE

18741

SCALE

NONE

SHEET

2

PART NUMBER SELECTION

SAMPLE PART NUMBER: AP10 A B 5 7

CONTACT FORM: A = SPST-NO

COIL OPTIONS

- 2 = 12 Vdc - BUS WIRE/PC BOARD (SEE FIGURES 1, 2, 5 & 6)
- 3 = 28 Vdc - BUS WIRE/PC BOARD (SEE FIGURES 1, 2, 5 & 6)
- 5 = 120 Vdc - BUS WIRE/PC BOARD (SEE FIGURES 1, 2, 5 & 6)
- 7 = 12 Vdc - TURRET TERMINAL (SEE FIGURES 3 & 4)
- 8 = 28 Vdc - TURRET TERMINAL (SEE FIGURES 3 & 4)
- 9 = 120 Vdc - TURRET TERMINAL (SEE FIGURES 3 & 4)
- A = 12 Vdc - STUD TERMINAL (SEE FIGURE 7 & 8)
- B = 28 Vdc - STUD TERMINAL (SEE FIGURE 7 & 8)
- C = 120 Vdc - STUD TERMINAL (SEE FIGURE 7 & 8)

POWER TERMINAL OPTIONS

- 3 = SOLDER CONNECTION/PC BOARD (SEE FIGURES 1-5)
- 4 = FLYING LEAD (SEE FIGURES 6 & 7)
- 5 = STUD TERMINAL (SEE FIGURE 8)

MOUNTING OPTIONS

- 2 = FLANGED MOUNT (SEE FIGURES 1 & 3)
- 4 = THROUGH CHASSIS MOUNT (SEE FIGURES 2 & 4)
- 5 = PC BOARD MOUNT (SEE FIGURES 5 & 6)
- 7 = PANEL MOUNT (SEE FIGURE 7 & 8)

DIMENSIONS IN INCHES
(DIMENSIONS IN PARENTHESES ARE IN
MILLIMETERS)

TOLERANCES EXCEPT AS NOTED

.xx = $\pm .03$.xxx = $\pm .010$ \angle x° = $\pm 2^\circ$

DO NOT SCALE DWG.

Kilovac®
Corporation

P.O. BOX 4422
Santa Barbara, CA 93140-4422

AP10A SERIES

CAGE CODE

18741

SCALE


NONE

SHEET

3

SCHEMATIC

(FOR FIGURES 1-4, 7 & 8 ONLY)

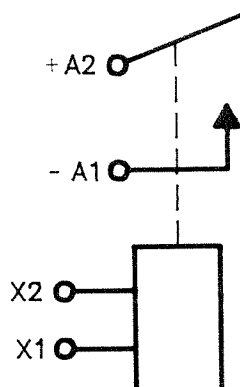

NOTE: ON PANEL MOUNT OPTIONS, COIL TERMINALS ARE POLARIZED AS FOLLOWS: X1 IS NEGATIVE (-), X2 IS POSITIVE (+).

DIMENSIONS IN INCHES
(DIMENSIONS IN PARENTHESES ARE IN
MILLIMETERS)

TOLERANCES EXCEPT AS NOTED

.xx = $\pm .03$

.xxx = $\pm .010$

\angle x° = $\pm 2^\circ$

DO NOT SCALE DWG.

Kilovac[®]
Corporation


P.O. BOX 4422
Santa Barbara, CA 93140-4422

AP10A SERIES

CAGE CODE
18741

SCALE
NONE

SHEET
4

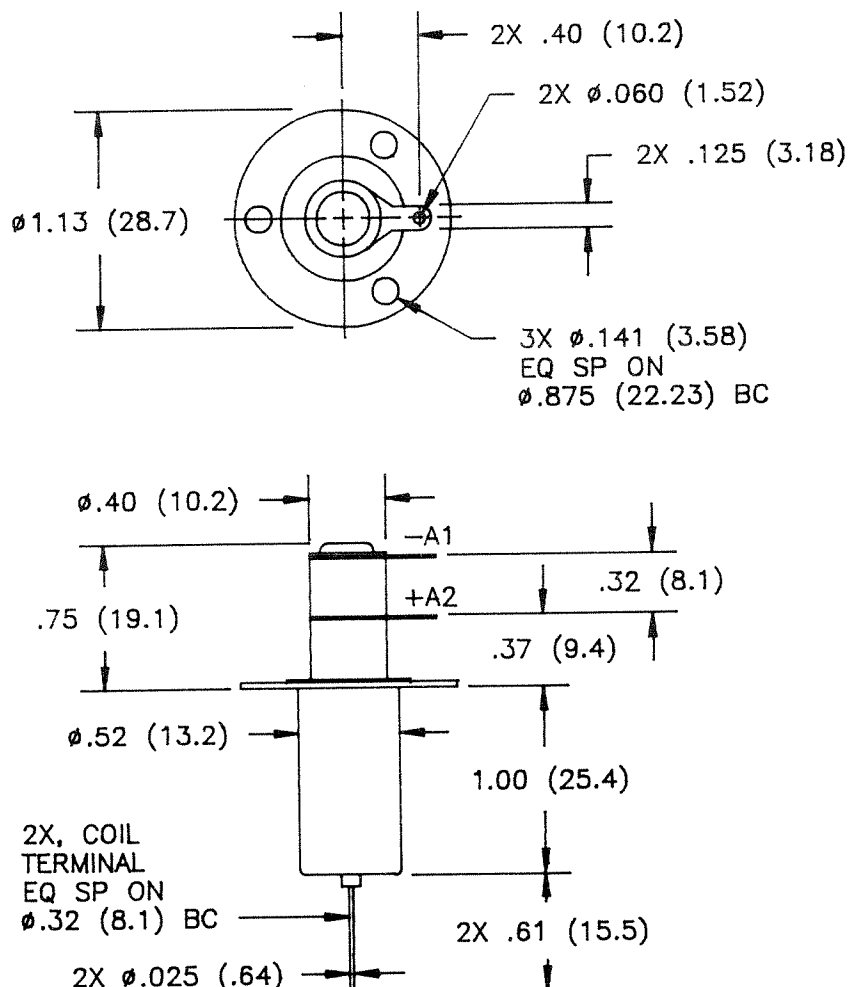

WEIGHT, MAX (oz): 1.00

AVAILABLE OPTIONS:

COIL OPTIONS	POWER TERMINAL OPTIONS	MOUNTING OPTIONS
2 = 12 Vdc - BUS WIRE LEADS	3 = SOLDER CONNECTIONS	2 = FLANGED MOUNT
3 = 28 Vdc - BUS WIRE LEADS		
5 = 120 Vdc - BUS WIRE LEADS		

(PART NUMBER, CONTACT RATINGS, COIL VOLTAGE/RESISTANCE AND SCHEMATIC ARE MARKED ON SIDES OF RELAY.)

FIGURE 1: FLANGED STYLE MOUNTING WITH SOLDER TYPE POWER TERMINALS AND BUS WIRE COIL LEADS

DIMENSIONS IN INCHES
(DIMENSIONS IN PARENTHESES ARE IN
MILLIMETERS)

TOLERANCES EXCEPT AS NOTED

xx = \pm .03

.xxx = \pm .010

\angle x° = \pm 2°

DO NOT SCALE DWG.

Kilovac[®]
Corporation


P.O. BOX 4422
Santa Barbara, CA 93140-4422

AP10A SERIES

CAGE CODE
18741

SCALE
1:1

SHEET
5

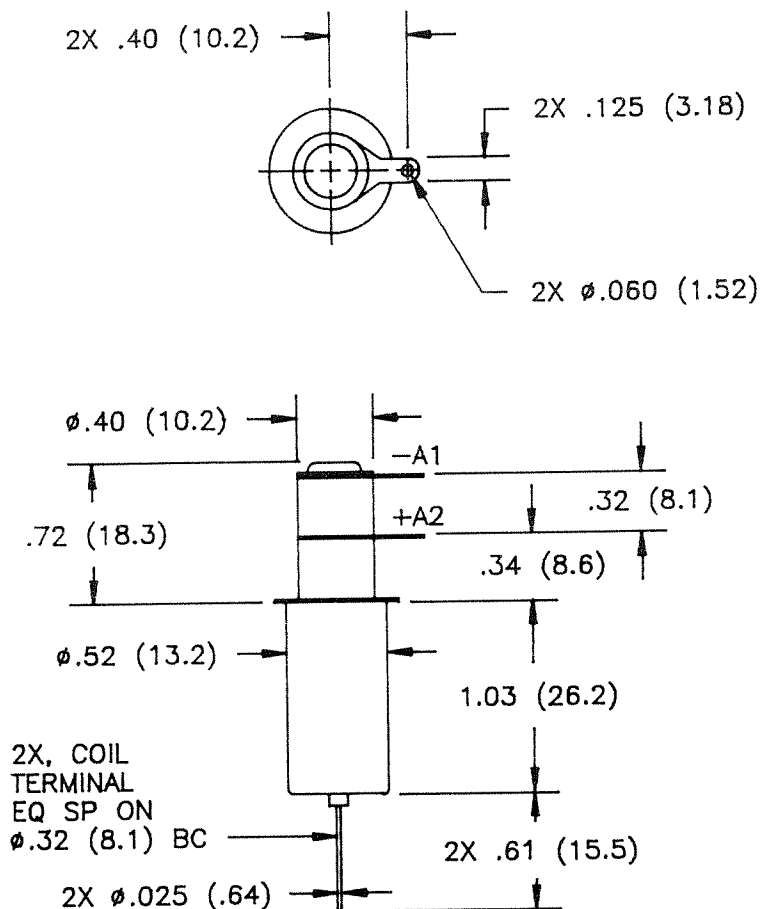

WEIGHT, MAX (oz): 1.00

AVAILABLE OPTIONS:

COIL OPTIONS	POWER TERMINAL OPTIONS	MOUNTING OPTIONS
2 = 12 Vdc - BUS WIRE LEADS	3 = SOLDER CONNECTIONS	4 = THROUGH CHASSIS MOUNT
3 = 28 Vdc - BUS WIRE LEADS		
5 = 120 Vdc - BUS WIRE LEADS		

(PART NUMBER, CONTACT RATINGS, COIL VOLTAGE/RESISTANCE AND SCHEMATIC ARE MARKED ON SIDES OF RELAY.)

FIGURE 2: THROUGH CHASSIS STYLE MOUNTING WITH SOLDER TYPE POWER TERMINALS AND BUS WIRE COIL LEADS

DIMENSIONS IN INCHES
(DIMENSIONS IN PARENTHESES ARE IN
MILLIMETERS)

TOLERANCES EXCEPT AS NOTED

.xx = \pm .03

.xxx = \pm .010

\angle x° = \pm 2°

DO NOT SCALE DWG.

Kilovac[®]
Corporation


P.O. BOX 4422
Santa Barbara, CA 93140-4422

AP10A SERIES

CAGE CODE
18741

SCALE
1:1

SHEET
6

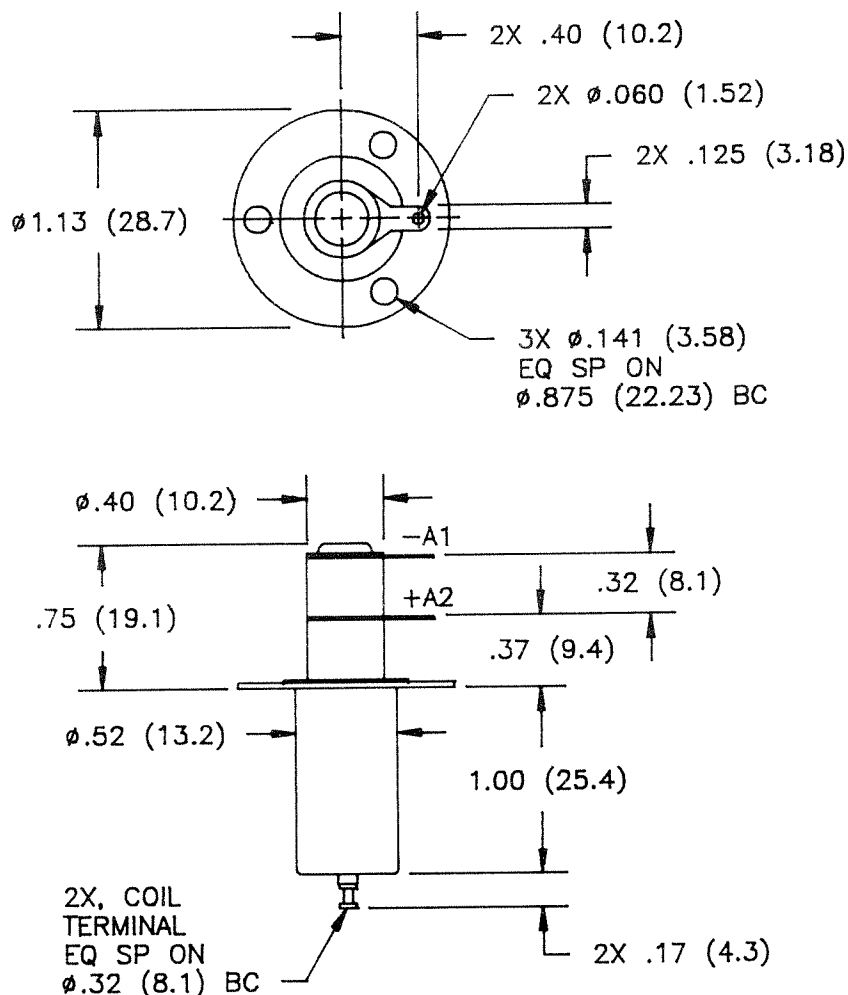

WEIGHT, MAX (oz): 1.00

AVAILABLE OPTIONS:

COIL OPTIONS	POWER TERMINAL OPTIONS	MOUNTING OPTIONS
7 = 12 Vdc - TURRET TERMINALS 8 = 28 Vdc - TURRET TERMINALS 9 = 120 Vdc - TURRET TERMINALS	3 = SOLDER CONNECTIONS	2 = FLANGED MOUNT

(PART NUMBER, CONTACT RATINGS, COIL VOLTAGE/RESISTANCE AND SCHEMATIC ARE MARKED ON SIDES OF RELAY.)

FIGURE 3: FLANGED STYLE MOUNTING WITH SOLDER TYPE POWER TERMINALS AND TURRET COIL TERMINALS

DIMENSIONS IN INCHES
(DIMENSIONS IN PARENTHESES ARE IN
MILLIMETERS)

TOLERANCES EXCEPT AS NOTED

.xx = $\pm .03$

.xxx = $\pm .010$

\angle x° = $\pm 2^\circ$

DO NOT SCALE DWG.

Kilovac[®]
Corporation


P.O. BOX 4422
Santa Barbara, CA 93140-4422

AP10A SERIES

CAGE CODE
18741

SCALE
1:1

SHEET
7

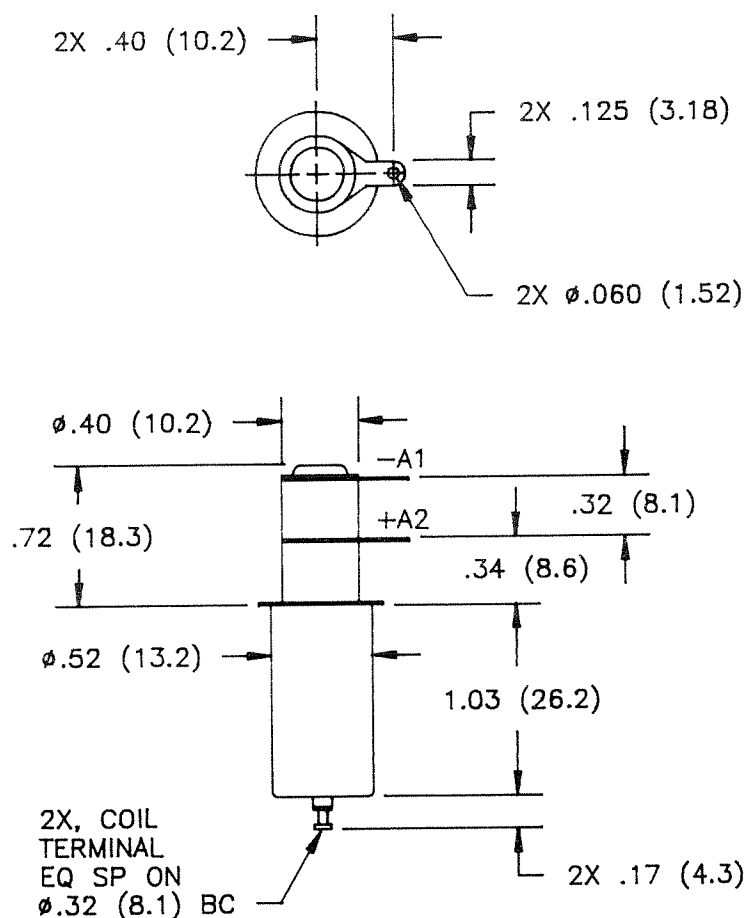

WEIGHT, MAX (oz): 1.00

AVAILABLE OPTIONS:

COIL OPTIONS	POWER TERMINAL OPTIONS	MOUNTING OPTIONS
7 = 12 Vdc - TURRET TERMINALS 8 = 28 Vdc - TURRET TERMINALS 9 = 120 Vdc - TURRET TERMINALS	3 = SOLDER CONNECTIONS	4 = THROUGH CHASSIS MOUNT

(PART NUMBER, CONTACT RATINGS, COIL VOLTAGE/RESISTANCE AND SCHEMATIC ARE MARKED ON SIDES OF RELAY.)

FIGURE 4: THROUGH CHASSIS STYLE MOUNTING WITH SOLDER TYPE POWER TERMINALS AND TURRET COIL TERMINALS

DIMENSIONS IN INCHES
(DIMENSIONS IN PARENTHESES ARE IN MILLIMETERS)

TOLERANCES EXCEPT AS NOTED

.xx = \pm .03

.xxx = \pm .010

\angle x° = \pm 2°

DO NOT SCALE DWG.

Kilovac[®]
Corporation


P.O. BOX 4422
Santa Barbara, CA 93140-4422

AP10A SERIES


CAGE CODE
18741

SCALE
1:1

SHEET
8

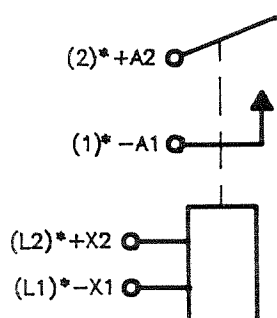SCHEMATIC

*HARDWARE MARKING
WILL BE AS SHOWN
IN PARENTHESES.

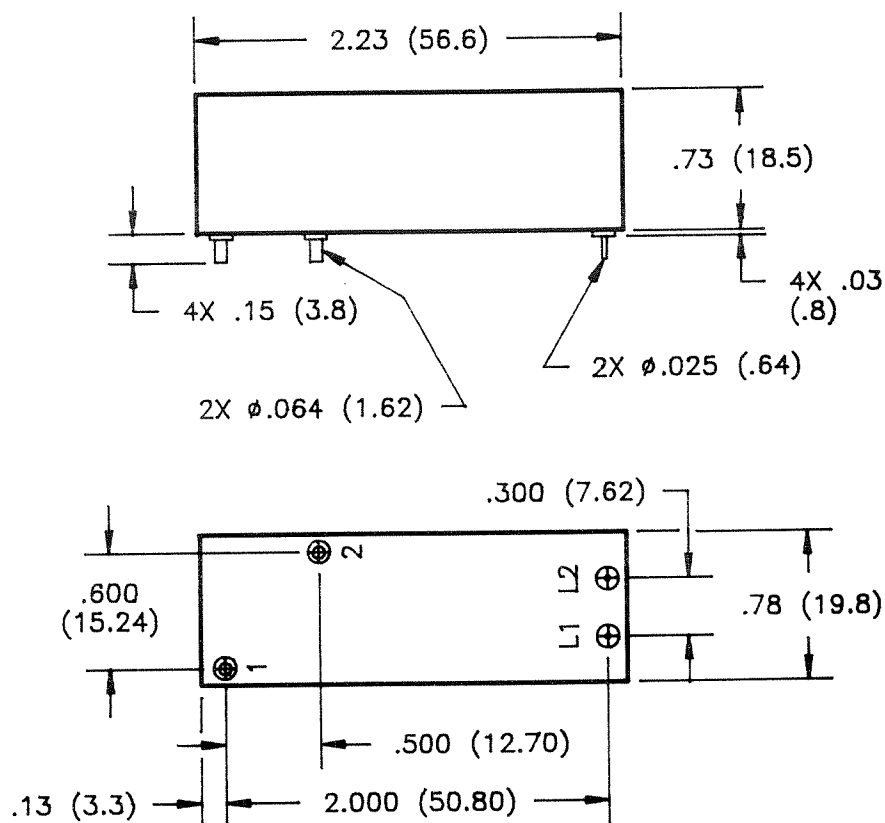

WEIGHT, MAX (oz): 2.00

AVAILABLE OPTIONS:

COIL OPTIONS	POWER TERMINAL OPTIONS	MOUNTING OPTIONS
2 = 12 Vdc - PCB TERMINALS	3 = PCB TERMINALS	5 = PCB MOUNT
3 = 28 Vdc - PCB TERMINALS		
5 = 120 Vdc - PCB TERMINALS		

(PART NUMBER, CONTACT RATINGS, COIL VOLTAGE/RESISTANCE AND SCHEMATIC ARE MARKED ON SIDES OF RELAY.)

FIGURE 5: PC BOARD STYLE MOUNTING WITH PC BOARD TERMINALS

DIMENSIONS IN INCHES
(DIMENSIONS IN PARENTHESES ARE IN
MILLIMETERS)

TOLERANCES EXCEPT AS NOTED

.xx = \pm .03

.xxx = \pm .010

\angle x° = \pm 2°

DO NOT SCALE DWG.

Kilovac[®]
Corporation


P.O. BOX 4422
Santa Barbara, CA 93140-4422

AP10A SERIES

CAGE CODE
18741

SCALE
1:1

SHEET
9

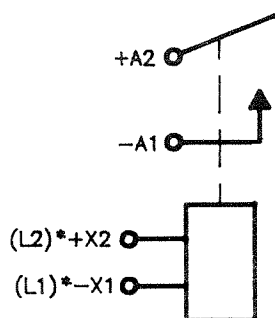SCHEMATIC

*HARDWARE MARKING WILL BE
AS SHOWN IN PARENTHESES.

NOTES:

1. TERMINALS 1 AND 2 ARE
FOR MOUNTING ONLY,
THEY ARE NOT ELECTRICALLY
CONNECTED.


WEIGHT, MAX (oz): 2.00

AVAILABLE OPTIONS:

COIL OPTIONS	POWER TERMINAL OPTIONS	MOUNTING OPTIONS
2 = 12 Vdc - PCB TERMINALS 3 = 28 Vdc - PCB TERMINALS 5 = 120 Vdc - PCB TERMINALS	4 = FLYING LEADS	5 = PCB MOUNT

(PART NUMBER, CONTACT RATINGS, COIL VOLTAGE/RESISTANCE AND SCHEMATIC ARE MARKED ON SIDES OF RELAY.)

FIGURE 6: PC BOARD STYLE MOUNTING FLYING POWER LEADS

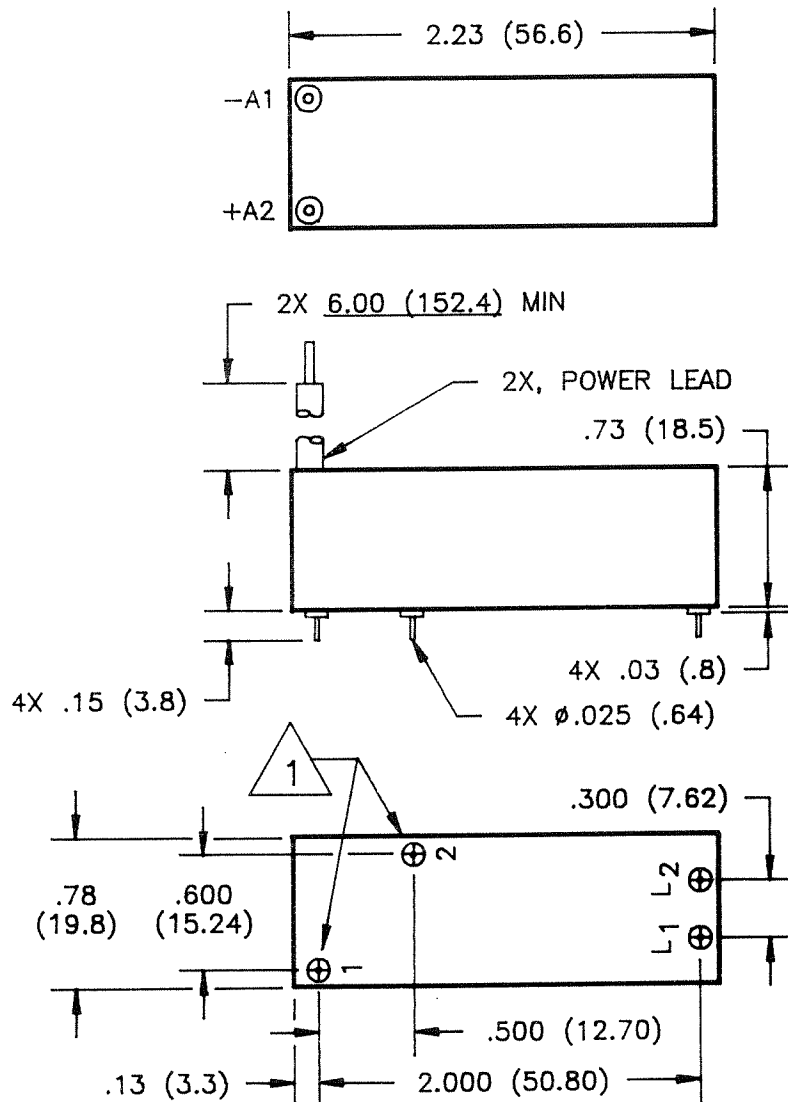

DIMENSIONS IN INCHES
(DIMENSIONS IN PARENTHESES ARE IN
MILLIMETERS)

TOLERANCES EXCEPT AS NOTED

.xx = ± .03

.xxx = ± .010

⌵ x° = ± 2°

DO NOT SCALE DWG.

Kilovac[®]
Corporation

P.O. BOX 4422
Santa Barbara, CA 93140-4422


AP10A SERIES

CAGE CODE
18741


SCALE
1:1

SHEET
10

REV.
B

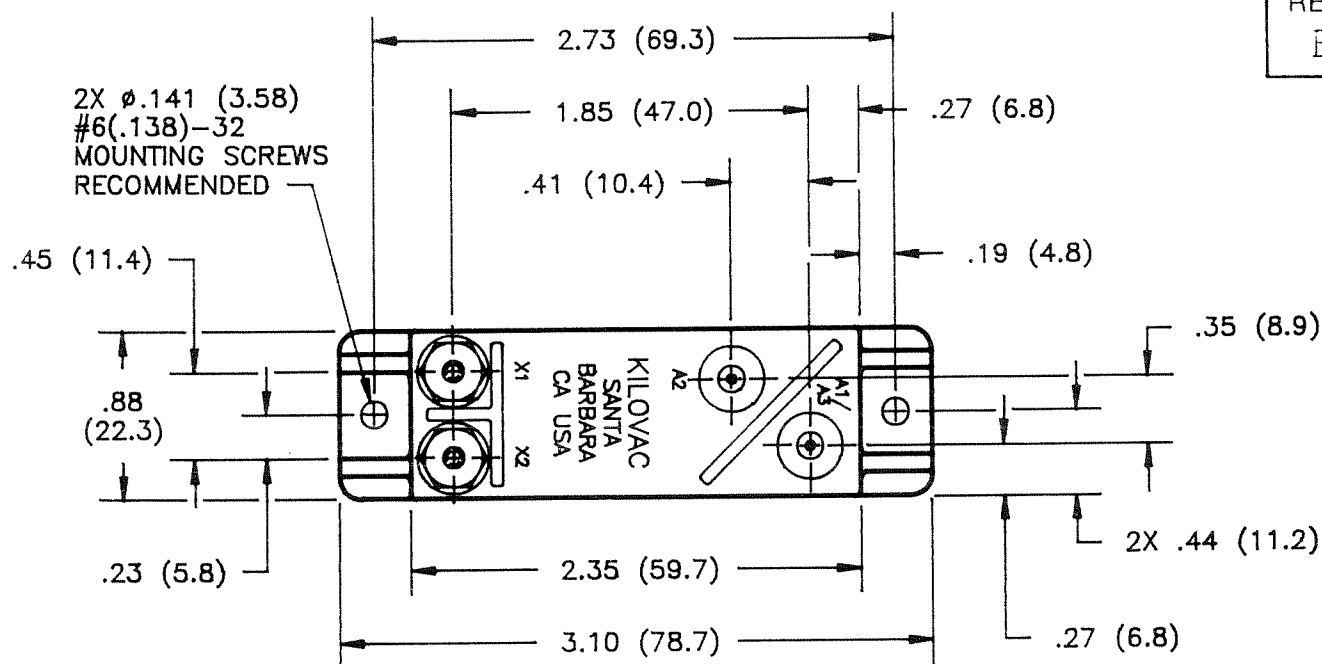

2X #4(.112)-40 UNC-2A (EACH WITH
HEX NUT, LOCKWASHER & FLAT WASHER)
TORQUE (MAX): 4.4 LB-IN

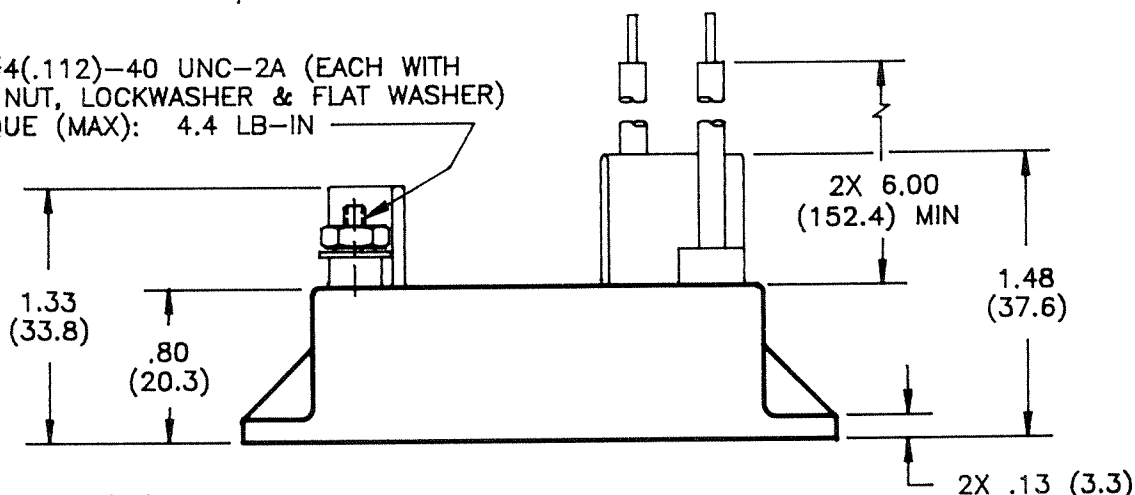

WEIGHT, MAX (oz): 2.00

AVAILABLE OPTIONS:

COIL OPTIONS	POWER TERMINAL OPTIONS	MOUNTING OPTIONS
A = 12 Vdc - STUD TERMINALS	4 = FLYING LEADS	7 = PANEL MOUNT
B = 28 Vdc - STUD TERMINALS		
C = 120 Vdc - STUD TERMINALS		

(PART NUMBER, CONTACT RATINGS, COIL VOLTAGE/RESISTANCE AND SCHEMATIC ARE MARKED ON SIDES OF RELAY.)

FIGURE 7: PANEL STYLE MOUNTING WITH FLYING POWER LEADS
AND STUD COIL TERMINALS

DIMENSIONS IN INCHES
(DIMENSIONS IN PARENTHESES ARE IN
MILLIMETERS)

TOLERANCES EXCEPT AS NOTED

.xx = $\pm .03$

.xxx = $\pm .010$

\angle x° = $\pm 2^\circ$

DO NOT SCALE DWG.

Kilovac
Corporation


P.O. BOX 4422
Santa Barbara, CA 93140-4422

AP10A SERIES

CAGE CODE
18741


SCALE
1:1

SHEET
11

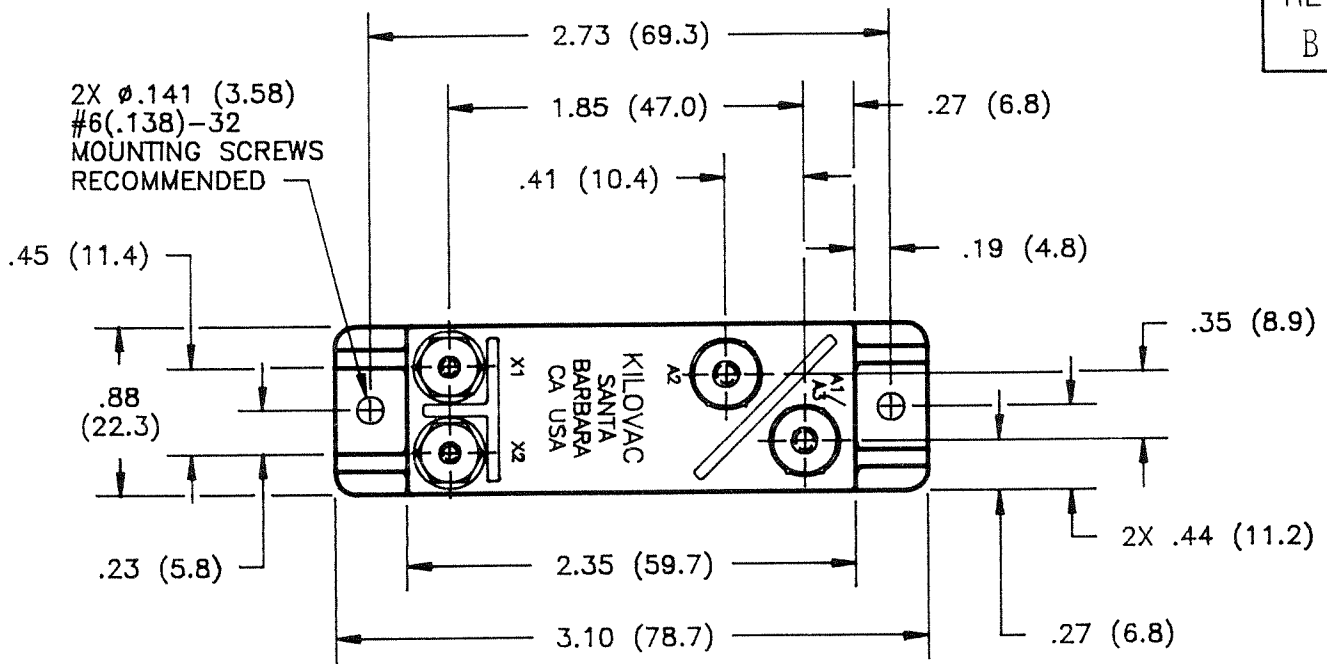

2X #4(.112)-40 UNC-2A (EACH WITH
HEX NUT, LOCKWASHER & FLAT WASHER)
TORQUE (MAX): 4.4 LB-IN

2X #6(.138)-32 UNC-2A (EACH WITH
HEX NUT, LOCKWASHER & FLAT WASHER)
TORQUE (MAX): 10 LB-IN

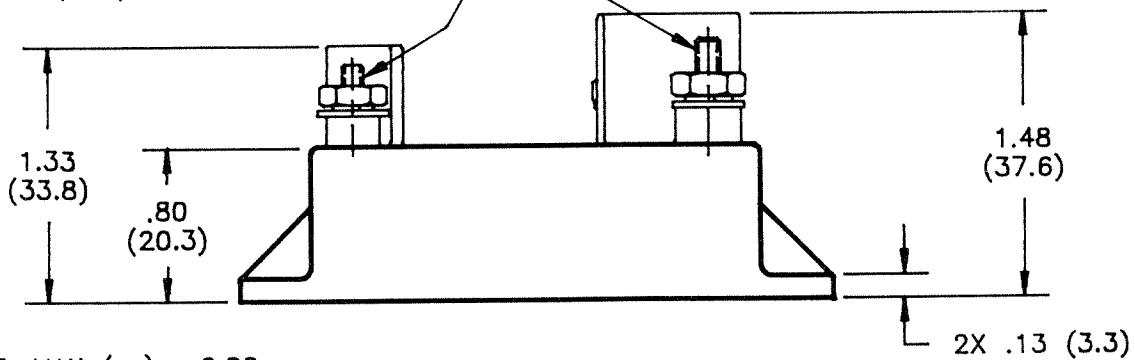

WEIGHT, MAX (oz): 2.00

AVAILABLE OPTIONS:

COIL OPTIONS	POWER TERMINAL OPTIONS	MOUNTING OPTIONS
A = 12 Vdc - STUD TERMINALS B = 28 Vdc - STUD TERMINALS C = 120 Vdc - STUD TERMINALS	5 = STUD TERMINALS	7 = PANEL MOUNT

(PART NUMBER, CONTACT RATINGS, COIL VOLTAGE/RESISTANCE AND SCHEMATIC ARE MARKED ON SIDES OF RELAY.)

FIGURE 8: PANEL STYLE MOUNTING WITH STUD TERMINALS

DIMENSIONS IN INCHES
(DIMENSIONS IN PARENTHESES ARE IN
MILLIMETERS)

TOLERANCES EXCEPT AS NOTED

.xx = $\pm .03$

.xxx = $\pm .010$

$\angle x^\circ = \pm 2^\circ$

DO NOT SCALE DWG.

Kilovac[®]
Corporation

P.O. BOX 4422
Santa Barbara, CA 93140-4422

AP10A SERIES

CAGE CODE
18741

SCALE
1:1

SHEET
12