REVISIONS						
REV.		DESCRIPTIO	DATE	APPROVED		
А	INITIAL	RELEASE	NPR	9051	93-08-02	Kohlmeier

## SALES DRAWING

	REVISION STATUS OF SHEETS																			
REV.	А	Α	Α	А	Α	А	Α	A	Α	Α	Α	А								
SHEET	1	2	3	4	5	6	7	8	9	10	11	12								
REV.	STAT	us c	F SH	EETS	3			==				9)			PΩ	BOX	442	2		
REV.							<b>1000</b> 8 P.O. BOX 4422  Santa Barbara, CA 93140-4422													
SHEET											orporation								A 01	
REV.						TITL	TITLE GENERAL PURPOSE AEROSPACE 270VDC, 10A VACUUM RELAY													
SHEET								27	'OV	DC	,	1 UP	<del></del>	VA	<u>. U</u>	UM	<u> </u>	751	AI	
PREP. BY	, T	ANNE	.R 9	3-07	-23	DWG	DWG. NO. AP10B SERIES													
CHKD. B	Y Ko	hlme	ier	93. oE	-02	AI TOD SERIES														
						CAC	GE CO	DE	4.	o = 1	i na		SH	IEET		1		OF	1:	2
ENG. APF	RVL.	ohlo	mean.	93.08	3.02				1	874	-1					•				

### rev. A

### SPECIFICATIONS:

1	2	н	Υ	S	ŀ	c	Α	١

CONTACT ARRANGEMENT	SPST-NC
FORM	В
ENVIRONMENTAL	
SHOCK, 11 MS 1/2 SINE (g, Peak)	50
VIBRATION, SINUSOIDAL (55-2000 Hz; g PEAK)	10
OPERATING TEMPERATURE (°C)	-55 TO +85
OPERATIONAL ALTITUDE, MAX. (FT.)	80,000
LECTRICAL	
The state of the s	Į.

TRICAL	
CONTACT RATING	
OPERATING VOLTAGE (Vdc)	270
RATED RESISTIVE LOAD @ 270 VDC (Amps)	10*
LOAD LIFE, MIN. (CYCLES)**	7,000
OVERLOAD, SWITCHED (Adc)	20
OVERLOAD CONTACT LIFE, MIN (CYCLES)	50
CONTINUOUS CURRENT CARRY, MAX. (Adc)	SEE TABLE I

TABLE I	ADC
AP10B232, AP10B234, AP10B332, AP10B334, AP10B532, AP10B534	15
AP10B732, AP10B734, AP10B832, AP10B834, AP10B932, AP10B934	
AP10BA57, AP10BB57, AP10BC57	
AP10B235, AP10B245, AP10B335, AP10B345, AP10B535, AP10B545,	10
AP10BA47, AP10BB47, AP10BC47	

#### OTHER DATA

OTHER DATA	
DIELECTRIC STRENGTH AT SEA LEVEL (VRMS)	
COIL TO CASE	500
ALL OTHER POINTS	2,000
DIELECTRIC STRENGTH AT 80,000 FT, ALL POINTS (VRMS)	500
OPERATE TIME, MAX., INCLUDING BOUNCE AT NOMINAL VOLTAGE (ms)	10
RELEASE TIME, MAX. (ms)	10
INSULATION RESISTANCE, 500 Vdc, MIN. (MEGOHMS)	
BEFORE LIFE	100
AFTER LIFE	50
CONTACT RESISTANCE, MAX. (OHMS)	SEE TABLE II

TABLE II	OHMS
AP10B232, AP10B234, AP10B332, AP10B334, AP10B532, AP10B534	.010
AP10B732, AP10B734, AP10B832, AP10B834, AP10B932, AP10B934	
AP10BA57, AP10BB57, AP10BC57	
AP10B235, AP10B245, AP10B335, AP10B345. AP10B535, AP10B545	.030
AP10BA47, AP10BB47, AP10BC47	

#### COIL DATA

COIL DATA			T
COIL VOLTAGE, NOMINAL (Vdc)	12	28	120
COIL VOLTAGE, MAX. (Vdc)	14	32	140
PICK-UP VOLTAGE, MAX. (Vdc)	10	20	85
DROP-OUT VOLTAGE, (Vdc)	.3-6	.7-12	5-55
COIL RESISTANCE (OHMS ± 10% @ 25°C)	53	290	4700
COIL RESISTANCE (Univisition @ 25 C)			

NOTES: RATINGS LISTED ARE ACROSS THE OPERATING TEMPERATURE RANGE.

\*THE LOAD TERMINALS SHOULD ALWAYS BE CONNECTED AS FOLLOWS: COMMON CONTACT +; OTHER CONTACT -.

### **DIMENSIONS IN INCHES**

(DIMENSIONS IN PARENTHESES ARE IN MILLIMETERS)

TOLERANCES EXCEPT AS NOTED

 $.xx = \pm .03$  $.xxx = \pm .010$ 

 $x^{\circ} = \pm 2^{\circ}$ DO NOT SCALE DWG.



P.O. BOX 4422 Santa Barbara, CA 93140-4422

## AP10B SERIES

cage code 18741 SCALE

NONE

SHEET

<sup>\*\*</sup>USING WEIBULL RELIABILITY AT 95%. SEE ALSO LOAD LIFE GRAPH ON SHEET 4.

## PART NUMBER SELECTION

SAMPLE PART NUMBER: AP10 B B 5 7
CONTACT FORM: B = SPST-NC
COIL OPTIONS  2 = 12 Vdc - BUS WIRE/PC BOARD (SEE FIGURES 1, 2, 5 & 6) 3 = 28 Vdc - BUS WIRE/PC BOARD (SEE FIGURES 1, 2, 5 & 6) 5 = 120 Vdc - BUS WIRE/PC BOARD (SEE FIGURES 1, 2, 5 & 6) 7 = 12 Vdc - TURRET TERMINAL (SEE FIGURES 3 & 4) 8 = 28 Vdc - TURRET TERMINAL (SEE FIGURES 3 & 4) 9 = 120 Vdc - TURRET TERMINAL (SEE FIGURES 3 & 4) A = 12 Vdc - STUD TERMINAL (SEE FIGURE 7 & 8) B = 28 Vdc - STUD TERMINAL (SEE FIGURE 7 & 8) C = 120 Vdc - STUD TERMINAL (SEE FIGURE 7 & 8)
POWER TERMINAL OPTIONS  3 = SOLDER CONNECTION/PC BOARD (SEE FIGURES 1-5)  4 = FLYING LEAD (SEE FIGURES 6 & 7)  5 = STUD TERMINAL (SEE FIGURE 8)
MOUNTING OPTIONS  2 = FLANGED MOUNT (SEE FIGURES 1 & 3)  4 = THROUGH CHASSIS MOUNT (SEE FIGURES 2 & 4)  5 = PC BOARD MOUNT (SEE FIGURES 5 & 6)

### DIMENSIONS IN INCHES

(DIMENSIONS IN PARENTHESES ARE IN MILLIMETERS)

TOLERANCES EXCEPT AS NOTED

 $.xx = \pm .03$ 

 $\begin{array}{cccc} .xxx & = & \pm & .010 \\ & & & \\ & & & \\ & & & \\ \end{array}$ DO NOT SCALE DWG.



P.O. BOX 4422 Santa Barbara, CA 93140-4422

## AP10B SERIES

CAGE CODE 18741

7 = PANEL MOUNT (SEE FIGURE 7 & 8)


SCALE

NONE

SHEET

### SCHEMATIC


(FOR FIGURES 1-4, 7 & 8 ONLY)



NOTE: ON PANEL MOUNT OPTIONS, COIL TERMINALS ARE POLARIZED AS FOLLOWS: X1 IS NEGATIVE (-), X2 IS POSITIVE (+).

### AP10B

Failure Rate vs. Rated Resistive Load Life at 10 A, 270 Vdc

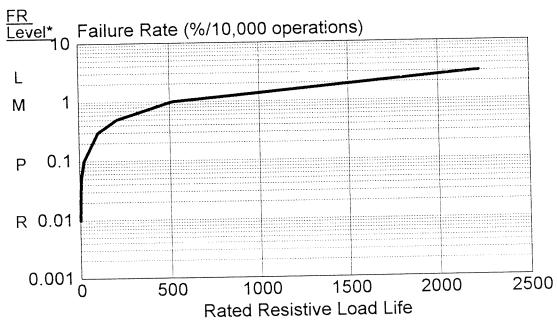

\* Failure Rate letter designations per MIL-STD-690

## DIMENSIONS IN INCHES (DIMENSIONS IN PARENTHESES ARE IN MILLIMETERS)

TOLERANCES EXCEPT AS NOTED

$$.xx = \pm .03$$
  
 $.xxx = \pm .010$ 

$$x^{\circ} = \pm 2^{\circ}$$
DO NOT SCALE DWG.


Kilovac®


P.O. BOX 4422 Santa Barbara, CA 93140-4422

## AP10B SERIES

CAGE CODE 18741 SCALE NONE

SHEET

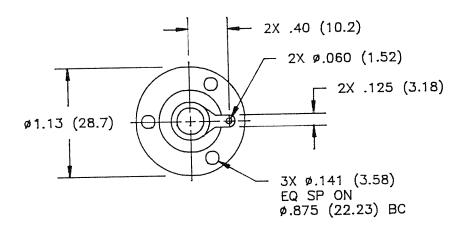

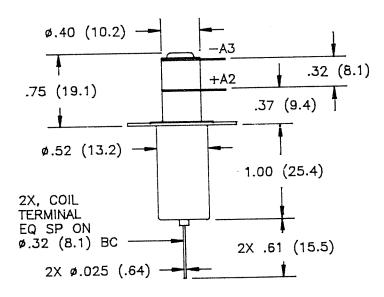

### AVAILABLE OPTIONS:

01 110119				
COIL OPTIONS	POWER TERMINAL OPTIONS	MOUNTING OPTIONS		
2 = 12 Vdc - BUS WIRE LEADS 3 = 28 Vdc - BUS WIRE LEADS 5 = 120 Vdc - BUS WIRE LEADS		2 = FLANGED MOUNT		

(PART NUMBER, CONTACT RATINGS, COIL VOLTAGE/RESISTANCE AND SCHEMATIC ARE MARKED ON SIDES OF RELAY.)

FIGURE 1: FLANGED STYLE MOUNTING WITH SOLDER TYPE POWER TERMINALS AND BUS WIRE COIL LEADS

## DIMENSIONS IN INCHES (DIMENSIONS IN PARENTHESES ARE IN MILLIMETERS)

TOLERANCES EXCEPT AS NOTED


$$.xx = \pm .03$$
  
 $.xxx = \pm .010$   
 $xxx = \pm .02$   
 $xxx = \pm .02$   
DO NOT SCALE DWG.


	Ol	ac <sup>®</sup>
_	 _	Corporation

P.O. BOX 4422 Santa Barbara, CA 93140-4422

## AP10B SERIES

CAGE CODE 18741	SCALE	1:1	SHEET	5

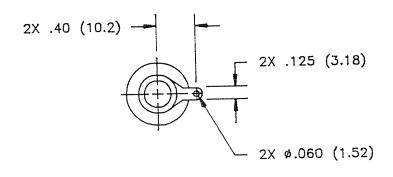

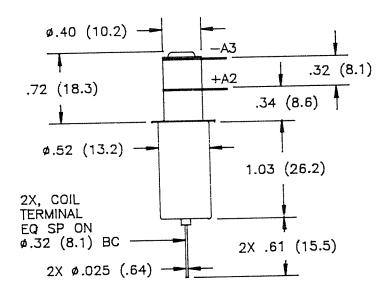

### AVAILABLE OPTIONS:

1 110119		
COIL OPTIONS	POWER TERMINAL OPTIONS	MOUNTING OPTIONS
2 = 12 Vdc - BUS WIRE LEADS 3 = 28 Vdc - BUS WIRE LEADS 5 = 120 Vdc - BUS WIRE LEADS	3 = SOLDER CONNECTIONS	4 = THROUGH CHASSIS MOUNT

(PART NUMBER, CONTACT RATINGS, COIL VOLTAGE/RESISTANCE AND SCHEMATIC ARE MARKED ON SIDES OF RELAY.)

FIGURE 2: THROUGH CHASSIS STYLE MOUNTING WITH SOLDER TYPE POWER TERMINALS AND BUS WIRE COIL LEADS

### DIMENSIONS IN INCHES

(DIMENSIONS IN PARENTHESES ARE IN MILLIMETERS)

TOLERANCES EXCEPT AS NOTED

$$.xx = \pm .03$$
  
 $.xxx = \pm .010$   
 $x^2 = \pm .2^\circ$   
DO NOT SCALE DWG.


## Kilovac®


P.O. BOX 4422 Santa Barbara, CA 93140-4422

## AP10B SERIES

CAGE CODE 18741 SCALE **1:1** 

SHEET

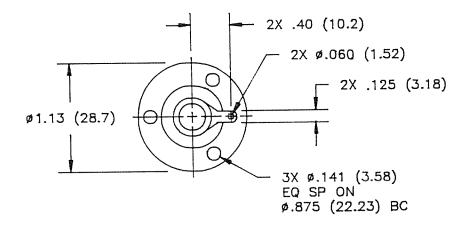

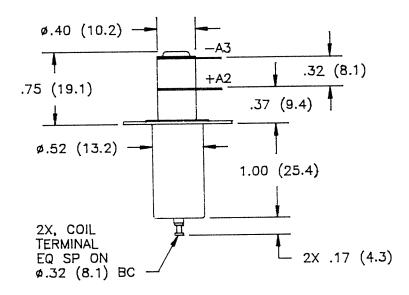

### AVAILABLE OPTIONS:

COIL OPTIONS	POWER TERMINAL OPTIONS	MOUNTING OPTIONS
7 = 12 Vdc - TURRET TERMINALS 8 = 28 Vdc - TURRET TERMINALS 9 = 120 Vdc - TURRET TERMINALS		2 = FLANGED MOUNT

(PART NUMBER, CONTACT RATINGS, COIL VOLTAGE/RESISTANCE AND SCHEMATIC ARE MARKED ON SIDES OF RELAY.)

FIGURE 3: FLANGED STYLE MOUNTING WITH SOLDER TYPE POWER TERMINALS AND TURRET COIL TERMINALS

## DIMENSIONS IN INCHES (DIMENSIONS IN PARENTHESES ARE IN

DIMENSIONS IN PARENTHESES ARE II MILLIMETERS)

TOLERANCES EXCEPT AS NOTED


$$.xx = \pm .03$$
  
 $.xxx = \pm .010$   
 $x = \pm .000$   
DO NOT SCALE DWG.


## Kilovac®

P.O. BOX 4422 Santa Barbara, CA 93140-4422

### AP10B SERIES

CAGE CODE 18741	SCALE	1:1	SHEET	7

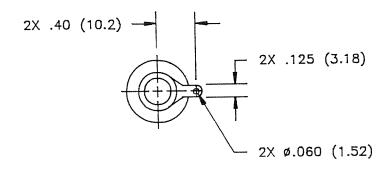

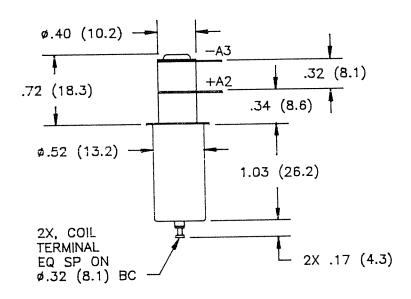

### AVAILABLE OPTIONS:

COIL OPTIONS	POWER TERMINAL OPTIONS	MOUNTING OPTIONS
7 = 12 Vdc - TURRET TERMINALS 8 = 28 Vdc - TURRET TERMINALS 9 = 120 Vdc - TURRET TERMINALS		4 = THROUGH CHASSIS MOUNT

(PART NUMBER, CONTACT RATINGS, COIL VOLTAGE/RESISTANCE AND SCHEMATIC ARE MARKED ON SIDES OF RELAY.)

FIGURE 4: THROUGH CHASSIS STYLE MOUNTING WITH SOLDER TYPE POWER TERMINALS AND TURRET COIL TERMINALS

## DIMENSIONS IN INCHES

(DIMENSIONS IN PARENTHESES ARE IN MILLIMETERS)

TOLERANCES EXCEPT AS NOTED

$$.xx = \pm .03$$
  
 $.xxx = \pm .010$   
 $x^{\circ} = \pm .2^{\circ}$   
DO NOT SCALE DWG.


## **Kilovac**®

P.O. BOX 4422 Santa Barbara, CA 93140-4422


### AP10B SERIES


CAGE CODE 18741	SCALE 1:1	SHEET 8
--------------------	-----------	---------

### **SCHEMATIC**



\*HARDWARE MARKING WILL BE AS SHOWN IN PARENTHESES.

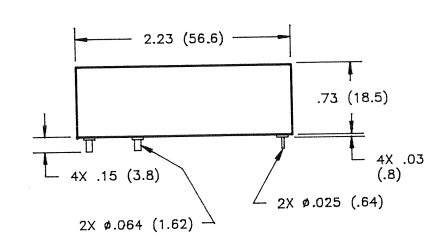

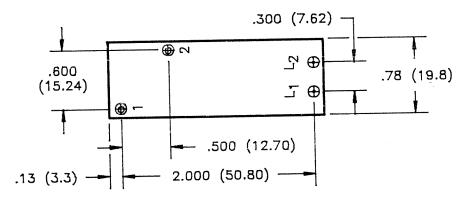

WEIGHT, MAX (oz): 2.00

### AVAILABLE OPTIONS:

COIL OPTIONS	POWER TERMINAL OPTIONS	MOUNTING OPTIONS
2 = 12 Vdc - PCB TERMINALS 3 = 28 Vdc - PCB TERMINALS 5 = 120 Vdc - PCB TERMINALS	3 = PCB TERMINALS	5 = PCB MOUNT

(PART NUMBER, CONTACT RATINGS, COIL VOLTAGE/RESISTANCE AND SCHEMATIC ARE MARKED ON SIDES OF RELAY.)

FIGURE 5: PC BOARD STYLE MOUNTING WITH PC BOARD TERMINALS

### DIMENSIONS IN INCHES

(DIMENSIONS IN PARENTHESES ARE IN MILLIMETERS)

TOLERANCES EXCEPT AS NOTED

$$.xx = \pm .03$$
  
 $.xxx = \pm .010$   
 $x^{\circ} = \pm .2^{\circ}$   
DO NOT SCALE DWG.

P.O. BOX 4422 Santa Barbara, CA 93140-4422


## AP10B SERIES

1:1

cage code 18741 SCALE

SHEET

### **SCHEMATIC**



\*HARDWARE MARKING WILL BE AS SHOWN IN PARENTHESES.

#### NOTES:

1.

TERMINALS 1 AND 2 ARE FOR MOUNTING ONLY, THEY ARE NOT ELECTRICALLY CONNECTED.

WEIGHT, MAX (oz): 2.00

### AVAILABLE OPTIONS:

T	HUNG.		
	COIL OPTIONS	POWER TERMINAL OPTIONS	MOUNTING OPTIONS
	2 = 12 Vdc - PCB TERMINALS 3 = 28 Vdc - PCB TERMINALS 5 = 120 Vdc - PCB TERMINALS	4 = FLYING LEADS	5 = PCB MOUNT

.13 (3.3)

.600 (15.24)

4x .15 (3.8)

.78

(19.8)

(PART NUMBER, CONTACT RATINGS, COIL VOLTAGE/RESISTANCE AND SCHEMATIC ARE MARKED ON SIDES OF RELAY.)

FIGURE 6: PC BOARD STYLE MOUNTING FLYING POWER LEADS

### DIMENSIONS IN INCHES

(DIMENSIONS IN PARENTHESES ARE IN MILLIMETERS)

TOLERANCES EXCEPT AS NOTED

$$.xx = \pm .03$$
  
 $.xxx = \pm .010$   
 $x^{\circ} = \pm 2^{\circ}$   
DO NOT SCALE DWG.

# Klovac®

P.O. BOX 4422 Santa Barbara, CA 93140-4422

## AP10B SERIES

cage code 18741 SCALE

1:1 | SHEET

10

REV. A

2.23 (56.6) —

2X, POWER LEAD

.73 (18.5) -

4X .03 (.8)

.300 (7.62)

₽<sub>2</sub>

4X ø.025 (.64)

- .500 (12.70)


- 2.000 (50.80) -

2X 6.00 (152.4) MIN

**A** 64

-A3 (0)


+A2 |@

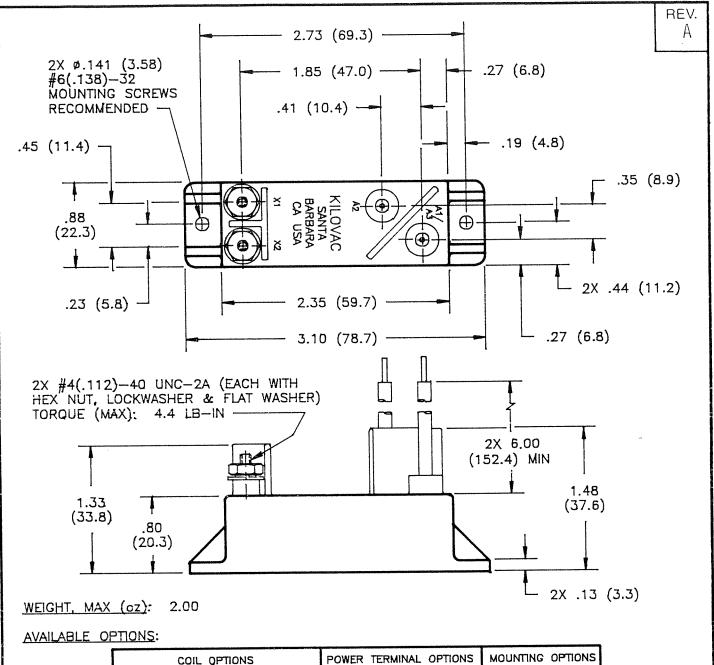


COIL OPTIONS	POWER TERMINAL OPTIONS	MOUNTING OPTIONS
A = 12 Vdc - STUD TERMINALS B = 28 Vdc - STUD TERMINALS C = 125 Vdc - STUD TERMINALS	4 = FLYING LEADS	7 = PANEL MOUNT

(PART NUMBER, CONTACT RATINGS, COIL VOLTAGE/RESISTANCE AND SCHEMATIC ARE MARKED ON SIDES OF RELAY.)

FIGURE 7: PANEL STYLE MOUNTING WITH FLYING POWER LEADS AND STUD COIL TERMINALS

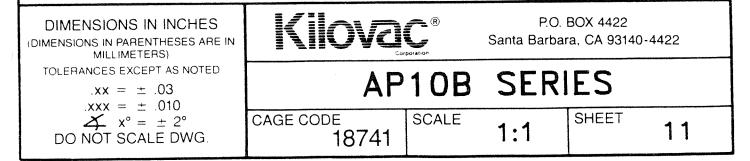

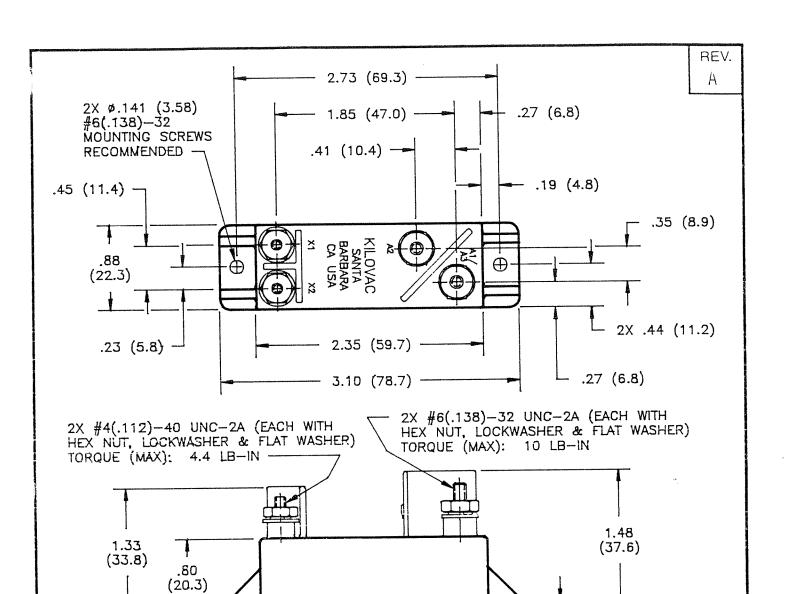

#### AVAILABLE OPTIONS:

COIL OPTIONS	POWER TERMINAL OPTIONS	MOUNTING OPTIONS		
A = 12 Vdc - STUD TERMINALS B = 28 Vdc - STUD TERMINALS C = 125 Vdc - STUD TERMINALS	5 = STUD TERMINALS	7 = PANEL MOUNT		

(PART NUMBER, CONTACT RATINGS, COIL VOLTAGE/RESISTANCE AND SCHEMATIC ARE MARKED ON SIDES OF RELAY.)

FIGURE 8: PANEL STYLE MOUNTING WITH STUD TERMINALS

### DIMENSIONS IN INCHES

(DIMENSIONS IN PARENTHESES ARE IN MILLIMETERS)

TOLERANCES EXCEPT AS NOTED

$$.xx = \pm .03$$

$$xxx = \pm .010$$

$$x^{\circ} = \pm 2^{\circ}$$

DO NÓT SCALE DWG.



P.O. BOX 4422 Santa Barbara, CA 93140-4422

2X .13 (3.3)

## AP10B SERIES

cage code 18741 SCALE **1:1** 

SHEET