



# 5G/4G/3G/2G, NB-IoT, Cat-M, GNSS WORLD BAND COMBINATION ANTENNA

Part Numbers: 2108783-1, 2108783-2

#### FEATURES & BENEFITS


- Omnidirectional coverage
- On board SMD PCB antenna
- Wide Band coverage for 3G, 4G and 5G with GNSS
- Bandwidth and performance dependent on ground plane size/ design suggested minimum ground plane length from antenna feed is 150mm
- Available in Tape & Reel packaging for automatic mounting


## **SPECIFICATIONS**

data might vary


Frequency Range (MHz)	617-920	1427-1608	1710-2900	3300-3800
VSWR	< 2.5:1	< 2.0:1	< 2.7:1	< 2.1:1
Average Efficiency	61.2%	70.0%	53.0%	53.8%
Peak Gain	2.0dBi	3.3dBi	2.7dBi	4.9dBi
Average Gain	-2.1dBi	-1.5dBi	-2.8dBi	-2.7dBi
Power Handling	5 Watt cw			
Feed Point Impedance	50 ohms unbalanced			
Polarization	Linear			
Size	38.0 mm x 7.5 mm x 3.2 mm			
Weight	< 1.5 g			
Mounting	Surface mount			
Operating Temperature	-40 to +85°C			
Storage Temperature	-40 to +85°C			
Packaging Specification	Bag & Box / Tape & Reel			
Hazardous Materials	A certificate of conformance is available from the product page on TE website.			
Data measured in free space	e and on reference gre	ound plane of 150 m	m length and 45.0 mm	width, application

#### **RF DATA**

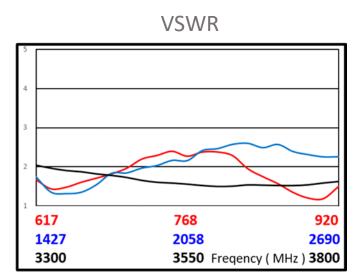





Efficiency vs. Ground plane size

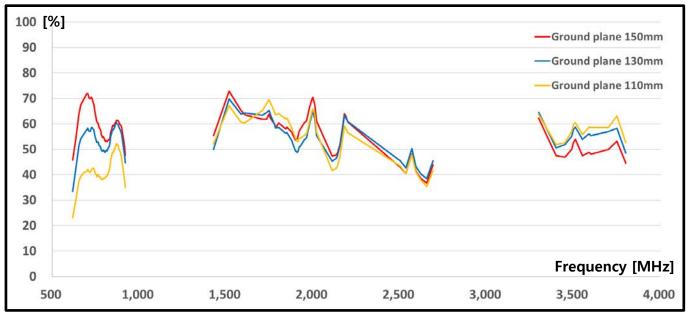


### RADIATION PATTERN

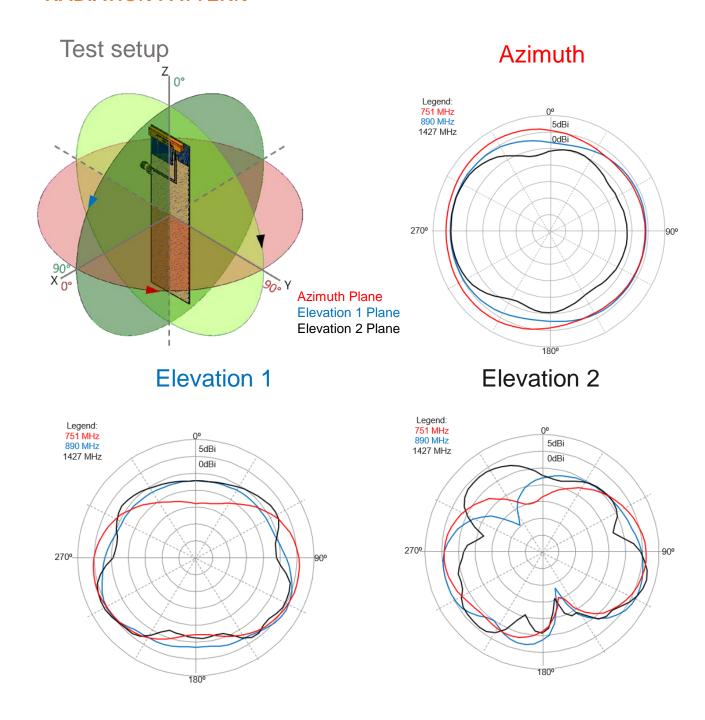


### RADIATION PATTERN

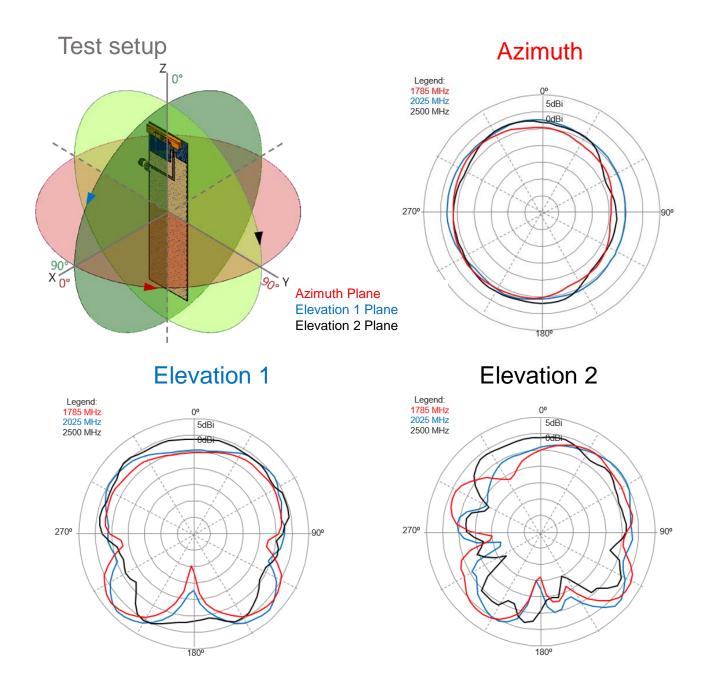


### RADIATION PATTERN

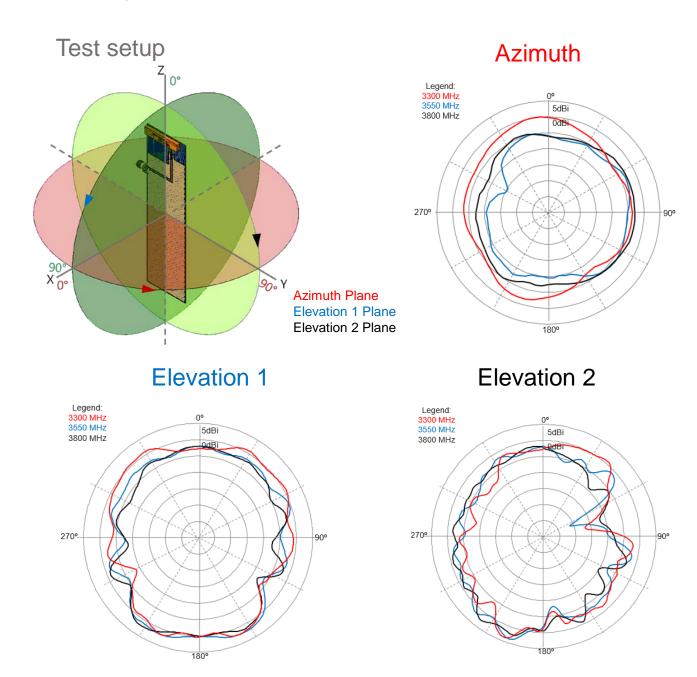

## **MOUNTING GUIDE**

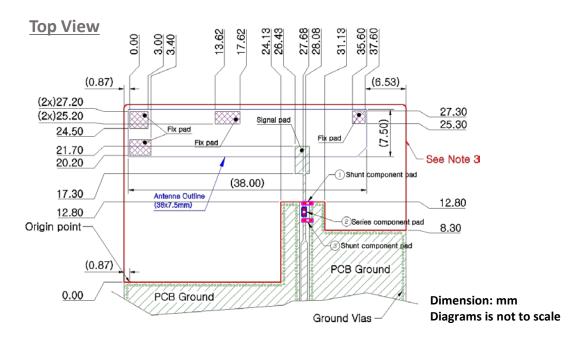


#### **Bottom View**

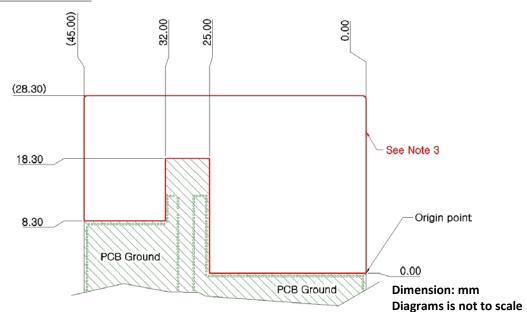


- NOTES: 1. Antenna must be mounted on the edge of PCB.
  - 2. NC = Non connection (mechanical mounting pads).
  - 3. No copper allowed in designated area on all PCB layers –
  - 4. For more information please call TE.
  - 5. Measured with below matching circuit condition.
    - 1 12nH, 2 2.7pF, 3NC
  - 6. Reference PCB Dimension(mm) 45.0 x 160.0 x 1.0


# **KEEP OUT AREA**

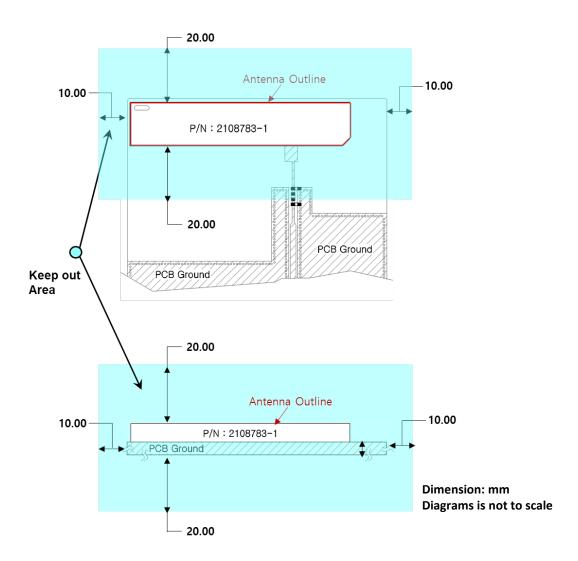


# **DIMENSIONS**



#### **PACKAGING**

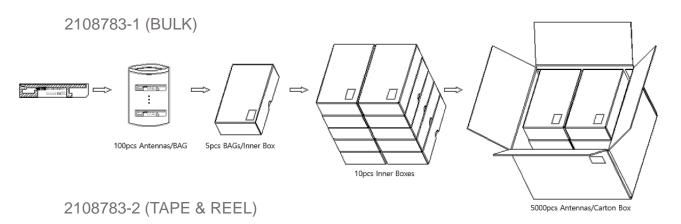

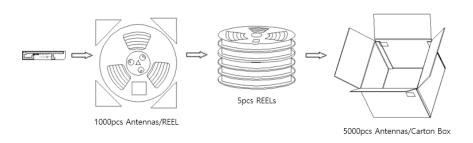

#### TE TECHNICAL SUPPORT CENTER

USA: +1 (800) 522-6752 Canada: +1 (905) 475-6222 Mexico: +52 (0) 55-1106-0800 Latin/S. America: +54 (0) 11-4733-2200 Germany: +49 (0) 6251-133-1999 UK: +44 (0) 800-267666 France: +33 (0) 1-3420-8686 +31 (0) 73-6246-999 Netherlands: China: +86 (0) 400-820-6015

For phone numbers in other countries, go to te.com/support-center

#### te.com

TE Connectivity, TE Connectivity (logo) are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2021 TE Connectivity Ltd. family of companies All Rights Reserved.

04/2021

