



# Wi-Fi 6/ 6E TRIPLE BAND EXTERNAL ANTENNA

Part Numbers: 2108923-1, 2108923-2

2108923-3, 2108923-4


### **FEATURES & BENEFITS**


- Wi-Fi 6, also including Wi-Fi 6E new 6GHz band, Bluetooth and ZigBee
- 90 degree hinge type SMA / RP-SMA connector terminal mount
- No matching circuits required


### **SPECIFICATIONS**

Frequency Range (MHz)	2400 - 2500	5150 - 5875	5925 – 7125	
VSWR	< 1.6:1	< 1.8:1	< 1.9:1	
Average Efficiency	85 %	85 %	74 %	
Peak Gain	2.5 dBi	3.2 dBi	3.5 dBi	
Average Gain	-0.7 dBi	-0.7 dBi	-1.4 dBi	
Power Handling	10 Watt cw			
Feed Point Impedance	50 ohms			
Polarization	Linear			
Size	19.91mm x 135.80 mm (Unfolded) 19.91mm x 115.00 mm (Folded)			
Weight	< 12.6 g			
Mounting	SMA Male / RP-SMA Male Terminal mount			
Mating Connectors	SMA Female / RP-SMA Female			
Operating Temperature	-40 to +85°C			
Storage Temperature	-40 to +85°C			
Packaging Specification	Bag & Box			
Hazardous Materials	A certificate of conformance is available from the product page on TE website			
Data measured in free space with hinge at 90 degree bend				


## **RF DATA**

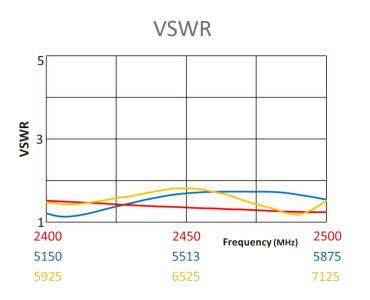

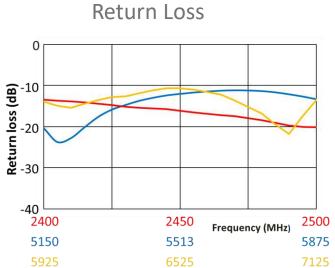


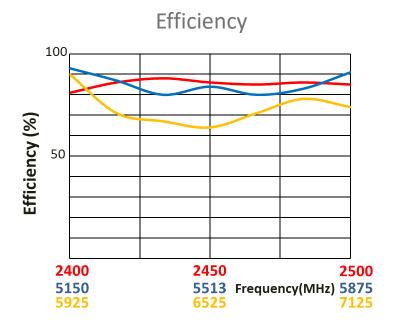

## **RADIATION PATTERN**

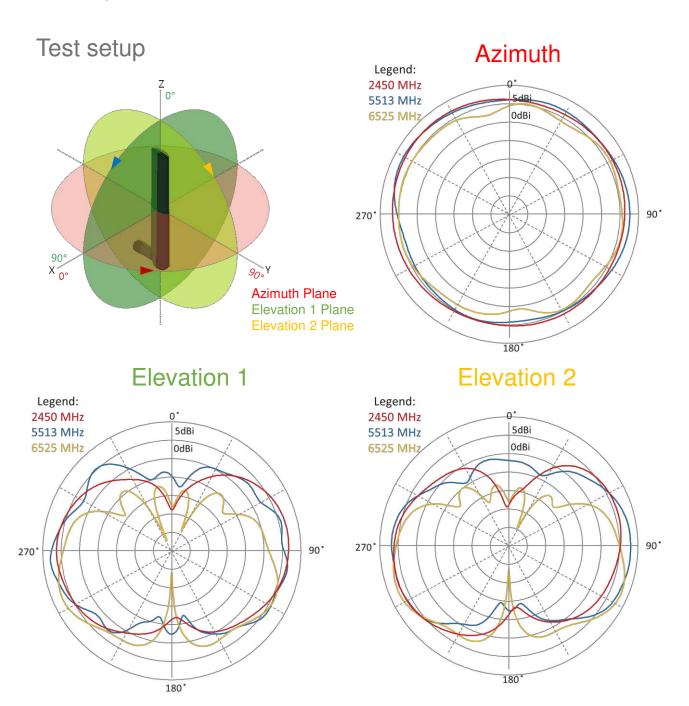


## **DIMENSIONS**

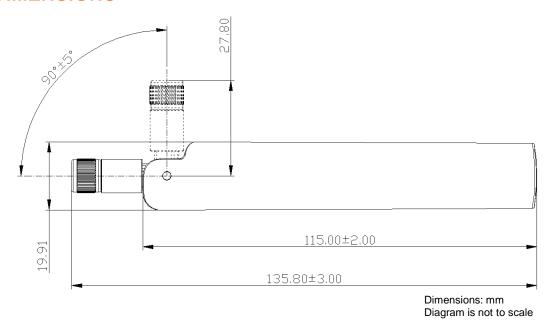


## **MATING COMPONENTS**

2108923-4	WHITE	RP-SMA (Male)	2016504-1: RP-SMA jack, right- angle, PCB-mount	2016693-2: RF CA, RP-SMA bulkhead to UMCC 2016693-4: RF CA, RP-SMA bulkhead to UMCC I	
2108923-3	BLACK	RP-SMA (Male)		2016695-2: RF CA, RP-SMA bulkhead to UMCC IV 2016695-4: RF CA, RP-SMA bulkhead to UMCC IV	
2108923-2	WHITE	SMA (Male)	5-1814400-2: SMA JACK, RIGHT ANGLE	2016682-2: SMA GEN1 (MHF type),1.13 cable, Length=100mm 2016682-4: SMA GEN1 (MHF type),1.13 cable, Length=200mm	
2108923-1	BLACK	SMA (Male)	5-1814832-2: SMA JACK, VERTICAL	2016694-2: SMA GEN4 (MHF4 type),1.13 cable, Length=100mm 2016694-4: SMA GEN4 (MHF4 type),1.13 cable, Length=200mm	
PART NUMBER	COLOR	CONNECT OR TYPE	RF CONNECTOR MATIN	SMA JACK TO MICRO COAX CABLE ASSEMBLIES ING COMPONENTS	

#### **PACKAGING**

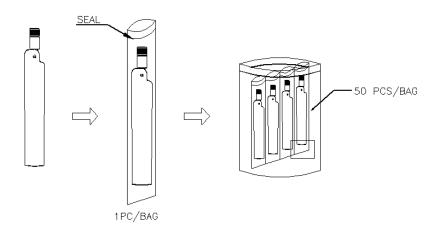

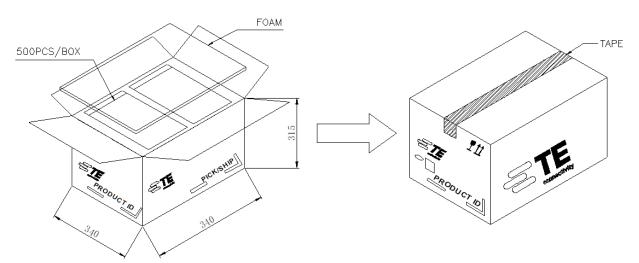

#### TE TECHNICAL SUPPORT CENTER

USA: +1 (800) 522-6752 Canada: +1 (905) 475-6222 Mexico: +52 (0) 55-1106-0800 Latin/S. America: +54 (0) 11-4733-2200 Germany: +49 (0) 6251-133-1999 UK: +44 (0) 800-267666 France: +33 (0) 1-3420-8686 +31 (0) 73-6246-999 Netherlands: China: +86 (0) 400-820-6015

For phone numbers in other countries, go to te.com/support-center

#### te.com

TE Connectivity, TE Connectivity (logo) are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2020 TE Connectivity Ltd. family of companies All Rights Reserved.

12/2022

