

# 2400-2485 & 5150-5875 MHz SLIM LINE DUAL BAND WLAN / BLUETOOTH ANTENNA

Part Numbers: 2118899-1, 2118899-2

2118899-3, 2118899-4

### **FEATURES & BENEFITS**


- Slim line (3mm height) WLAN Dual band stamped metal antenna element on PCB ground
- Patented innovate PIFA design for metal enclosure applications
- Reduced SINR (Signal-to-Interference-plus-Noise Ratio)
- Omnidirectional coverage
- Requires direct contact to plastic housing
- Wide selection of micro-coaxial cable lengths

## **SPECIFICATIONS** (with polycarbonate 1.5mm top cover and including losses of 278 mm cable)

| Frequency Range (MHz) | 2400-2485 5150-5875  |         |  |  |
|-----------------------|--|---------|--|--|
| VSWR                  | < 1.9 : 1 < 1.9 : 1  |         |  |  |
| Average Efficiency    | 45% 50%  |         |  |  |
| Peak Gain             | 1.0dBi   | 1.5dBi  |  |  |
| Average Gain          | -3.6dBi  | -3.0dBi |  |  |
| Power Handling        | 10 Watt cw   |         |  |  |
| Feed Point Impedance  | 50 ohms  |         |  |  |
| Polarization          | Linear   |         |  |  |
| Size                  | 54.50 mm x 54.50 mm x 3.80mm   |         |  |  |
| Weight                | < 8.0 g  |         |  |  |
| Mounting              | Under plastic housing  |         |  |  |
| Mating Connectors     | MHF and MHF 4L-type<br>Refer to page 5   |         |  |  |
| CABLE(Coaxial)        | 1.13mm Dia. Refer to page 5  |         |  |  |
| Operating Temperature | -40 to +85°C   |         |  |  |
| Storage Temperature   | -40 to +85°C   |         |  |  |
| Hazardous Materials   | A certificate of conformance is available from the product page on TE website. |         |  |  |



### **RF DATA**

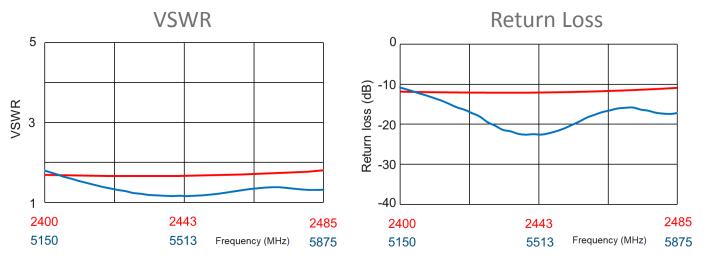




Data measured in free space and under plastic device enclosure




### RADIATION PATTERN

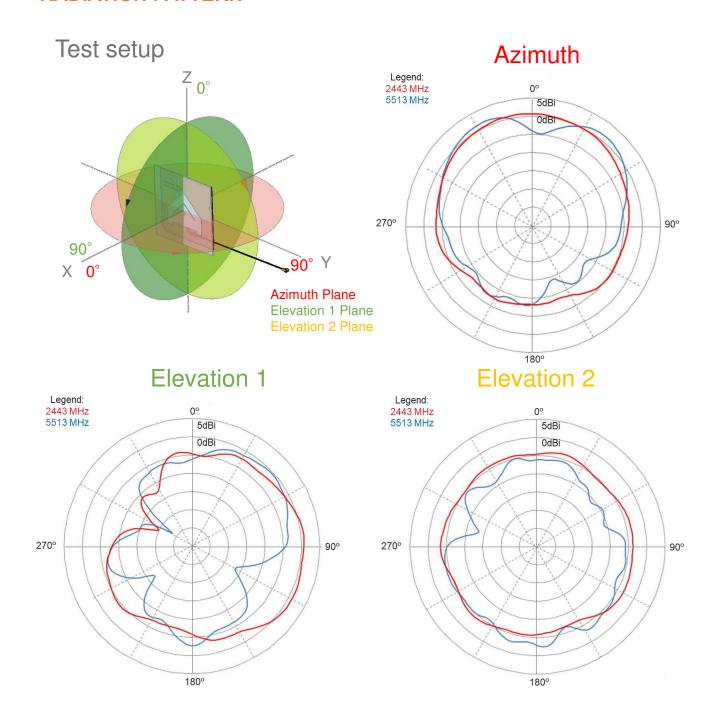

Data measured in free space and under plastic device enclosure



### **KEEP OUT AREA / APPLICATION**

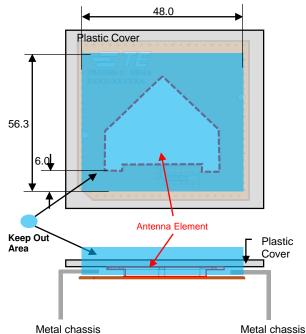


NOTES: 1. Antenna designed to be mounted under plastic cover.

- 2. Area in blue above indicates Keep Out Area.
- 3. No matching circuits required.
- 4. For more information please call TE.
- 5. Performance dependent on plastic material and position


#### APPLICATION DETAIL VIEW



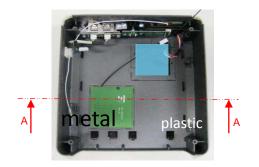

Dimensions: mm Diagram is not to scale

#### **DIMENSIONS**

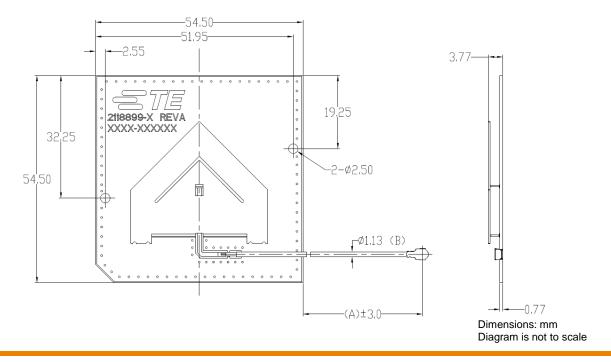

#### SLIM LINE DUAL BAND WLAN / BLUETOOTH ANTENNA


Standard Antenna Solutions



#### MATING COMPONENTS TO PART NUMBERS AND DIMENSIONS

| 2118899-1 | 278                 | 10.944 | 1.13         | MHF-TYPE PLUG   | RECEPTACLE (TE PN: 2337019-1) |       |
|-----------|---------------------|--------|--------------|-----------------|-------------------------------|-------|
| 2118899-2 | 480                 | 18.897 | 1.13         | MHF-TYPE PLUG   | RECEPTACLE (TE PN: 2337019-1) |       |
| 2118899-3 | 278                 | 10.944 | 1.13         | MHF4L-TYPE PLUG | RECEPTACLE (TE PN: 2334884-1) |       |
| 2118899-4 | 480                 | 18.897 | 1.13         | MHF4L-TYPE PLUG | RECEPTACLE (TE PN: 2334884-1) |       |
| PART      | MM                  | INCH   | MM           | CONNECTOR TYPE  | PART NUMBER                   | IMAGE |
| NUMBER    | CABLE<br>LENGTH (A) |        | CABLE O.D(B) | (01.01.51.5)    | MATING COMPONENTS             |       |

#### **PACKAGING**

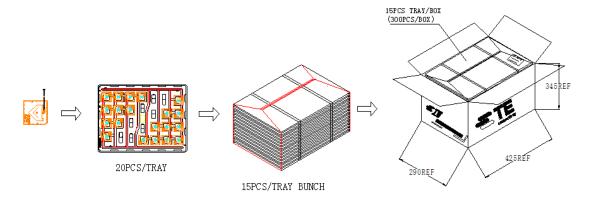

#### TE TECHNICAL SUPPORT CENTER

USA: +1 (800) 522-6752 Canada: +1 (905) 475-6222 +52 (0) 55-1106-0800 Mexico: Latin/S. America: +54 (0) 11-4733-2200 Germany: +49 (0) 6251-133-1999 UK: +44 (0) 800-267666 +33 (0) 1-3420-8686 France: Netherlands: +31 (0) 73-6246-999 China: +86 (0) 400-820-6015

For phone numbers in other countries, go to te.com/support-center

#### te.com

TE Connectivity, TE Connectivity (logo) are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2020 TE Connectivity Ltd. family of companies All Rights Reserved.

06/2022