

# **KEH SERIES**

## THREE PHASE VERY HIGH PERFORMANCE EMI FILTER

## DUAL STAGE DELTA CONFIGURATION

#### **INTRODUCTION**

High attenuation and very high performance when used in applications with low Impedance load controlling pulsed, continuous and intermittent interference noise and where high levels of mains borne interference are present.

#### **APPLICATION**

- Computer Server
- Robotics and Automation
- Elevators
- SMPS

#### **FEATURES**

- Dual Stage Filter
- Good Attenuation
- Chassis Mounting
- Low Leakage CurrentVery High Performance

#### APPROVALS AND COMPLIANCE

- UL Recognised
- CSA Certified






### **Specifications**

Electrical Characteristics							
Maximum Continuous Operating Voltage	440/520VAC						
Current Ratings	10A to 250A @40°C						
Operating Frequency	50/60Hz						
Lich Detential Test Valence 440VAC	Line to Ground 2632VDC for 1 Minute						
High Potential Test Voltage -440VAC	Line to Line 1892VDC for 1 Minute						
Link Detertial Test Valence F200/40	Line to Ground 2856VDC for 1 Minute						
High Potential Test Voltage -520VAC	Line to Line 2236VDC for 1 Minute						
Overload Capability	135% of Rated current for 15 minutes						





## **KEH Series**

Three Phase Very High Performance EMI Filter

Functional Characteristics							
Operating Temperature Range	-25°C to +85°C						
Climatic Category	25/85/21						
Termination (Depends on Current Rating)	Shock Proof (6-100A), Nut & Bolt (150-250A)						
Flammability Corresponding to	UL 94 V-0						

#### **Reference Standards**

Design Corresponding to

UL 60939-3 and CSA 22.2 No.8-13

#### Selection Table - Standard Version

TE Ordering	Catalog	Rated	Rated	Leakage Current	Weight	Termination	
Number	Number	Current @40°C	Voltage @40°C	(mA)	(Kgs)		≞
1-1609969-0	10KEHD10AFPD	10A	440 VAC	5	3	4	
1-1609969-1	15KEHD10AFPD	15A	440 VAC	5	3	4	
1-1609969-2	20KEHD10AFPD	20A	440 VAC	5	3	4	
1-1609969-3	40KEHD10AFPD	40A	440 VAC	6	4	10	
1-1609969-4	60KEHD10AFPD	60A	440 VAC	6	4	16	
1-1609969-5	80KEHD10AFPD	80A	440 VAC	10	8	25	
1-1609969-6	100KEHD10AFPD	100A	440 VAC	6	8	25	
1-1609969-7	150KEHD6AFPD	150A	440 VAC	20	9		M10
1-1609969-8	200KEHD6AFPD	200A	440 VAC	20	11		M10
1-1609969-9	250KEHD6AFPD	250A	440 VAC	20	11		M10
4-1609969-0	10KEHD10BFPD	10A	520 VAC	5	3	4	
4-1609969-1	15KEHD10BFPD	15A	520 VAC	5	3	4	
4-1609969-2	20KEHD10BFPD	20A	520 VAC	5	3	4	
4-1609969-3	40KEHD10BFPD	40A	520 VAC	6	4	10	
4-1609969-4	60KEHD10BFPD	60A	520 VAC	6	4	16	
4-1609969-5	80KEHD10BFPD	80A	520 VAC	10	8	25	
4-1609969-6	100KEHD10BFPD	100A	520 VAC	6	8	25	
4-1609969-7	150KEHD6BFPD	150A	520 VAC	20	9		M10
4-1609969-8	200KEHD6BFPD	200A	520 VAC	20	11		M10
4-1609969-9	250KEHD6BFPD	250A	520 VAC	20	11		M10

### **KEH Series** Three Phase Very High Performance EMI Filter

#### **Connectors Cross Section**


	4	10	16	25	50
Wire Section (mm <sup>2</sup> )	4mm <sup>2</sup>	10 mm²	16 mm²	25 mm²	50 mm²
Wire Section (AWG)	12AWG	8 AWG	6 AWG	4 AWG	1/0 AWG
Wire Stripping	max 10mm	max 13.5 mm	max 17 mm	max 17 mm	max 20 mm
Max Recommended Torque	0.5 Nm/4.5 in.lbs	1.2 Nm/10.8 in.lbs	2-2.2 Nm/ 18-19.8 in.lbs	2 Nm/18 in.lbs	6 Nm/54 in.lbs

## Insertion Loss (Typical) – Measured in Closed 50 $\Omega$ System

		Common Mode 50Ω/50Ω									
		Frequency in MHz									
		0.01	0.05	0.15	0.5	1	3	5	10	30	
	10A	70	71	75	86	81	63	54	40	38	
	15A	65	65	75	80	81	64	55	40	36	
	20A	41	44	55	72	67	58	51	38	21	
Rating	40A	11	20	72	75	77	66	62	51	32	
t Rat	60A	27	26	41	78	72	70	65	43	24	
Current	80A	10	8	37	75	65	57	50	44	28	
Cu	100A	3	8	35	77	68	57	51	42	28	
	150A	18	24	54	58	53	44	40	35	32	
	200A	19	22	52	56	54	42	40	35	32	
	250A	18	24	50	55	51	42	38	33	32	


		Common Mode 50 $\Omega$ /50 $\Omega$									
		Frequency in MHz									
		0.01	0.05	0.15	0.5	1	3	5	10	30	
	10A	51	53	64	82	84	63	48	19	22	
	15A	50	51	65	82	85	68	50	20	23	
	20A	48	46	60	79	79	59	45	20	26	
Rating	40A	29	36	76	78	79	64	48	23	26	
	60A	17	20	24	50	61	60	50	46	72	
Current	80A	28	29	32	72	66	46	36	27	22	
Cu	100A	28	29	32	75	66	46	37	27	25	
	150A	38	41	55	51	47	40	37	30	25	
	200A	38	41	55	50	45	40	35	30	22	
	250A	38	41	55	52	45	39	35	29	27	

## **Common Mode Insertion Loss (Typical in dB – Refer to table above)**

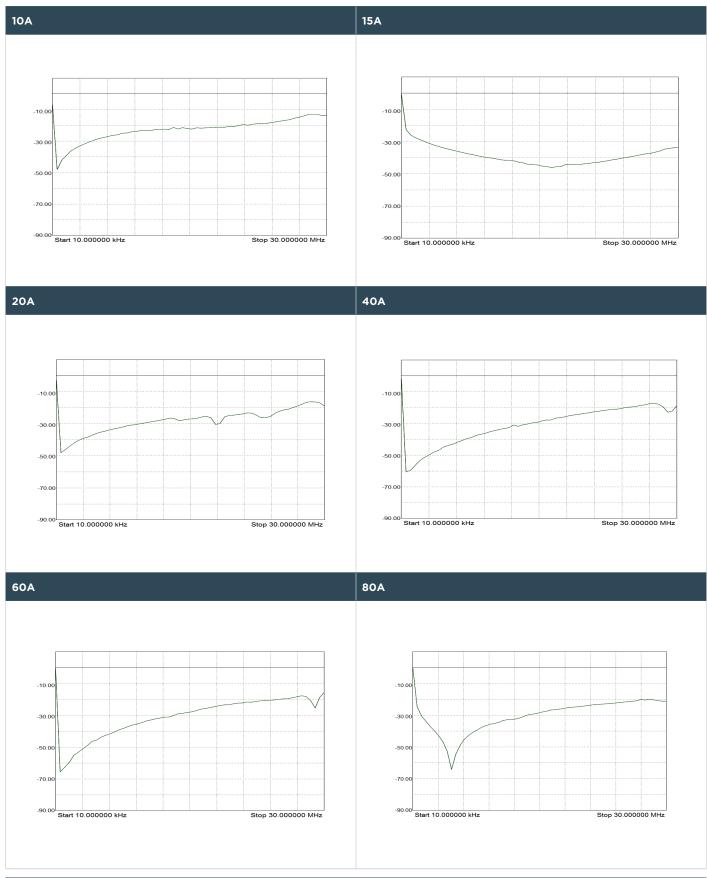


### **KEH Series**

Three Phase Very High Performance EMI Filter

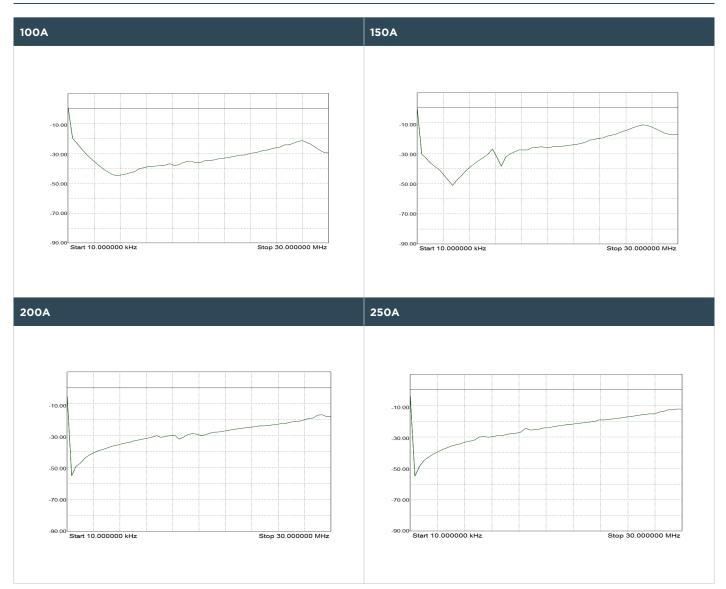


#### **KEH Series**

#### **Case Dimensions**

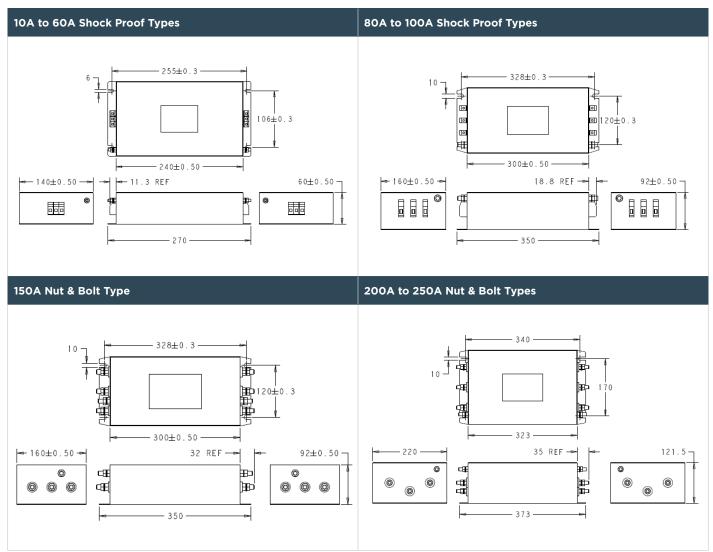

All dimensions in mm; Tolerances according: ISO2768-m

#### **HOW TO ORDER**

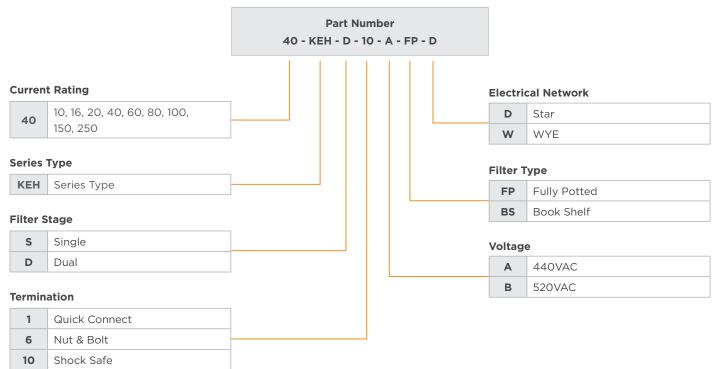

#### te.com

©2022 TE Connectivity. All Rights Reserved.

TE Connectivity, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

12/22 ED

