



MODEL 58 CRASH TEST ACCELEROMETER

Specifications

- DC Response Crash Test Accelerometer
- Next Generation Piezoresistive MEMS Sensor
- $\pm 50g$ to $\pm 6000g$ Dynamic Ranges
- Compliant to SAE J211/J2570
- Compliant to ISO 6487
- Most Trusted Crush Zone Accelerometer

Features

- Standard $<25mV$ ZMO
- Linearity $<1\%$
- 10,000g Shock Protection
- 2-10Vdc Excitation
- IP66 Environmentally Sealed
- Optimum Gas Damping
- Low Noise, Durable Cable

Applications

- Crush Zone Testing
- Auto Safety Testing Applications
- Shock and Impact Testing
- Transient Drop Testing
- Helmet Impact Testing

The TE Connectivity model 58 vibration sensor is the most popular auto safety test accelerometer used in crush zone installations. The accelerometer features the next evolution of the reliable piezoresistive MEMS sensor tailored for auto safety test applications. The model 58 accelerometer is available in ranges from $\pm 50g$ to $\pm 6000g$ and features a full-bridge configuration with a nominal 4000Ω impedance that offers quick warm-up time and minimal drift, unlike lower impedance designs on the market.

The accelerometer is packaged in a rugged housing with a shielded low-noise cable specifically designed for crush zone testing. The model 58 has a thick housing wall which allows user to mount the accelerometer on all four sides for various acceleration axes measurements. An ideal amount of internal gas damping provides outstanding shock survivability and a flat amplitude and phase response up to frequencies well beyond 7000Hz.

The model 58 accelerometer is fully encapsulated in Stycast for IP66 protection over the full operating temperature range of $-40^{\circ}C$ to $+121^{\circ}C$. TE Connectivity also supplies the calibration data in a user friendly excel format which enables high volume users to quickly upload the calibration information for each sensor installed.

[CLICK HERE >](#)
CONNECT WITH A SPECIALIST

MODEL 58 ACCELEROMETER

Performance Specifications

All values are typical at +24°C, 80Hz and 10Vdc excitation unless otherwise stated. TE Connectivity reserves the right to update and change these specifications without notice.

PARAMETERS

DYNAMIC							NOTES
Range (g)	±50	±100	±200	±500	±2000	±6000	
Sensitivity (mV/g) ¹	1.2-3.0	0.6-1.2	0.6-1.2	0.3-0.6	0.12-0.3	0.05-0.2	@10Vdc Excitation
Frequency Response (Hz)	0-900	0-1200	0-1400	0-1900	0-4000	0-4000	±5%
	0-1200	0-1600	0-1800	0-2700	0-6000	0-7000	±1dB
Natural Frequency (Hz)	4000	6000	8000	15000	26000	28000	
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	<3	<1% on 'T' Option
Non-Linearity (%FSO)	±1	±1	±1	±1	±1	±1	
Damping Ratio	0.5	0.5	0.5	0.3	0.15	0.10	
Shock Limit (g)	10000	10000	10000	10000	10000	10000	

ELECTRICAL

Zero Acceleration Output (mV)	<±25						Differential
Excitation Voltage (Vdc)	2 to 10						
Input Resistance (Ω)	3500-4500						
Output Resistance (Ω)	3500-4500						
Insulation Resistance (MΩ)	>100						@100Vdc
Residual Noise (μV RMS)	<10						
Ground Isolation	Isolated from mounting surface						
Warm-up Time	<10 seconds						@10Vdc Excitation

ENVIRONMENTAL

Thermal Zero Shift (%FSO/°C)	±0.04						From 0 to +50°C
Thermal Sensitivity Shift (%/°C)	-0.20 ±0.05						From 0 to +50°C
Operating Temperature (°C)	-40 to +100						
Storage Temperature (°C)	-40 to +100						
Humidity	Epoxy Sealed, IP66						

PHYSICAL

Case Material	Anodized Aluminum, Black						
Cable	4x #32 AWG Leads, PFA Insulated, Braided Shield, TPE Jacket						
Weight (grams)	1.2						Cable not included
Mounting	Adhesive, any orientation						


¹ Output is ratiometric to excitation voltage

Calibration supplied: CS-FREQ-0100 NIST Traceable Amplitude Calibration from 20Hz to ±5% Frequency Limit


Optional accessories: 121 3-Channel Precision Low Noise DC Amplifier

MODEL 58 ACCELEROMETER

Typical Frequency Response

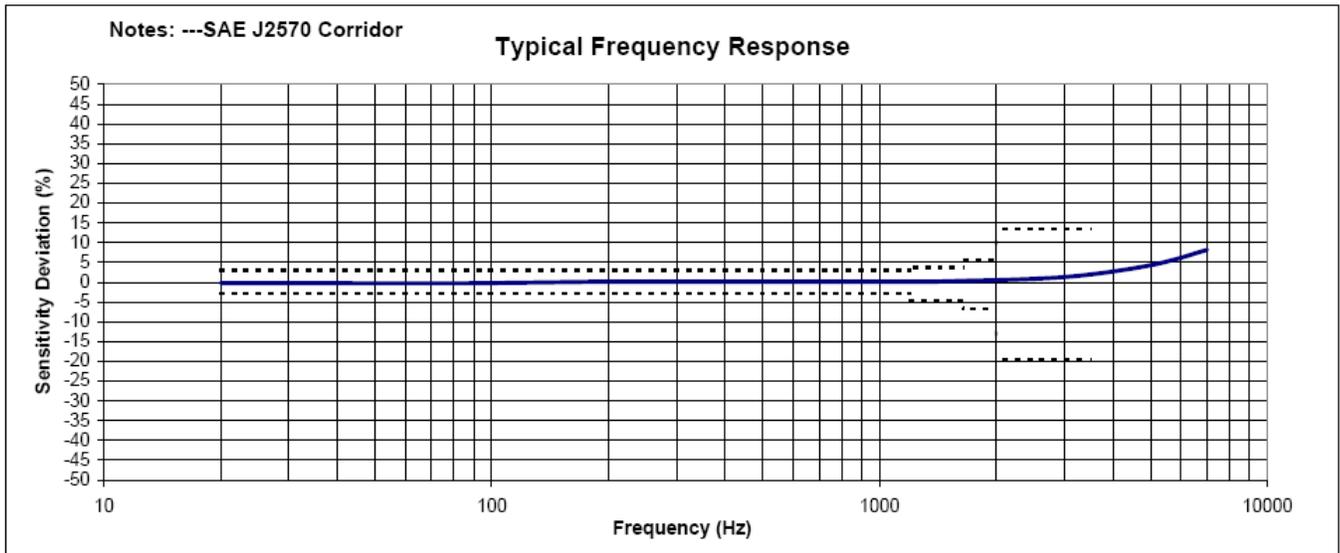


Schematic

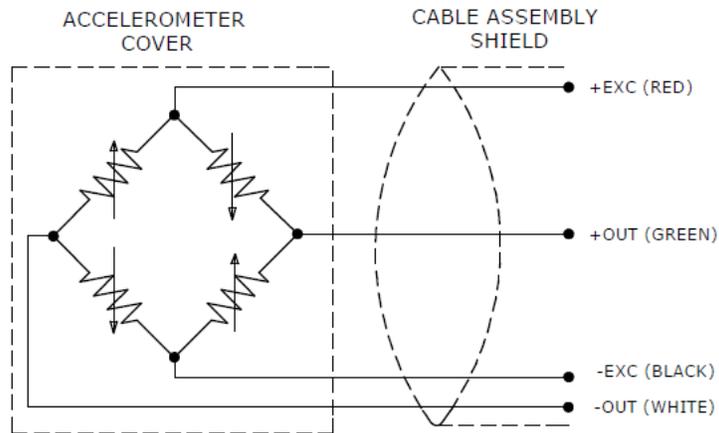

MODEL 58 ACCELEROMETER

Dimensions

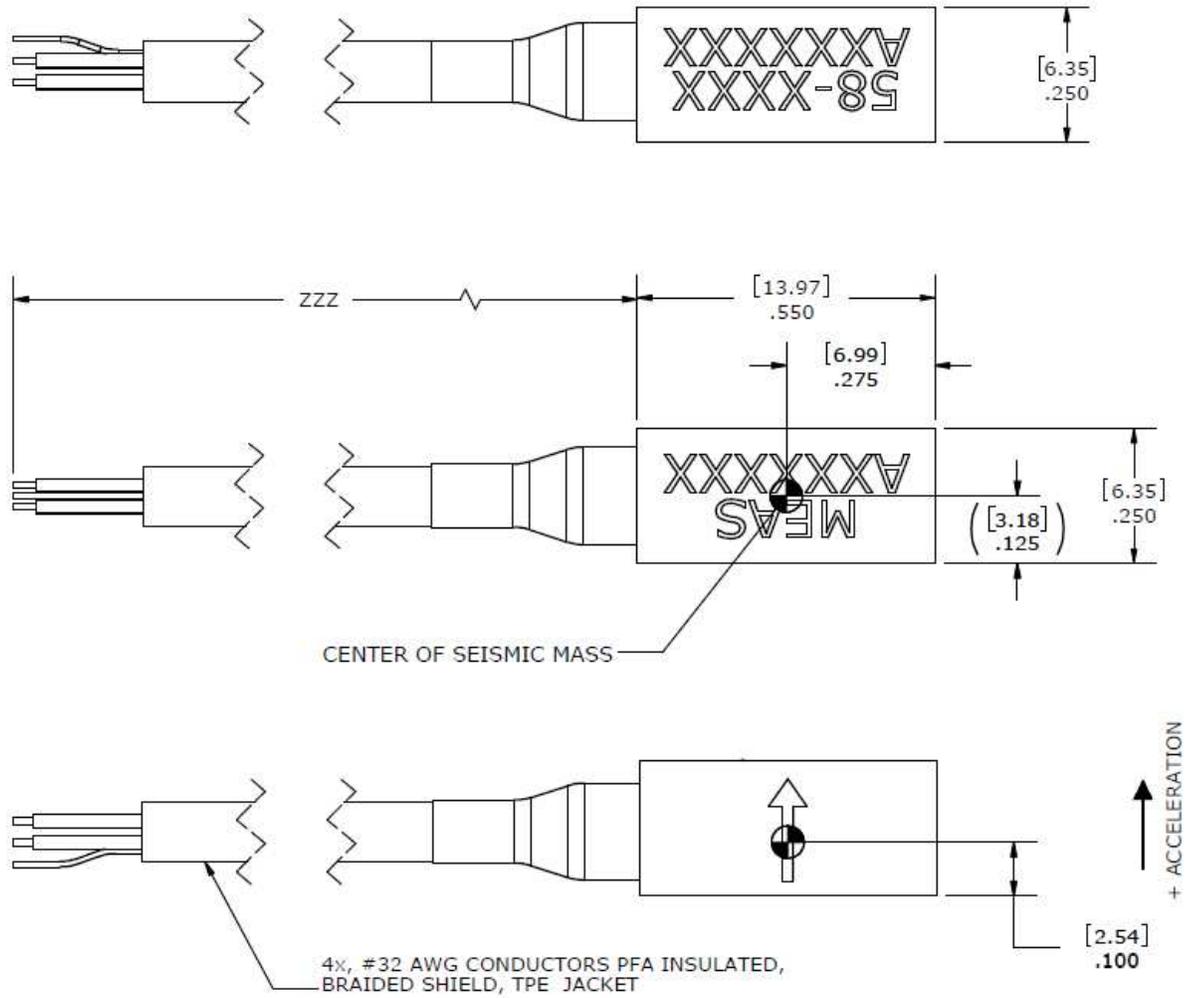

MODEL 58 ACCELEROMETER

Ordering Information

58	GGGG	ZZZ	T	XX
Range 0050 = 50g 0100 = 100g 0200 = 200g 0500 = 500g 2000 = 2000g 6000 = 6000g				
Cable length 240 = 240 inches, 20 feet 360 = 360 inches, 30 feet 276 = 276 inches, 7 meters				
Transverse Sensitivity Option Blank = <3% T = <1%				
Excitation Voltage Option Blank = 10Vdc 01 = 5Vdc 02 = 2Vdc				

Example;58-2000-360
Model 58, 2000g range, 360inch (30ft) cable length

Example;58-0500-276T
Model 58, 500g range, 276inch (7m) cable length, <1% transverse sensitivity option

CLICK HERE ›
CONNECT WITH A SPECIALIST

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
Tel: 800-522-6752
customercare.hmpt@te.com

EUROPE

MEAS France SAS
a TE Connectivity Company
Tel: +31 73 624 6999
customercare.lcsb@te.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
Tel: 0400-820-6015
customercare.shzn@te.com

te.com

TE Connectivity, TE, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2019 TE Connectivity Corporation. All Rights Reserved.

Version # 10/2020

