



WI-FI 6/6E TRIPLE BAND EMBEDDED ANTENNA

FEATURES & BENEFITS

- Wi-Fi 6 and Wi-Fi 6E 6GHz band, Bluetooth, ZigBee
- Adhesive backing on PCB simplifies mounting within the device
- Omnidirectional coverage
- No matching components required
- Ground-plane independent design
- Different cable length and connector options available

PART NUMBERS

PART NUMBER	CABLE LENGTH(A)		CABLE O.D(B), MM	CONNECTOR TYPE (ON CABLE)
	MM	INCH		
2344655-1	50	1.97	1.13	MHF-TYPE PLUG
2344655-2	100	3.94	1.13	MHF-TYPE PLUG
2344655-3	150	5.91	1.13	MHF-TYPE PLUG
2344655-4	200	7.87	1.13	MHF-TYPE PLUG
2344655-5	50	1.97	0.81	MHF4-TYPE PLUG
2344655-6	100	3.94	0.81	MHF4-TYPE PLUG
2344655-7	150	5.91	0.81	MHF4-TYPE PLUG
2344655-8	200	7.87	0.81	MHF4-TYPE PLUG

WI-FI 6/6E TRIPLE BAND EMBEDDED ANTENNA

Standard Antenna Solutions

SPECIFICATIONS


(Shown as 2344655-1 : Others can vary with different cable lengths.)

Frequency Range (MHz)	2400-2500	5150-5875	5925-7125
VSWR	< 2.7:1	< 1.8:1	< 1.8:1
Average Efficiency	62%	78%	75%
Peak Gain	1.4 dBi	3.7 dBi	5.9 dBi
Average Gain	-2.5 dB	-1.3 dB	-0.9 dB
Power Handling	10 Watt cw		
Feed Point Impedance	50 ohms unbalanced		
Polarization	Linear		
Size	33 mm x 8.0 mm x 1.0 mm		
Weight	< 1.2 g		
Mounting	Adhesive Tape		
Mating Connectors	MHF and MHF4-type, Refer to page 5		
Cable (Coaxial)	0.81mm and 1.13mm Dia., Refer to page 5		
Operating Temperature	-40 to +85°C		
Storage Temperature	-40 to +85°C		
Hazardous Materials	A certificate of conformance is available from the product page on TE website.		


RF DATA

(Shown as 2344655-1 : Others can vary with different cable lengths.)


VSWR

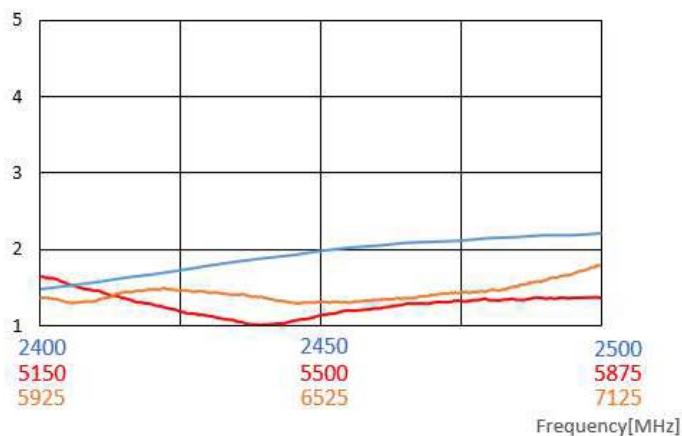

Return Loss

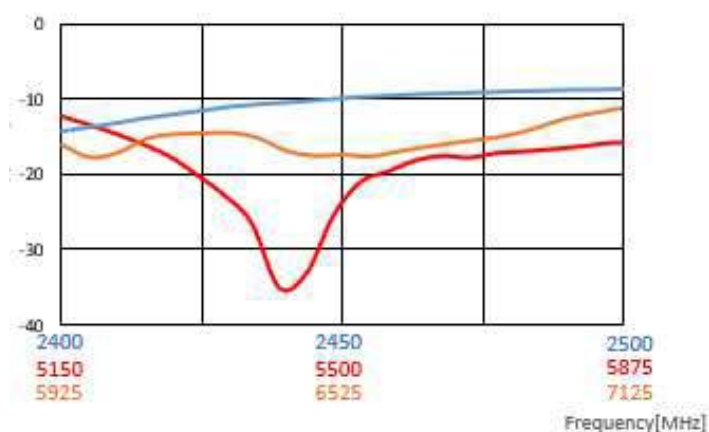


Efficiency

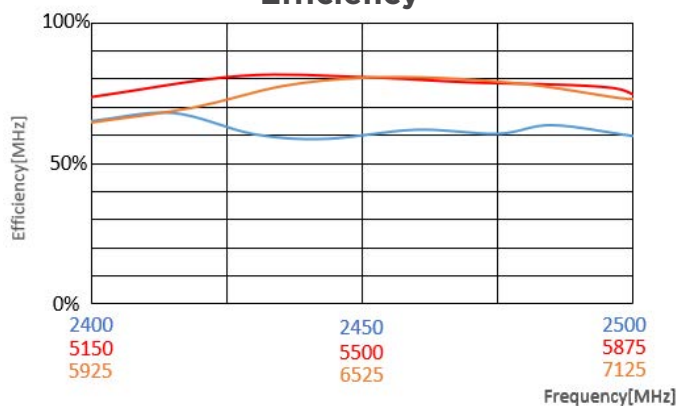

Data measured in free space and on plastic device enclosure

RADIATION PATTERN

(Shown as 2344655-1 : Others can vary with different cable lengths.)

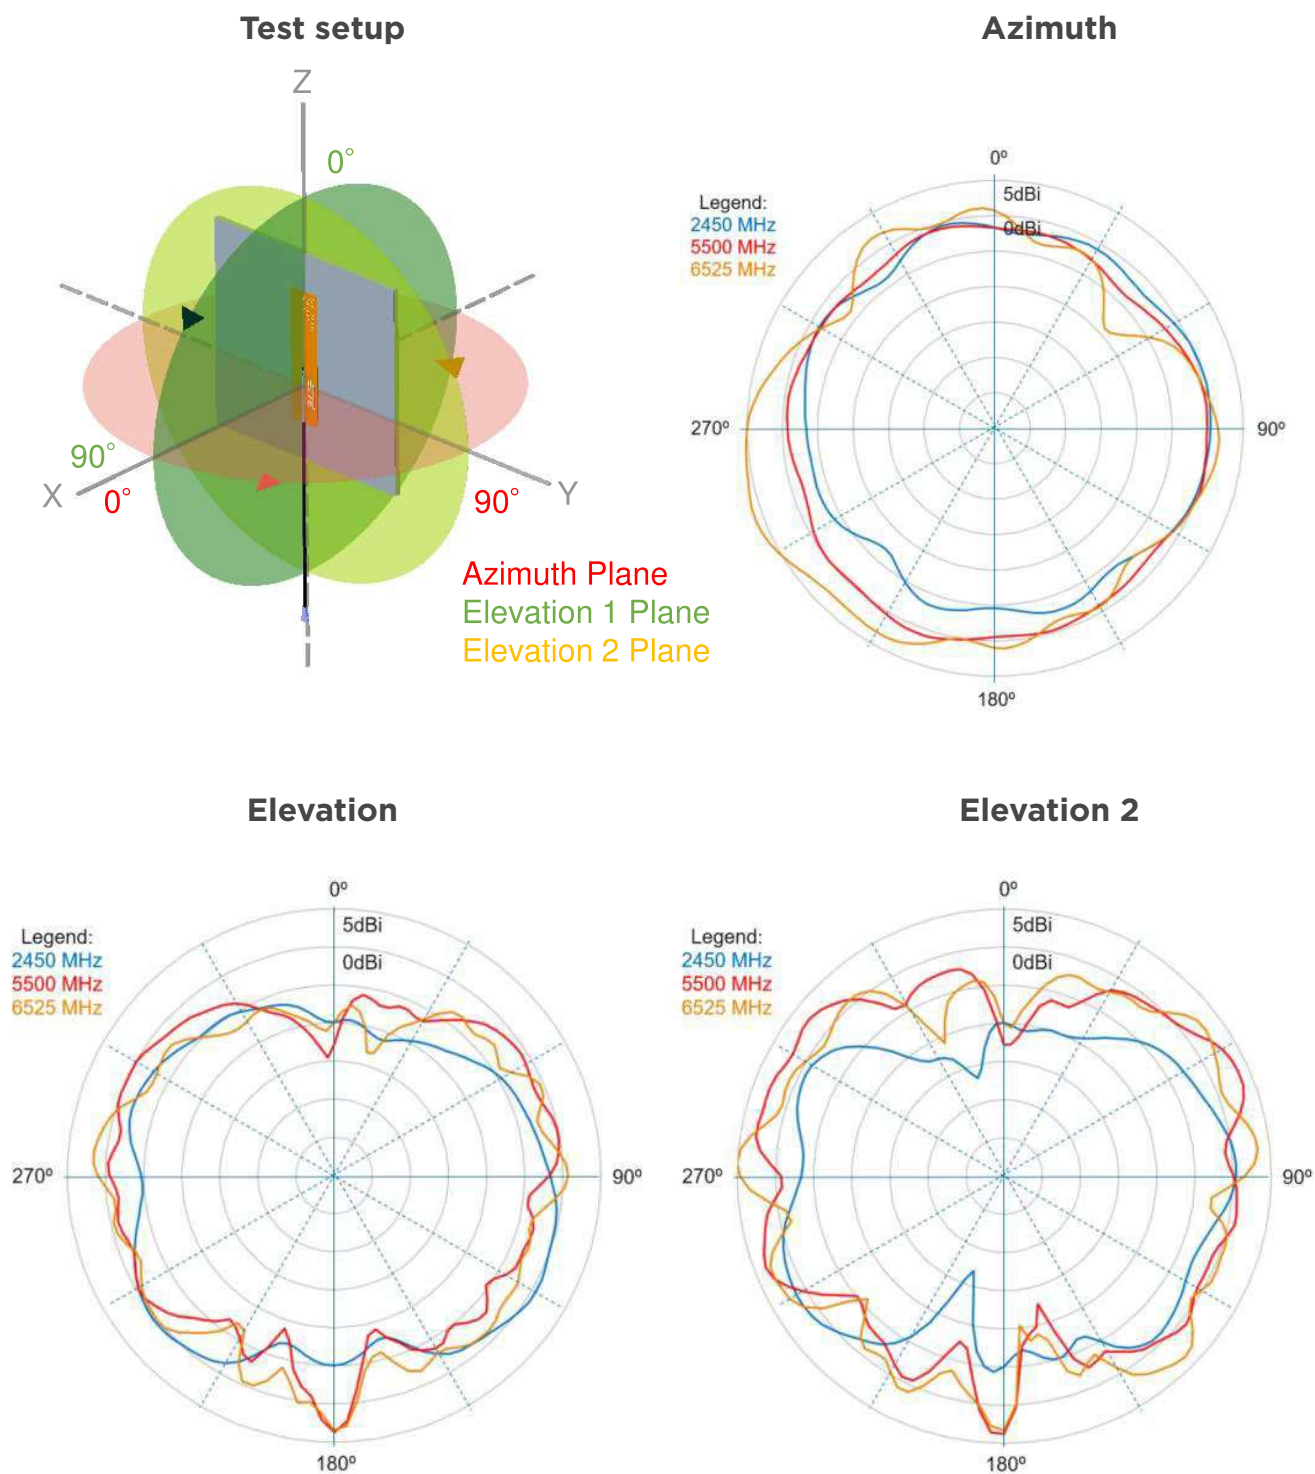


Data measured in free space and on plastic device enclosure

WI-FI 6/6E TRIPLE BAND EMBEDDED ANTENNA


Standard Antenna Solutions

KEEP OUT AREA

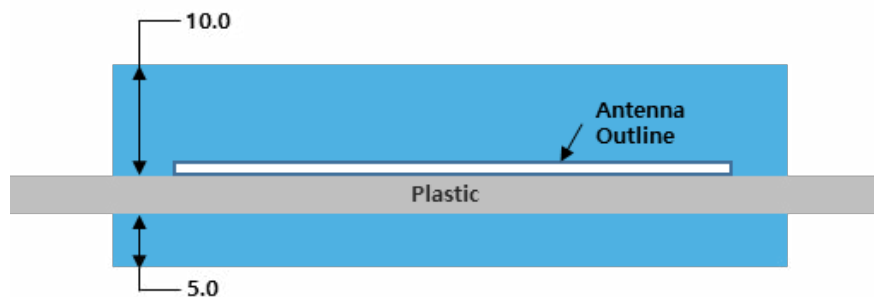

NOTES

1. Antenna designed to be mounted on plastic cover.
2. Area in blue indicates Keep Out Area
3. Contact TE if keep out zone cannot be guaranteed.

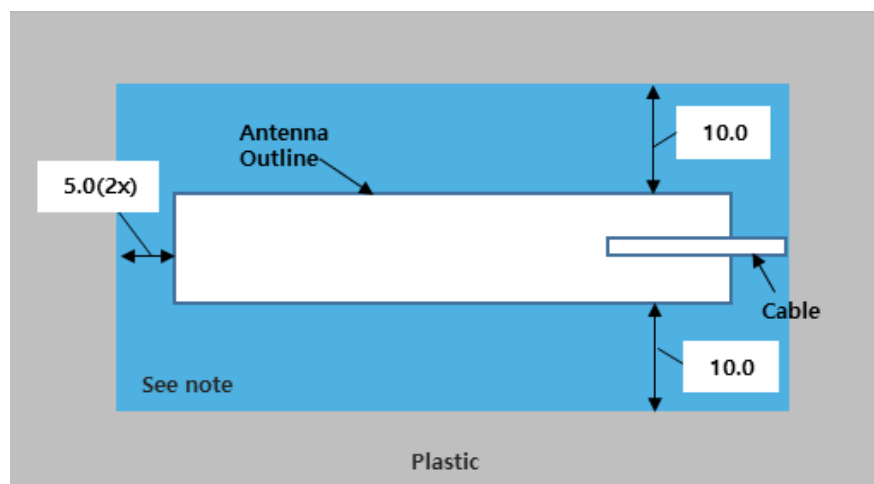


Dimension: mm

Diagram is not to scale

DIMENSIONS

(REFER TO PAGE 5 FOR DIMENSION "A" AND "B")

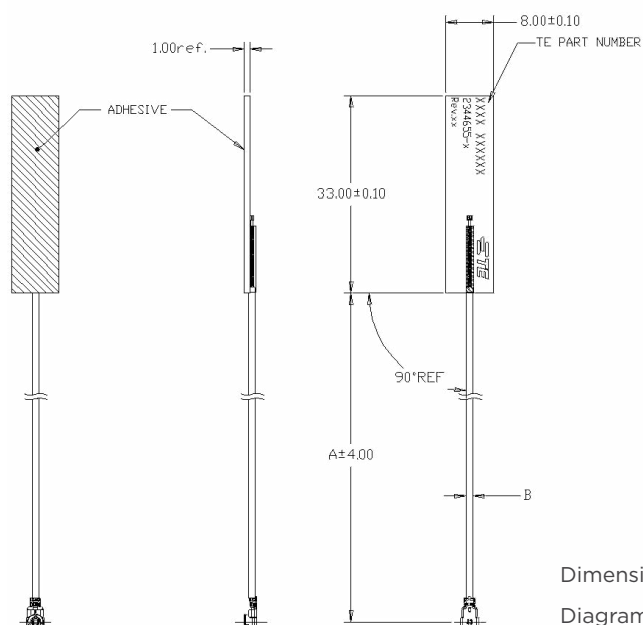



Dimension: mm

Diagram is not to scale

WI-FI 6/6E TRIPLE BAND EMBEDDED ANTENNA

Standard Antenna Solutions


MATING COMPONENTS TO PART NUMBERS AND DIMENSIONS

PART NUMBER	CABLE LENGTH(A)		CABLE O.D(B), MM	CONNECTOR TYPE (ON CABLE)	MATING COMPONENTS	
	MM	INCH			PART NUMBER	IMAGE
2344655-1	50	1.97	1.13	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	
2344655-2	100	3.94	1.13	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	
2344655-3	150	5.91	1.13	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	
2344655-4	200	7.87	1.13	MHF-TYPE PLUG	RECEPTACLE (TE PN: 2337019-1)	
2344655-5	50	1.97	0.81	MHF4-TYPE PLUG	RECEPTACLE (TE PN: 2334884-1)	
2344655-6	100	3.94	0.81	MHF4-TYPE PLUG	RECEPTACLE (TE PN: 2334884-1)	
2344655-7	150	5.91	0.81	MHF4-TYPE PLUG	RECEPTACLE (TE PN: 2334884-1)	
2344655-8	200	7.87	0.81	MHF4-TYPE PLUG	RECEPTACLE (TE PN: 2334884-1)	


PACKAGING



50PCS/BUNCH

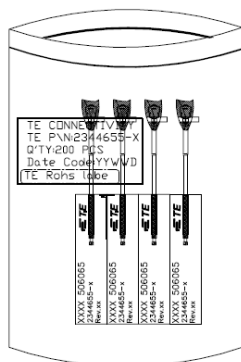

200PCS/BAG
DESICCANT:1PCS/BAG

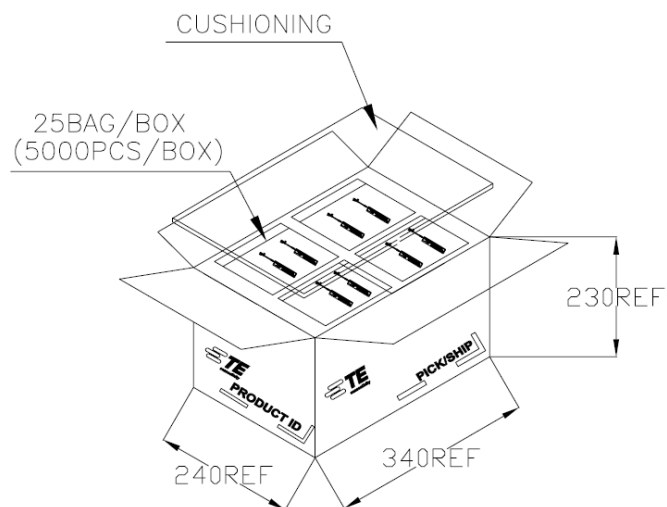

WI-FI 6/6E TRIPLE BAND EMBEDDED ANTENNA

Standard Antenna Solutions

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

For phone numbers in other countries, go to te.com/support-center

te.com

TE, TE Connectivity, TE connectivity (logo), and Splatch are trademarks owned or licensed by the TE Connectivity plc. family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

© 2024 TE Connectivity. All Rights Reserved.

12-24