

Features

- R_0 : 1000 Ω
- TCR 3850ppm/K
- Application temperature -30°C...200°C
- Resistance tolerance $\pm 0.04\%$
- Size 8 mm x 2.3 mm (length/diameter)
- Gold coated nickel wire

Applications

- Various Temperature feedback control
- Industrial applications
- Medical
- ...

PTRC101TG00

Platinum Temperature Sensor

PT100, 8 x 2.3, Class T, assembly, ceramic tube

Product Description

This sensor is a resistance temperature detector (RTD) using a platinum resistor as sensing element. This platinum resistor consists of a structured platinum film on a ceramic substrate, passivated by a ceramic cover. The connection wires are protected with glass ceramic on the welding area. This standard element is mounted into a ceramic tube. The material for the connection wire is gold coated nickel wire.

The characteristic curve of this Platinum RTD complies with DIN EN 60751. The usage of Platinum as resistive material guarantees high long term stability.

Due to relative small outline and low mass this RTD has a low time constant; therefore it is a suitable solution for fast and precise feedback control systems.

The sensor is designed for temperature applications up to 200°C.

Sensors are packed in slide blister.

- Platinum Temperature Sensor
- Conformal to DIN EN 60751
- Global interchangeability
- Wide temperature range
- Fast response time
- Class AA (F0.1) tolerance
- Small outline dimensions
- Gold coated nickel lead wires
- Slide blister packing

PTRC101TG00

Platinum Temperature Sensor

Sensor properties

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Nominal Resistance at 0 °C	R ₀	Class AA (F0.1)	99.96	100.00	100.04	Ω
Temperature Coefficient of Resistance	TCR	0 °C, 100 °C		3850		ppm/°C
Tolerance Temperature Range *		Class AA (F0.1)	-30		200	°C
Self-Heating Coefficient in air, flow: 1 m/s				0.3		°C/mW
Response Time Water Flow: 0.4 m/s	τ _{W,0.9}			1		s
Response Time Air Flow: 1 m/s	τ _{A,0.9}			20		s
Measuring Current		Class AA (F0.1)			1.0	mA
Lead wire Au-coated Ni-wire		Diameter length		0.2 8		mm mm

**possible operating temperature range is, -200°C to +600°C for Au-coated Ni- wire type.*

Specified accuracy is not guaranteed if the sensor is exposed to temperatures outside the specified tolerance temperature range.

Calculation Formulas

The calculation formulas of this Pt-RTD are defined in DIN EN 60751 as following:

For T ≥ 0 °C: $R_{(T)} = R_{(0)} \cdot (1 + a \cdot T + b \cdot T^2)$

For T < 0 °C: $R_{(T)} = R_{(0)} \cdot [1 + a \cdot T + b \cdot T^2 + c \cdot (T - 100^\circ\text{C}) \cdot T^3]$

Polynomial coefficients: $a = 3.9083\text{E-}03$ $b = -5.775\text{E-}07$ $c = -4.183\text{E-}12$

Tolerances: Class AA (F 0.1): $\pm (0.1 + 0.0017 \cdot |T/^\circ\text{C}|) \text{ } ^\circ\text{C}$ (-30 ... 200 °C)

PTRC101TG00

Platinum Temperature Sensor

Mechanical Dimensions

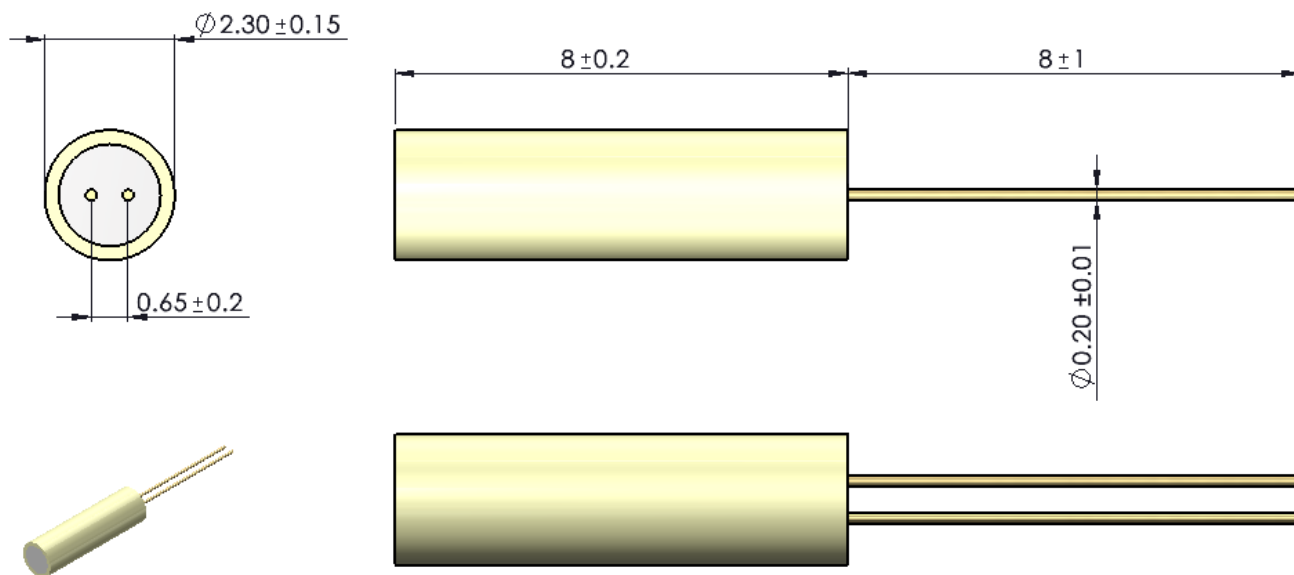


Figure 1: Mechanical dimensions of Platinum Temperature Sensor

Ordering Information

Description	Part Number	Configuration information
Pt100, 8.0x2.3, T, PTRC101TG00 (ASSY)	NB-PTCO-224	100 Ohms, $\varnothing$ 2.3 mm x 8 mm, F 0.1 (AA) Au-coated Ni-wire, ceramic tube

Packing and Minimum Order Quantity

Packing	PCS per Packing Unit	MOQ
Transparent Slide Blister 80 mm x 250 mm x 6 mm	50	50

NORTH AMERICA
Tel +1 800 522 6752

EUROPE
Tel +31 73 624 6999

ASIA
Tel +86 0400 820 6015

te.com/sensors

TE Connectivity, TE, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2022 TE Connectivity Corporation. All Rights Reserved.

Version # 04/2022

