



# **SPRING-LOADED LVDT** DC Operated Position Sensors MACRO GHSE 750 | GHSER 750 GHSI 750 | GHSIR 750

### Overview

Macro Sensors GHS 750 Series spring-loaded LVDTs are designed for a wide range of position measurement and dimensional gaging applications. These rugged, 3/4 inch diameter, hermetically sealed sensors are constructed entirely of stainless steel and are available in ranges of 0.100 inch (2.5 mm) to 4.00 inches (100 mm). The maximum linearity error for a GHS 750 Series sensor is ±0.10% of full range output. Units are supplied with built-in electronics for either DC operation with a pre-calibrated 0-10VDC output (GHSE) or 4-20 mA current loop operation (GHSI).

The sensor consists of a spring loaded shaft running in a precision sleeve bearing and connected to the core of the LVDT. The probe shaft is fully extended by a spring (k=0.23 lbs./in.), exerting a nominal force of 6 to 20 ounces depending upon total range. The hardened tool steel contact tip is an AGD standard number 9 and is fully interchangeable with other 4-48-threaded AGD contact tips. For simplified mounting, GHS sensors have a 1/2-20 UNF 2A thread on the front of the housing and are supplied with two hex nuts.

An air-extend/spring-retract option allows for a wide range of cycled position measurement and automated dimensional gaging applications. The shaft is extended by introduction of a low-pressure (10-40 psi), clean, dry air supply, with a regulated flow, through a barbed fitting on the end of the unit for 1/4 inch I.D. hose. With the release of pressure, an internal spring returns the probe to its retracted position.

### **Benefits**

- Ranges of 0.100 inch to 4.00 inches
- Non-linearity less than ±0.10%
- Repeatability OF <0.01%</li>
- 0-10VDC or 4-20mA outputs
- Rugged, stainless steel construction
- Coil environmentally sealed to IEC IP-68
- Axial or radial connectors w/ mating plug included
- Air-extend/spring-retract option

### **Applications**

- Industrial gaging systems
- Electronic dial indicators
- Fabricated metal products gaging
- Materials testing apparatus
- TIR measurements
- Steam turbine shell expansion
- Safety valve seating verification
- Pinch and gap roller alignment

### **Environmental Data**

Operating Temperature	-20 to 70°C (0 to 160°F)
Temperature Sensitivity	-0.027%/°C (-0.015%/°F) nominal
Ingress Protection	IP 68

# Performance

Linearity Error*	$\leq \pm 0.10\%$ of Full Range
Repeatability Error	<0.01% of FRO


\* -4000 units (4.00" [100mm] range) have linearity error of ≤±0.25% of full range

### **Electrical Data**


Output	0-10VDC	4-20mA
Input	12-26VDC	8-28VDC
Loop Resistance:	N/A	see graph at right
Current Consumption:	25 mA (max.)	-
Output Noise & Ripple:	≤0.005 Vrms	<10 µArms
Bandwidth; Electrical:	Range Dependent	(-3dB): DC to 50 Hz

## Dimensions


### **Axial Connector**



#### **Radial Connector**

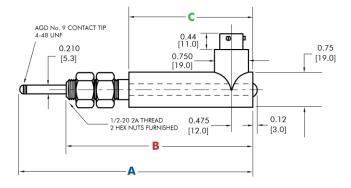

### Air Extend/Spring Retract



# Specifications

Parameter ▼	Code 🕨	100	250	500	1000	2000	4000
Danas	inches	0.100	0.250	0.500	1.00	2.00	4.00
Range	mm	2.5	6.3	12.7	25.4	50.8	101.6
	V/inch	100	40	20	10	5.0	2.5
Scale Factor	V/mm	4.0	1.6	0.8	0.4	0.2	0.1
Pretravel	inches	0.12	0.13	0.10	0.10	0.05	0.02
	mm	3.0	3.3	2.5	2.5	1.3	0.5
	inches	0.12	0.13	0.10	0.10	0.05	0.02
Overtravel	mm	3.0	3.3	2.5	2.5	1.3	0.5
	inches	5.46	6.10	6.86	11.36	13.82	21.75
Overall Length "A"	mm	139	155	174	289	351	553
	inches	5.12	5.59	6.16	10.16	11.72	17.71
Retracted Length "AR"	mm	130	142	156	258	298	450
Overall Length Minus	inches	4.36	4.99	5.75	9.87	11.40	17.19
Probe "B"	mm	111	127	146	251	291	437
	inches	2.82	3.44	4.20	6.70	8.20	11.71
Body Length "C"	mm	72	87	107	170	208	297
	ounces	3.1	3.6	4.3	6.4	6.7	10.5
Weight	mm	85	102	170	180	185	296

# **Ordering Information**

GHS	Е	R	750	10000	А
Series					
<b>Outputs</b> E = 0-10VDC I = 4-20mA					
Connector R = Radial Leave Blank for Axial					
0.750" (19 mm) Body Diameter					
Range (see table above) 100 = 0.100" (2.5 mm) 250 = 0.250" (6.3 mm) 4000 = 4.00" (101.6 mm) 500 = 0.500" (12.7 mm) 1000 = 1.00" (25.4 mm) 2000 = 2.00" (50.8 mm)					

Linearity Error Option

A = Air Extend/Spring Retract Leave Blank for Non-Air Extend/Spring Retract

### **Connector Wiring**

	Pin A	DC Out	Not Connected	1 K 1 K 2 A
	Pin B	Do Not Connect	Do Not Connect	800
	Pin C	Case Ground (Recommended)	Case Ground	600
	Pin D	Common	Not Connected	op Resist
PT02A-10-6P	Pin E	12-26VDC, 24VDC (nominal)	Loop +	<u>§</u> 200
Connector	Pin F	Not Connected	Loop -	

### Accessories

#### Cable Assemblies

Pre-built LVDT cable assemblies are available in lengths of 10, 30, or 50 feet for all Macro Sensors LVDTs with in-line or radial connectors. Cable assemblies are constructed of PVC-jacketed, multi-conductor, shielded cable, with a heavy-duty, 6-pin female, aluminum-alloy connector with soldered connections.

#### **NORTH AMERICA**

AST Macro Sensors, a TE Connectivity company Tel: 800-522-6752 Email: customercare.pens@te.com

#### **TE.com/sensorsolutions**

AST Macro Sensors, a TE Connectivity company.

AST Macro Sensors, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

GHSE 750 | GHSER 750 | GHSI 750 | GHSIR 750 11/01/15

GHSI (4-20 mA) Loop Resistance (Max.) vs. Loop Supply Voltage

> Loop Supply (Volts DC)

0 6 12 18 24 30

