

te.com



This compact stringpot with "voltage divider" output, provides ease-of-use and flexibility for measurement ranges up to 50 inches. Made of rugged polycarbonate, the SP1 fits in small spaces, doesn't need perfect alignment and ships with a stainless steel mounting bracket to let the user easily orient this sensor in just about any direction imaginable.

The SP1 is available with a connector, mating plug and sensor cover to protect against IP67 (wet) environments and a lower cost, "open" sensor version priced for both the budget conscious single piece user and the OEM alike.

SP₁

Compact String Pot | Voltage Divider

Linear Position to 50 inches (1270 mm) Rugged Polycarbonate Enclosure | IP67 Optional Mounting Bracket & Optional Sensor Cover w/Connector

SPECIFICATIONS

Available Stroke Ranges 0-4.75, 0-12.5, 0-25, 0-50 inches **Output Signal** voltage divider (potentiometric)

 $\pm 0.25\%$ to $\pm 1.00\%$ FS. (see ordering info) Accuracy

Repeatability ± 0.05% full stroke Resolution essentially infinite

Measuring Cable .019-inch dia. nylon-coated stainless steel

Maximum Cable Tension See ordering information **Measuring Cable Acceleration** See ordering information

Enclosure Material Polycarbonate

Sensor Plastic-hybrid precision potentiometer

Weight, max. (includes bracket) .4 lbs (.19 kg)

Electrical

Input Resistance 10K ohms. ±10%

Power Rating, Watts 2.0 at 70°F derated to 0 at 250°

Recommended Maximum Input 30 V (AC/DC)

Voltage

Output Signal Change Over Full

Stroke Range

Electrical Connection, SP1-xx

Electrical connection, SP1-xx-3

94% ±4% of input voltage

Solder terminals

4-pin, M12 connector

Environmental


Enclosure

Operating Temperature, SP1-xx Operating Temperature, SP1-xx-3


Vibration


IP 50 (SP1-xx), IP67 (SP1-xx-3) 0° to 160°F (-18° to 70°C) -40° to 160°F (-40° to 70°C)

up to 10 g to 2000 Hz maximum



1.9" [48 mm]





2.3" [59 mm] 2.5" [64 mm]

SENSOR SOLUTIONS /// SP1 REV A 08//2023 Page 1


Electrical Connection:




Signals +in common +out n/c

solder terminals	pin	pin - colorcode
#3 (cw)	1	1 - brown
#1 (ccw)	2	2 - white
#2 (s)	3	3 - blue
	4	4 - black

field installable connector (included)




cordset, part no. 9036810-0040 (optional)

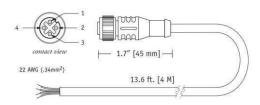


Page 2

Terminal/Pin Location (SP1-xx):


Output Signal:

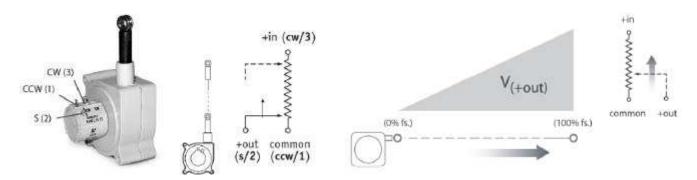


Mounting Options for SP1-xx:

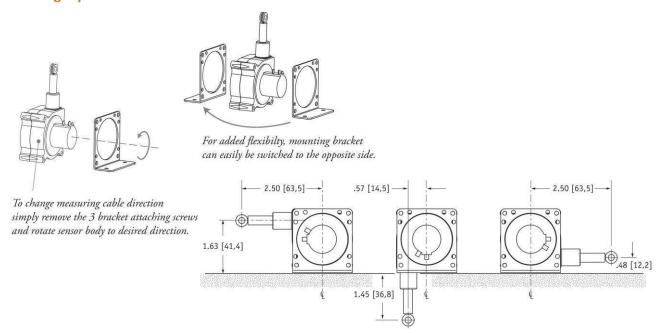


SP1-xx w/o Mounting Bracket:

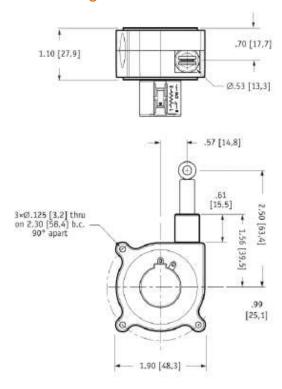


DIMENSIONS ARE IN INCHES (MM) tolerances are 0.041N, [1,0 MM] unless otherwise noted.




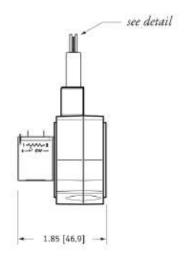


- * tolerance = +.005 -.001 [+0,1 -0,0]
- ** tolerance = +.005 -.005 [+0,1 -0,1]

SP1-xx w/ Mounting Bracket:

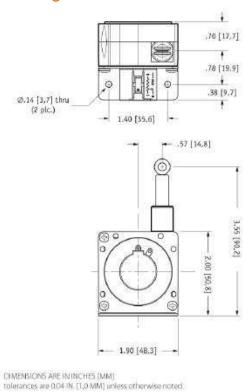







- * tolerance = + 005 = 001 [+0,1 =0,0] ** tolerance = + 005 = 005 [+0,1 =0,1]

Mounting Options for SP1-xx-3:

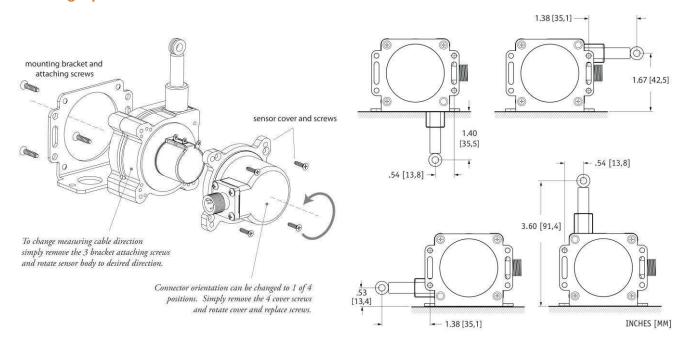


SP-xx-3 w/o Mounting Bracket:

tolerances are 0.04 IN. [1,0 MM] unless otherwise noted.

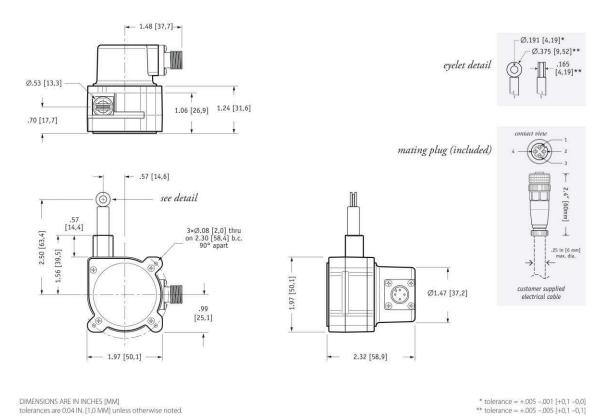


SENSOR SOLUTIONS /// SP1 REV A 08//2023 Page 4

SP1-xx-3 w/ Mounting Bracket:

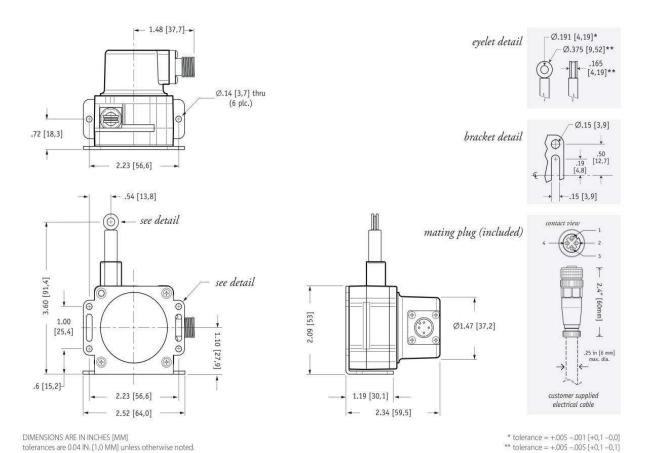

SENSOR SOLUTIONS /// SP1 REV A 08//2023 Page 5

Ordering Information:

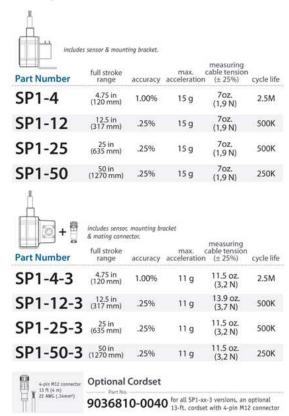

CLICK HERE > **CONNECT WITH A SPECIALIST**

NORTH AMERICA

Tel +1 800 522 6752

EUROPE

Tel +31 73 624 6999

ASIA

Tel +86 0400 820 6015

te.com/sensors

TE Connectivity, TE, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2021 TE Connectivity Corporation. All Rights Reserved.

Version # 08/2023

